



CCSDS

The Consultative Committee for Space Data Systems

**Draft Recommendation for
Space Data System Practices**

**DELTA-DIFFERENTIAL
ONE WAY RANGING
(DELTA-DOR)
OPERATIONS**

DRAFT RECOMMENDED PRACTICE

CCSDS 506.0-P-1.1

PINK BOOK

July 2016



CCSDS

The Consultative Committee for Space Data Systems

**Draft Recommendation for
Space Data System Practices**

**DELTA-DIFFERENTIAL
ONE WAY RANGING
(DELTA-DOR)
OPERATIONS**

DRAFT RECOMMENDED PRACTICE

CCSDS 506.0-P-1.1

PINK BOOK

July 2016

AUTHORITY

| | |
|-----------|----------------------|
| Issue: | Pink Book, Issue 1.1 |
| Date: | July 2016 |
| Location: | Washington, DC, USA |

(WHEN THIS RECOMMENDED PRACTICE IS FINALIZED, IT WILL CONTAIN THE FOLLOWING STATEMENT OF AUTHORITY:)

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-4), and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the e-mail address below.

This document is published and maintained by:

CCSDS Secretariat
National Aeronautics and Space Administration
Washington, DC, USA
E-mail: secretariat@mailman.ccsds.org

STATEMENT OF INTENT

(WHEN THIS RECOMMENDED PRACTICE IS FINALIZED, IT WILL CONTAIN THE FOLLOWING STATEMENT OF INTENT:)

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of its members. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommendations** and are not in themselves considered binding on any Agency.

CCSDS Recommendations take two forms: **Recommended Standards** that are prescriptive and are the formal vehicles by which CCSDS Agencies create the standards that specify how elements of their space mission support infrastructure shall operate and interoperate with others; and **Recommended Practices** that are more descriptive in nature and are intended to provide general guidance about how to approach a particular problem associated with space mission support. This **Recommended Practice** is issued by, and represents the consensus of, the CCSDS members. Endorsement of this **Recommended Practice** is entirely voluntary and does not imply a commitment by any Agency or organization to implement its recommendations in a prescriptive sense.

No later than five years from its date of issuance, this **Recommended Practice** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or (3) be retired or canceled.

In those instances when a new version of a **Recommended Practice** is issued, existing CCSDS-related member Practices and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each member to determine when such Practices or implementations are to be modified. Each member is, however, strongly encouraged to direct planning for its new Practices and implementations towards the later version of the Recommended Practice.

FOREWORD

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommended Practice is therefore subject to CCSDS document management and change control procedures, which are defined in the *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-4). Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be sent to the CCSDS Secretariat at the e-mail address indicated on page i.

At time of publication, the active Member and Observer Agencies of the CCSDS were:

Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Federal Space Agency (FSA)/Russian Federation.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.
- UK Space Agency/United Kingdom.

Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSP0)/Belgium.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- China Satellite Launch and Tracking Control General, Beijing Institute of Tracking and Telecommunications Technology (CLTC/BITTT)/China.
- Chinese Academy of Sciences (CAS)/China.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- Danish National Space Center (DNSC)/Denmark.
- Departamento de Ciência e Tecnologia Aeroespacial (DCTA)/Brazil.
- Electronics and Telecommunications Research Institute (ETRI)/Korea.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Agency of the Republic of Kazakhstan (NSARK)/Kazakhstan.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- South African National Space Agency (SANSA)/Republic of South Africa.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.
- Swiss Space Office (SSO)/Switzerland.
- United States Geological Survey (USGS)/USA.

PREFACE

This document is a draft CCSDS Recommended Practice. Its ‘Red Book’ status indicates that the CCSDS believes the document to be technically mature and has released it for formal review by appropriate technical organizations. As such, its technical contents are not stable, and several iterations of it may occur in response to comments received during the review process.

Implementers are cautioned **not** to fabricate any final equipment in accordance with this document’s technical content.

DOCUMENT CONTROL

| Document | Title | Date | Status |
|----------------------|--|------------|---|
| CCSDS 506.0-M-1 | Delta-Differential One Way Ranging (Delta-DOR) Operations, Recommended Practice, Issue 1 | April 2011 | Original issue |
| CCSDS 506.0-P-1.1 | Delta-Differential One Way Ranging (Delta-DOR) Operations, Draft Recommended Practice, Issue 1.1 | July 2016 | Current draft update: <ul style="list-style-type: none"> – adds clarifications – adds subsection on quantitative validation criteria – renames ‘Service Request’ to ‘Support Request’ – adds Support Request specifications – adds examples of Support Requests as new annex – deletes section 7 in favor of new reference to proposed <i>Delta-DOR Quasar Catalogue</i> |

CONTENTS

| <u>Section</u> | <u>Page</u> |
|--|-------------|
| 1 INTRODUCTION..... | 1-1 |
| 1.1 PURPOSE..... | 1-1 |
| 1.2 SCOPE AND APPLICABILITY..... | 1-2 |
| 1.3 CONVENTIONS AND DEFINITIONS..... | 1-2 |
| 1.4 STRUCTURE OF THIS DOCUMENT..... | 1-3 |
| 1.5 REFERENCES | 1-4 |
| 2 OVERVIEW | 2-1 |
| 2.1 GENERAL..... | 2-1 |
| 2.2 THE DELTA-DOR TECHNIQUE..... | 2-1 |
| 2.3 ADVANTAGES OF DELTA-DOR | 2-4 |
| 2.4 LIMITATIONS OF DELTA-DOR..... | 2-5 |
| 3 DEFINITIONS FOR INTERAGENCY DELTA-DOR..... | 3-1 |
| 3.1 OVERVIEW | 3-1 |
| 3.2 ROLES OF PARTICIPATING AGENCIES IN OPERATIONAL SCENARIOS | 3-1 |
| 3.3 ROLES OF PARTICIPATING AGENCIES IN VALIDATION SCENARIOS | 3-1 |
| 3.4 DEFINITION OF THE OPERATIONAL SCENARIOS..... | 3-1 |
| 3.5 DEFINITION OF THE VALIDATION SCENARIOS..... | 3-2 |
| 3.6 DEFINITION OF THE INTERFACES..... | 3-2 |
| 3.7 DEFINITION OF PARAMETERS INTERVENING IN THE MEASUREMENT | 3-4 |
| 4 DESCRIPTION OF OPERATIONAL SCENARIOS | 4-1 |
| 4.1 OVERVIEW | 4-1 |
| 4.2 SCENARIO 1 | 4-1 |
| 4.3 SCENARIO 2 | 4-3 |
| 4.4 SCENARIO 3 | 4-5 |
| 4.5 SCENARIO 4 | 4-7 |
| 5 DESCRIPTION OF VALIDATION PROCESS..... | 5-1 |
| 5.1 OVERVIEW | 5-1 |
| 5.2 INTEROPERABILITY VALIDATION STEP 1—TRAJECTORY PREDICTION AND OBSERVABLE MODELING..... | 5-1 |

CONTENTS (continued)

| Section | Page |
|--|-----------------------|
| 5.3 INTEROPERABILITY VALIDATION STEP 2—DATA COLLECTION | 5-3 |
| 5.4 INTEROPERABILITY VALIDATION STEP 3—DATA PROCESSING | 5-5 |
| <u>5.5 QUANTITATIVE VALIDATION CRITERIA</u> | <u>5-7</u> |
| 6 INTERAGENCY DATA EXCHANGE PRODUCTS AND PROCEDURES | 6-1 |
| 6.1 GENERAL..... | 6-1 |
| 6.2 SERVICE <u>DELTA-DOR SUPPORT</u> REQUEST MESSAGE EXCHANGE SPECIFICATIONS..... | 6-1 |
| 6.3 ORBITAL EPHEMERIS MESSAGEFILES EXCHANGE SPECIFICATIONS.. | 6-9 |
| 6.4 RAW DELTA-DOR DATA TRANSFER/EXCHANGE SPECIFICATIONS..... | 6-9 |
| 6.5 METEO DATA EXCHANGE SPECIFICATIONS..... | 6-10 |
| 6.6 REDUCED DELTA-DOR DATA TRANSFER/EXCHANGE SPECIFICATIONS | 6-11 |
| 7 RADIO SOURCE CATALOGUE SPECIFICATION | 7-1 |
| ANNEX A ITEMS FOR AN IMPLEMENTING ARRANGEMENT (IA) (NORMATIVE) | A-1 |
| ANNEX B SECURITY (INFORMATIVE)..... | B-1 |
| ANNEX C SUPPORT REQUEST EXAMPLES (INFORMATIVE)..... | C-1 |
| ANNEX D ABBREVIATIONS AND ACRONYMS (INFORMATIVE)..... | D-1 |
| ANNEX E INFORMATIVE REFERENCES (INFORMATIVE) | E-1 |
| <u>Figure</u> | |
| 2-1 Delta-DOR Observation Geometry | 2-2 |
| 2-2 Error Ellipses in the Mars Targeting Plane | 2-5 |
| 3-1 High-Level Delta-DOR Flow <u>Interface Definition</u> | 3-3 |
| <u>Table</u> | |
| 3-1 Definition of Cross-Support Scenarios | 3-2 |
| 3-2 Definition of Cross-Support Validation Scenarios | 3-2 |
| 6-1 Definition of Delta-DOR Service <u>Support</u> Request Parameters..... | 6-2 |

1 INTRODUCTION

1.1 PURPOSE

This Recommended Practice specifies a set of standard practices and message formats for use in the navigation technique known as Delta Differential One-Way Ranging (Delta-DOR). It has been developed via consensus of the Delta-DOR Working Group of the CCSDS Systems Engineering Area (SEA).

Delta-DOR is a Very Long Baseline Interferometry (VLBI) technique that can be used in conjunction with Doppler and ranging data to improve spacecraft navigation by more efficiently determining spacecraft angular position in the plane of sky. The establishment of interoperability for acquiring and processing Delta-DOR data at ground stations of different agencies, the standardization of [service support](#) request for Delta-DOR, the standardization of an exchange format for raw data, and standardization of interfaces for exchange of supporting products are key enablers for interagency execution of Delta-DOR operations.

The Recommended Practice addresses aspects of the technique that require standardization in order to enable Delta-DOR interoperability between space agencies, e.g., configuration requirements for interagency Delta-DOR measurement; interagency exchange of measurement data; parameters that are necessary in order to correlate and process the data at one of the agencies; interagency transfer of the generated observables; and the end-to-end flow of control. It is believed that such standards will reduce development and operations costs while improving navigation capabilities by increasing the number of intercontinental ground station baselines.

There are essentially three parts to providing Delta-DOR services, the first being the definition of the RF domain signals and reception, the second being the definition of the input and output data products, and the third being the definition of the method for requesting service and transferring data products. The first of these is allocated to the CCSDS Space Link Service (SLS) Area (reference [1]); the second is allocated to the Mission Operations and Information Management Services (MOIMS) Area (reference [3]); the third will be developed as SLE [ServiceSupport](#) Request extensions which will be allocated to the Service Management Working Group within the Cross Support Services (CSS) Area (reference [E9]).

The purpose of this Magenta Book is the production of a set of recommendations for facilitating interagency Delta-DOR operations that can both be useful now and evolve to meet future needs. The present document is intended to provide a set of standard practices to be used for setting up Delta-DOR measurements among different agencies, covering all of the required elements and describing how they are combined to provide the desired service.

[Also, this book provides recommendations on the methodology for validating the main functions involved in a Delta-DOR measurement execution and introduces quantitative criteria to assess the level of performance of the validated capability.](#)

1.2 SCOPE AND APPLICABILITY

Delta-DOR operations are applicable to space agencies that operate deep space missions that require accurate determination of the spacecraft position in the plane of the sky. For operations where these requirements do not capture the needs of the participating agencies, Delta-DOR operations may not be appropriate.

This Recommended Practice addresses rationale, requirements and criteria that Delta-DOR operations processes should be designed to meet.

1.3 CONVENTIONS AND DEFINITIONS

1.3.1 GENERAL

Conventions and definitions of Delta-DOR concepts are provided in reference [E1], *Delta-DOR-Operations—Technical Characteristics and Performance*. This reference provides a detailed description of the Delta-DOR technique, including guidelines for DOR tone spectra, guidelines for selecting reference sources, applicable foundation equations, and a discussion of error sources and measurement accuracy that are not germane to the recommendations presented in this document.

1.3.2 NOMENCLATURE

1.3.2.1 Normative Text

The following conventions apply ~~throughout~~for the normative specifications in this Recommended Practice:

- the words ‘shall’ and ‘must’ imply a binding and verifiable specification;
- the word ‘should’ implies an optional, but desirable, specification;
- the word ‘may’ implies an optional specification;
- the words ‘is’, ‘are’, and ‘will’ imply statements of fact.

NOTE – These conventions do not imply constraints on diction in text that is clearly informative in nature.

1.3.2.2 Informative Text

In the normative sections of this document, informative text is set off from the normative specifications either in notes or under one of the following subsection headings:

- Overview;
- Background;

- [Rationale](#);
- [Discussion](#).

1.3.3 COMMON DELTA-DOR TERMINOLOGY

Part of the standardization process involves the determination of common interagency terminology and definitions that apply to interagency Delta-DOR. The following ~~conventions apply throughout~~ [terms are used in](#) this Recommended Practice:

| Term | Meaning |
|-----------------------|--|
| baseline | The vector joining two tracking stations |
| channel | A slice of the frequency spectrum that contains a spacecraft or quasar signal |
| scan | An observation of a radio source (spacecraft or quasar) , typical duration of a few minutes |
| spanned bandwidth | The widest frequency separation between downlink signal components |
| P_T/N_0 | Total Power to Noise Spectral Density ratio |
| P_{Tone}/N_0 | Tone Power to Noise Spectral Density ratio |
| meteo data | Meteorological Data (as a minimum: pressure, temperature, relative humidity must be considered; slant total electron content might also be provided) |

1.4 STRUCTURE OF THIS DOCUMENT

In addition to this section, this document contains the following sections and annexes:

- Section 2 provides a general overview of Delta-DOR technique.
- Section 3 provides a set of definitions for the interagency Delta-DOR.
- Section 4 describes the Delta-DOR interoperability scenarios.
- Section 5 discusses the interagency Delta-DOR validation process [and related quantitative criteria for performance evaluation](#).
- Section 6 discusses the interagency data exchange products and procedures.
- ~~Section 7 discusses the generation and maintenance of the radio source catalog.~~
- Annex A lists a number of items that should be covered in an interagency Implementing Arrangement (IA) prior to commencing regular Delta-DOR operations.

There are several statements throughout the document that refer to the necessity of such a document; this annex consolidates all the suggested IA items in a single list in the document.

- Annex B discusses security considerations applied to the technologies specified in this Recommended Practice.
- [Annex C provides examples of Support Request.](#)
- Annex D is a list of abbreviations and acronyms applicable to Delta-DOR Operations.
- Annex E contains a list of informative references.

1.5 REFERENCES

The following documents contain provisions which, through reference in this text, constitute provisions of this Recommended Practice. At the time of publication, the editions indicated were valid. All documents are subject to revision, and users of this Recommended Practice are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS documents.

- [1] *Radio Frequency and Modulation Systems—Part 1: Earth Stations and Spacecraft*. Issue 25. Recommendation for Space Data System Standards (Blue Book), CCSDS 401.0-B-25. Washington, D.C.: CCSDS, February 2015.
- [2] *Orbit Data Messages*. Issue 2. Recommendation for Space Data System Standards (Blue Book), CCSDS 502.0-B-2. Washington, D.C.: CCSDS, November 2009.
- [3] *Tracking Data Message*. Issue 1. Recommendation for Space Data System Standards (Blue Book), CCSDS 503.0-B-1. Washington, D.C.: CCSDS, November 2007.
- [4] *Delta-DOR Raw Data Exchange Format*. Issue 1. Recommendation for Space Data System Standards (Blue Book), CCSDS 506.1-B-1. Washington, D.C.: CCSDS, June 2013.
- [5] ~~“Radio Source Catalog.” May 26, 2006. Module 107 in *DSN Telecommunications Link Design Handbook*. DSN No. 810-005, Rev. E. Pasadena California: JPL, <<http://eis.jpl.nasa.gov/deepspace/dsndoes/810-005/>>“DDOR X-Band Radio Sources.” Space Assigned Numbers Authority. http://sanaregistry.org/r/radio_sources/.~~
- [6] [Delta-DOR Quasar Catalogue](#). Issue 0. Proposed Draft Recommendation for Space Data System Practices (Proposed Red Book), CCSDS 506.3-R-0. Washington, D.C.: CCSDS, May 2016.
- [7] [Time Code Formats](#). Issue 4. Recommendation for Space Data System Standards (Blue Book), CCSDS 301.0-B-4. Washington, D.C.: CCSDS, November 2010.

NOTE – Informative references are provided in annex E.

2 OVERVIEW

2.1 GENERAL

This section provides a high-level overview of the Delta-DOR technique, its advantages, and disadvantages.

2.2 THE DELTA-DOR TECHNIQUE

Very Long Baseline Interferometry (VLBI) is a technique that allows determination of angular position for distant radio sources by measuring the geometric time delay between received radio signals at two geographically separated stations. The observed time delay is a function of the known baseline vector joining the two radio antennas and the direction to the radio source.

An application of VLBI is spacecraft navigation in space missions where delay measurements of a spacecraft radio signal are compared against similar delay measurements of angularly nearby quasar radio signals. In the case where the spacecraft measurements are obtained from the phases of tones emitted from the spacecraft, first detected separately at each station, and then differenced, this application of VLBI is known as Delta Differential One-Way Ranging ('Delta-DOR' or ' Δ DOR'). (~~See~~[The observation geometry is illustrated in figure 2-1.](#)) Even though data acquisition and processing are not identical for the spacecraft and quasar, both types of measurements can be interpreted as delay measurements and they have similar information content and similar sensitivity to sources of error (reference [E1]). The data produced in such a measurement session are complementary to Doppler and ranging data.

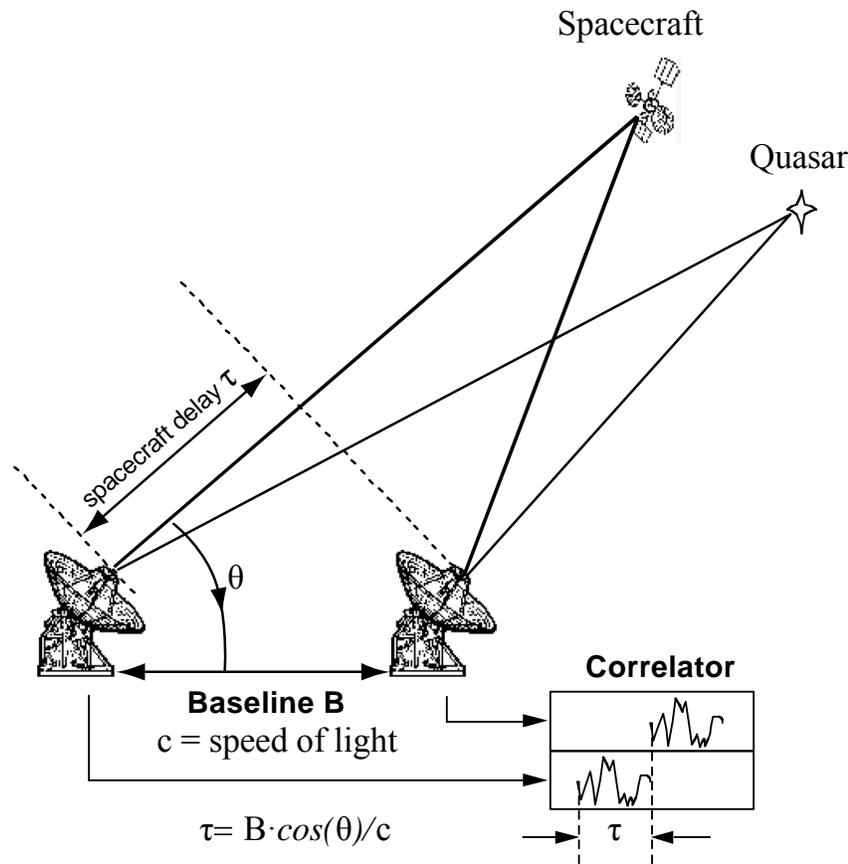


Figure 2-1: Delta-DOR Observation Geometry

To enable a Delta-DOR measurement, a spacecraft must emit several tones or other signal components spanning at least a few MHz. The characteristics of the tones are selected based on the requirements for phase ambiguity resolution, measurement accuracy, efficient use of spacecraft signal power, efficient use of ground tracking resources, and the frequency allocation for space research.

The Delta-DOR technique requires that the ~~same quasar and~~ spacecraft be tracked ~~essentially~~ simultaneously ~~during the same tracking pass,~~ at two distinct radio antennas. A quasar must also be tracked simultaneously just before and/or after the spacecraft observation. Thus a viewing overlap between the two antenna complexes is required; the degree of overlap is dependent upon the relative station locations, and varies for each pair of antenna complexes. Normally, a Delta-DOR pass consists of three or more scans of data recording, each of a few minutes duration. A scan consists of pointing the antennas to one radio source and recording the signal. The antennas must slew to another radio source for the next scan, and so on. The observing sequence is spacecraft-quasar-spacecraft, quasar-spacecraft-quasar, or a longer sequence of alternating observations, depending on the characteristics of the radio sources and the objectives of the measurement session. A minimum of three scans is required to eliminate clock-epoch and clock-rate offsets and then measure spacecraft angular position. Normally a three-scan sequence is repeated several times. Once collected, the received signals are brought to a common site and correlated. A Delta-DOR observable is generated

from a differential one-way range measurement made between the spacecraft and the two ground antennas, and by a measurement of the difference in time of arrival, at the same two stations, of the quasar signal. The observed quantity in a Delta-DOR observation is time delay for each [scan of a](#) radio source.

For a spacecraft, the one-way range is determined for a single station by extracting the phases of two or more signals emitted by the spacecraft. [The signals emitted for this purpose are referred to as DOR tones.](#) The DOR tones are generated by modulating a sine wave or square wave onto the downlink carrier at S-band, X-band, or Ka-band. Either a pure waveform may be used, producing a spectrum of pure tones, or a modulated waveform may be used, producing a spectrum that more closely resembles ~~the spectrum~~[that](#) of a natural radio source. DOR observables are formed by subtracting the one-way range measurements generated at the two stations. While each one-way range measurement is affected by the unknown offset in the spacecraft clock, the station differencing eliminates this effect. However, DOR measurements are still biased by ground station clock offsets and instrumental delays.

For measuring the quasar, each station is configured to acquire data from it in frequency channels centered on the spacecraft tone frequencies. This receiver configuration choice ensures that the spacecraft-quasar differencing [nearly](#) eliminates the effects of ground station clock offsets and instrumental delays. By selecting a quasar that is close in an angular sense to the spacecraft, and by observing the quasar at nearly the same time as the spacecraft, the effects of errors in the modeled station locations, Earth orientation, and transmission media delays are [strongly](#) diminished. [A common radio source catalogue, defined in reference \[5\], needs to be used by all agencies to facilitate consistency in radio source selection, pointing, and correlating.](#)

[To plan for a measurement, the catalogue is searched to find candidate sources that are angularly close to the spacecraft position at the measurement time, and of sufficient flux. Then specific sources are selected for observation based on some criteria such as minimizing measurement error.](#)

In navigation processing, the delay or DOR observable is modeled for each scan of each radio source. The measured observable depends on both geometric factors and on delays introduced by transmission media. Meteo data are provided from each tracking site so that, possibly in conjunction with other data such as GPS measurements, corrections can be computed to account for tropospheric and ionospheric path delays. The modeled or 'computed' observable is based on geometric parameters and available calibrations for tropospheric and ionospheric delays. Residuals are formed by subtracting the computed observables from the measured time delay values. The 'Delta' between spacecraft and quasar observations is generated internal to the navigation processing by subtracting residual values of quasar observations from residual values of spacecraft observations.

Because each Delta-DOR measurement requires the use of two antennas, and navigation accuracy is improved by baseline diversity, this technique is highly conducive to interagency cooperation. Measurements from two baselines are required to determine both components of angular position, with orthogonal baselines providing the best two-dimensional coverage.

~~While no agency has enough station complexes to provide orthogonal baselines by itself, t~~
 The existing assets of more than one agency today could provide two or more pairs of angularly separated baselines and good geometric coverage for missions throughout the ecliptic plane. Stations from different agencies can be used as Delta-DOR data collectors for navigation purposes, assuming that the infrastructure has been laid to facilitate such cooperation. The use of Delta-DOR has been very beneficial for numerous NASA, ESA, and JAXA missions, beginning with Voyager in 1979. ~~Current missions using Delta-DOR for navigation, as of this writing, include Messenger, New Horizons, Dawn, EPOXI, and Hayabusa. The technique is planned for future missions such as Mars Science Laboratory (NASA), BepiColombo (ESA), and Ikaros (JAXA), and it seems reasonably likely that its use will~~Delta-DOR use has become a standard part of many mission navigation plans. CCSDS standardization ~~will help~~has helped expand the use of the technique by allowing interagency cross support.

2.3 ADVANTAGES OF DELTA-DOR

Earth-based radio metric tracking is the primary source of navigational data (Doppler and ranging) during interplanetary cruise. The advantages of using Delta-DOR measurements along with line-of-sight Doppler and ranging data include:

- Delta-DOR provides improved angular accuracy by direct geometric measurement of the plane-of-sky position of a spacecraft in the inertial reference frame defined by the quasars.
- Orbit solutions based on line-of-sight and Delta-DOR data show less sensitivity to systematic errors, as compared to orbit solutions based on only line-of-sight measurements, because of direct observation of all components of state. (See figure 2-2 below from Mars Exploration Rover data, reference [E8].) Targeting plane, commonly referred to as ‘B-Plane’, coordinates are typically used to describe planetary approach trajectories. Uncertainties in the approach trajectory are represented by error ellipses. Better planetary approach trajectories are characterized by smaller error ellipses.
- Solutions which incorporate Delta-DOR do not have singularities at low geocentric declinations or other adverse geometries.
- ~~Comparable trajectory accuracy is obtained using either short arc (few days) or long arc (few months) solutions when Delta-DOR data are used.~~Delta-DOR data can be used to obtain reasonable trajectory accuracy with just a short data arc (few days). Spacecraft state can be recovered more quickly following a maneuver using Delta-DOR. By contrast, trajectory accuracy using Doppler and ranging only typically depends strongly on data arc length.
- Navigation requirements can be satisfied by reduced tracking time per week, thus reducing both the duration and number of weekly tracking passes; e.g., Delta-DOR tracks may be used during an extended mission to meet navigation needs with a sparse tracking schedule.

- Delta-DOR data may be acquired in a listen-only mode; an uplink is not required.

Mars B-plane (Mars Equatorial of Date)

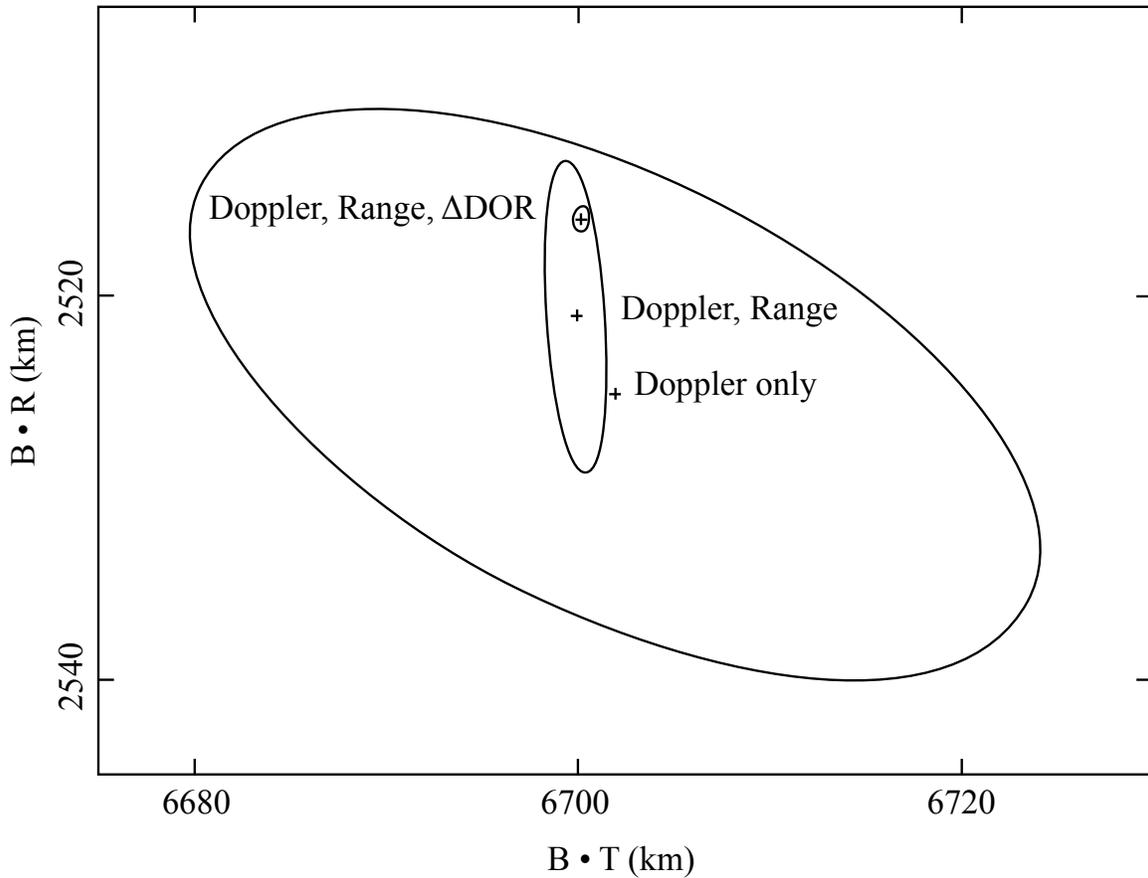


Figure 2-2: Error Ellipses in the Mars Targeting Plane¹

2.4 LIMITATIONS OF DELTA-DOR

There are also some limitations of using Delta-DOR measurements, including:

- Because of the need to coordinate resources at two antenna complexes, and the requirement for view-period overlap, both the scheduling and execution of a Delta-DOR measurement session are more complex than measurement scenarios that involve only a single antenna ~~or single antenna installation~~.
- It is usually not possible to collect telemetry data during the time that the Delta-DOR measurement is in progress.

¹ Courtesy of JPL/Caltech.

3 DEFINITIONS FOR INTERAGENCY DELTA-DOR

3.1 OVERVIEW

Delta-DOR operations requirements address functionality, processes, contents, and implementation approach for interoperability. Two kinds of scenarios are addressed: operational scenarios, in which Delta-DOR is used to support a flying mission, and validation scenarios, in which the validation of Delta-DOR capability is ~~effected~~performed. First, roles of participating agencies in operational scenarios are defined. Then, roles of participating agencies in validation scenarios are also defined.

3.2 ROLES OF PARTICIPATING AGENCIES IN OPERATIONAL SCENARIOS

The following roles of participating agencies in operational scenarios are defined:

- Data Usage Agency (DUA): agency that provides the spacecraft (S/C) predicted trajectory and performs Delta-DOR observable modeling.
- Data Collection Agency (DCA): agency that collects the raw Delta-DOR data (there may be more than one).
- Data Processing Agency (DPA): agency that processes (correlates) the raw Delta-DOR data.

3.3 ROLES OF PARTICIPATING AGENCIES IN VALIDATION SCENARIOS

The following roles of participating agencies in validation scenarios are defined:

- Validating Agency (VA): agency that validates a specific function. Being the agency that validates part of the Delta-DOR system, this agency is supposed to have this system already operational and validated in terms of interoperability with other agencies.
- Under Validation Agency (UVA): agency that undergoes the validation process for a specific part of the Delta-DOR system.

The relationship between VA and UVA may be established at DUA, DCA, or DPA level.

3.4 DEFINITION OF THE OPERATIONAL SCENARIOS

The following table represents the four recognized interagency Delta-DOR operational scenarios. Each scenario is independent from the others. The notation A1=Agency 1, A2=Agency 2, etc., is used.

Table 3-1: Definition of Cross-Support Scenarios

| Scenario | Agency | | |
|----------|--------|------------|----------|
| | DUA | DCA | DPA |
| 1 | A1 | A2 | A2 |
| 2 | A1 | A1 & A2/A3 | A1 or A2 |
| 3 | A1 | A2 & A3 | A1 |
| 4 | A1 | A2 & A3 | A2 or A3 |

NOTE – The scenarios identified in table 3-1 are described in section 4.

3.5 DEFINITION OF THE VALIDATION SCENARIOS

The following table identifies the three recognized interagency Delta-DOR validation steps. The notation adopted in 3.2 is used. Each scenario is independent from the others.

Table 3-2: Definition of Cross-Support Validation Scenarios

| Step | Agency | | | Validates |
|------|--------|-------------|-----|---|
| | DUA | DCA | DPA | |
| 1 | UVA | VA | VA | Trajectory prediction and observable modeling |
| 2 | VA | UVA&VA, UVA | VA | Data collection |
| 3 | VA | VA | UVA | Data processing |

NOTE – The scenarios identified in table 3-2 are described in section 5.

3.6 DEFINITION OF THE INTERFACES

The high-level Delta-DOR data flow below shows various interfaces (numbered 1 through 7 in figure 3-1) where standardization is beneficial in terms of establishing interoperability. Figure 3-1 also contains the roles of operational scenarios as defined in 3.2.

In general, the Recommended Practice covers the necessary parameters at each stage of the data flow. During data acquisition, radio source signals arrive at an antenna that belongs to a Data Collecting Agency, are detected by a receiver (Rx), and then stored at the site. Next, data from at least two sites are transferred to a Data Processing Agency and correlated to generate observables. Finally, reduced data (i.e.g., time delay observables [and clock offset](#)) and meteo data used to calibrate path delays through transmission media are provided to the Orbit Determination (Data User Agency).

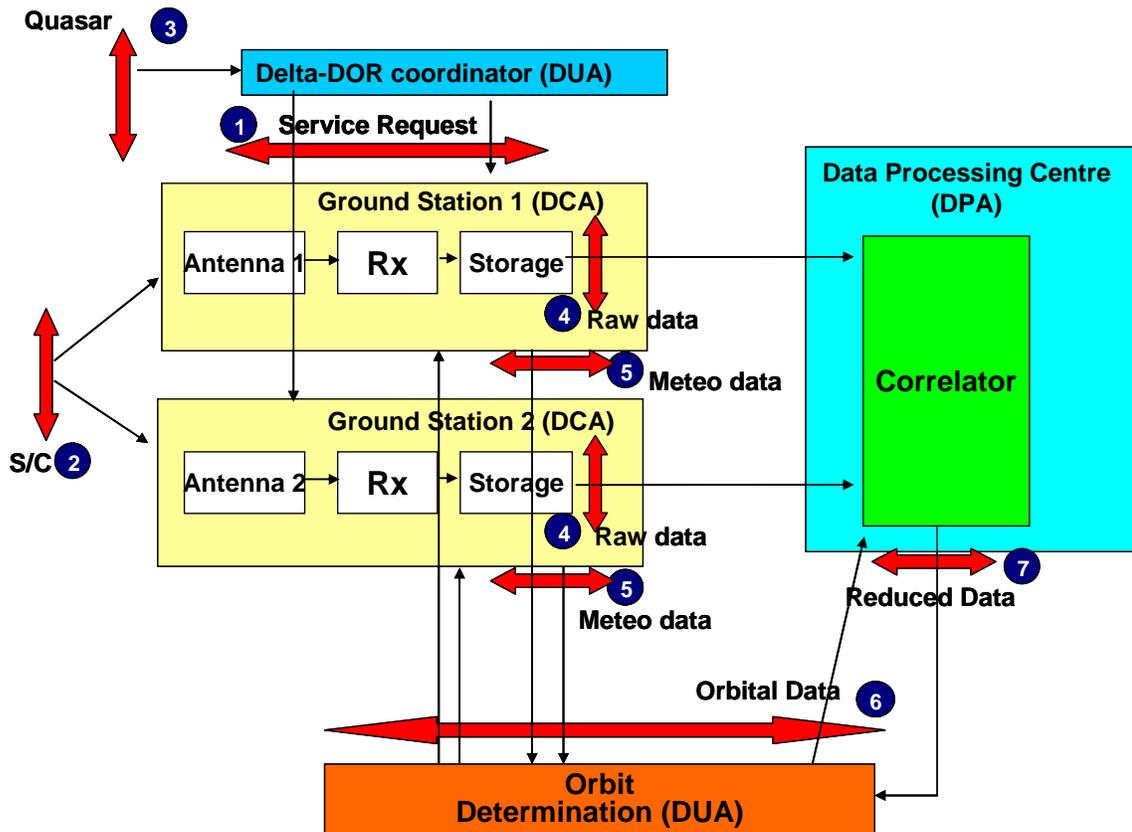


Figure 3-1: High-Level Delta-DOR Flow Interface Definition

With reference to figure 3-1 the following interfaces can be defined:

- IF-1: **ServiceSupport** Request; includes observation schedule and sequence. This interface is described in 6.2.
- IF-2: DOR signal for S/C tracking. This interface is defined in CCSDS 401 (2.5.6B) B-2 (reference [1]).
- IF-3: quasar catalogue for Delta-DOR (reference [5]); provides quasar coordinates and flux that are used for measurement planning. This interface is described in **section 7**reference [6].
- IF-4: exchange format for raw Delta-DOR data. This interface is **being standardized**defined by the **Raw Data Exchange Format (RDEF)** in reference [4] and may differ from the native format used for raw data by an Agency.
- IF-5: meteo data. This interface is defined by the Tracking Data Message (TDM—reference [3]).
- IF-6: orbital data. These data are used at all stations to define antenna pointing during data acquisition and received frequency predictions. These data are also input to the

Delta-DOR correlator. This input relies on the S/C orbit prediction, and therefore information is exchanged among agencies via Orbit Ephemeris Message (OEM) products (reference [2]).

- IF-7: reduced data. These are the products of the Delta-DOR. This interface is defined by the Tracking Data Message (TDM—reference [3]).

3.7 DEFINITION OF PARAMETERS INTERVENING IN THE MEASUREMENT

3.7.1 GENERAL

3.7.1.1 Basic information needed to enable cross support between Agencies shall first be documented in an Implementing Arrangement (IA). The IA shall contain at least the information listed in annex A.

3.7.1.2 In addition to the IA, three sets of parameters provide all information needed to perform a Delta-DOR session. These are:

- a) [ServiceSupport](#) Request parameters (interfaces affected: IF-1, IF-2, and IF-3);
- b) orbit ephemeris parameters (IF-6);
- c) correlation parameters (not mandatory, [used primarily for validation purposes](#)).

3.7.1.3 Such parameters shall be exchanged either via the IA (annex A) or via the [ServiceSupport](#) Request defined in 6.2.

~~NOTE—Each of the above sets of parameters is detailed in the following subsections.~~

3.7.2 [SERVICE SUPPORT](#) REQUEST PARAMETERS

The following parameters further described in 6.2 belong to the [ServiceSupport](#) Request category:

- a) Delta-DOR activity start/stop time;
- b) spacecraft, quasar, ~~and station~~, [mission, configuration, and request](#) IDs;
- c) start [time](#) and ~~stop time~~[duration](#) of each scan;
- d) radio source to observe for each scan;
- e) signal polarization;
- f) receiver channelization including bandwidth and sample resolution;
- g) spacecraft signal components to record;
- h) last estimated [transmitted](#) non-coherent carrier frequency;

- i) frequency of the DOR tones or of the subcarrier harmonics that will be used for the measurement;
- j) expected signal flux/flux density for each radio source.

3.7.3 ORBIT EPHEMERIS PARAMETERS

The following parameters belong to the orbit ephemeris category:

- a) OEM file as defined in reference [2] of sufficient accuracy for antenna pointing during data acquisition;
- b) OEM file as defined in reference [2] of sufficient accuracy for delay ambiguity resolution during data processing;
- c) an estimate of the uncertainty in the OEM.

3.7.4 CORRELATION PARAMETERS

The following parameters belong to the correlation category:

- a) total averaging time for the spacecraft signal;
- b) coherent integration time for the spacecraft signal;
- c) Phase Locked Loop (PLL) bandwidth (in Hz), if used, for each spacecraft tone;
- d) total averaging time for the quasar signal;
- e) coherent integration time for the quasar signal;
- f) [number of lags \(for quasar correlation\)](#).

4 DESCRIPTION OF OPERATIONAL SCENARIOS

4.1 OVERVIEW

4.1.1 In this section, the four interoperability scenarios outlined in section 3 are described, using the following rules:

- each scenario is split in steps, respecting the timeline of events;
- all interfaces and categories of parameters to be exchanged at each step are mentioned.

Moreover, the following conventions are also adopted:

- *data processing* indicates the correlation of raw Delta-DOR data and generation of time delay observables;
- *Delta-DOR observable modeling* indicates reading of reduced Delta-DOR data and meteo data and computation of corresponding model values for the observables, i.e., generation of computed observables for use in orbit determination.

4.1.2 The IA described in annex A is a prerequisite to the execution of interagency Delta-DOR measurements. In particular the IA shall include time periods and number of occurrences for which service may be requested ('tracking schedule'). Instances of the Delta-DOR service, as required, are then requested based on the allowed tracking schedule. The information needed to request an instance of the Delta-DOR service is given in the '[ServiceSupport](#) Request' defined in 6.2.

4.2 SCENARIO 1

4.2.1 GENERAL

4.2.1.1 In scenario 1, following the conventions adopted in 3.2, the DUA is Agency 1, while the DCA and the DPA are Agency 2.

4.2.1.2 The scenario participating entities and tasks are:

- a) tracked probe: DUA;
- b) tracking stations: both stations operated by the DCA;
- c) data processing: performed by the DCA/DPA;
- d) data transfer:
 - OEM file from DUA to DCA,
 - meteo data from DCA to DUA,
 - reduced Delta-DOR data delivery by the DCA/DPA to the DUA;
- e) Delta-DOR observable modeling: performed by the DUA.

4.2.2 OPERATIONAL SUPPORT PROCEDURE

The operational support procedure for scenario 1 shall be as follows:

- a) The DUA provides the [ServiceSupport](#) Request (through IF-1) to the DCA/DPA.
- b) The DUA provides an OEM (through IF-6) to the DCA/DPA to be used for antenna pointing predicts and frequency predicts during data acquisition, and for correlation processing of the S/C [data](#).
- c) The DUA configures the spacecraft for DOR downlink (~~through~~ IF-2) at the scheduled times.
- d) The DCA programs the detailed observation sequence, generates antenna pointing and frequency predicts, and configures the receiver as per the [ServiceSupport](#) Request.
- e) The DCA/DPA executes the observation and transfers both raw and meteo data to its facilities. For this data transfer step, in this scenario, either the native interfaces for the DCA or the interagency interfaces IF-4 and IF-5 may be used.

NOTE – Latitude is given here since data collection and processing are both native to the DCA/DPA.

- f) The DPA correlates the data and provides reduced data (TDM, through IF-7) to the DUA.
- g) The DCA provides the DUA with meteo data collected during the tracking (TDM, through IF-5).
- h) The DUA makes use of the reduced data.

4.2.3 EXERCISED INTERFACES

The interfaces exercised in scenario 1 are:

- a) IF-1: [ServiceSupport](#) Request by the DUA to the DCA/DPA.
- b) IF-2: Delta-DOR tone definition.

NOTE – The [ServiceSupport](#) Request controls use of IF-2.

- c) IF-3: quasar selection provided by the DUA to the DCA.

NOTE – The [ServiceSupport](#) Request controls use of IF-3.

- d) IF-5: meteo data to be provided by the DCA to the DUA.
- e) IF-6: provision of OEM file by the DUA to the DCA/DPA.
- f) IF-7: reduced data in the form of TDM files to be provided by the DPA to the DUA.

4.3 SCENARIO 2

4.3.1 GENERAL

4.3.1.1 In scenario 2, following the conventions adopted in 3.2, the DUA is Agency 1, while DCA 1 is Agency 1, DCA 2 is Agency 2 or Agency 3, and the DPA can be either Agency 1 or Agency 2.

4.3.1.2 The scenario participating entities and tasks are:

- a) tracked probe: DUA;
- b) tracking stations: one station operated by the DUA/DCA 1 and the other by DCA 2;
- c) data processing: performed either by the DUA/DCA 1 or by DCA 2;
- d) data transfer:
 - OEM file from DUA to DCA 2,
 - meteo data from DCA 2 to DUA;
 - in case the DUA is the DPA:
 - exchange format raw Delta-DOR data from DCA 2 to DUA;
 - in case DCA 2 is the DPA:
 - exchange format raw Delta-DOR data from DUA to DCA 2,
 - reduced Delta-DOR data delivery by DCA 2 to the DUA in the form of a TDM file;
- e) Delta-DOR observable modeling: performed by the DUA.

4.3.2 OPERATIONAL SUPPORT PROCEDURE

The operational support procedure for scenario 2 shall be as follows:

- a) The DUA provides the [ServiceSupport](#) Request (through IF-1) to DCA 2.
- b) The DUA provides an OEM (through IF-6) to DCA 2 to be used for antenna pointing predicts and frequency predicts during data acquisition, and, if DCA 2 is the DPA, for correlation processing of the S/C.
- c) The DUA configures the spacecraft for DOR downlink (through IF-2) at the scheduled times.
- d) The DUA/DCA 1 and DCA 2 program the detailed observation sequence, generate antenna pointing and frequency predicts, and configure the receiver as per the [ServiceSupport](#) Request.

- e) The DUA/DCA 1 and DCA 2 perform the observation.
- f) DCA 2 transfers the meteo data collected at its station to the DUA (through IF-5).
- g) If DCA 2 is the DPA:
 - 1) the DUA/DCA 1 transfers the exchange format raw Delta-DOR data collected at its station to DCA 2 (through IF-4);
 - 2) DCA 2 provides reduced Delta-DOR data (TDM, through IF-7) to the DUA.
- h) If the DUA/DCA 1 is the DPA:
 - 1) DCA 2 transfers the exchange format raw Delta-DOR data collected at its station to the DUA (through IF-4).
- i) The DUA makes use of the reduced data.

4.3.3 EXERCISED INTERFACES

The interfaces exercised in scenario 2 are:

- a) IF-1: [ServiceSupport](#) Request by the DUA to DCA 2.
- b) IF-2: Delta-DOR tone definition.

NOTE – The [ServiceSupport](#) Request controls use of IF-2.

- c) IF-3: quasar selection by the DUA.

NOTE – The [ServiceSupport](#) Request controls use of IF-3.

- d) IF-4: in case the DUA is the DPA, provision of exchange format raw Delta-DOR data by DCA 2 to the DUA/DPA; in case DCA 2 is the DPA, provision of exchange format raw Delta-DOR data by the DUA to DCA 2/DPA.
- e) IF-5: meteo data to be provided by DCA 2 to the DUA.
- f) IF-6: provision of OEM file by the DUA to DCA 2.
- g) IF-7: reduced data in the form of TDM files to be provided by DCA 2 to the DUA only if DCA 2 is the DPA.

4.4 SCENARIO 3

4.4.1 GENERAL

4.4.1.1 In scenario 3, following the conventions adopted in 3.2, the DUA is Agency 1, while DCAs are Agency 2 and Agency 3, and the DPA is again Agency 1.

4.4.1.2 The scenario participating entities and tasks are:

- a) tracked probe: DUA;
- b) tracking stations: one station operated by DCA 1 and the other by DCA 2;
- c) data processing: performed by the DUA;
- d) data transfer:
 - OEM file from DUA to DCAs,
 - meteo data from DCAs to DUA,
 - exchange format raw Delta-DOR data from DCAs to DUA;
- e) Delta-DOR observable modeling: performed by the DUA.

4.4.2 OPERATIONAL SUPPORT PROCEDURE

The operational support procedure for scenario 3 shall be as follows:

- a) The DUA provides the [ServiceSupport](#) Request (through IF-1) to both DCAs.
- b) The DUA provides an OEM (through IF-6) to both DCAs to be used for antenna pointing predicts and frequency predicts during data acquisition.
- c) The DUA configures the spacecraft for DOR downlink (through IF-2) at the scheduled times.
- d) DCA 1 and DCA 2 program the detailed observation sequence, generate antenna pointing and frequency predicts, and configure the receiver as per the [ServiceSupport](#) Request.
- e) DCA 1 and DCA 2 perform the observation.
- f) DCA 1 and DCA 2 transfer exchange format raw Delta-DOR data (through IF-4) and meteo data (through IF-5) collected at their stations to the DUA/DPA.
- g) The DUA/DPA performs the correlation and makes use of the reduced data.

4.4.3 EXERCISED INTERFACES

The interfaces exercised in this scenario are:

a) IF-1: [ServiceSupport](#) Request by the DUA to the DCAs. |

b) IF-2: Delta-DOR tone definition. |

NOTE – The [ServiceSupport](#) Request controls use of IF-2. |

c) IF-3: quasar selection by the DUA. |

NOTE – The [ServiceSupport](#) Request controls use of IF-3. |

d) IF-4: provision of exchange format raw Delta-DOR data by the DCAs to the DUA.

e) IF-5: meteo data to be provided by the DCAs to the DUA.

f) IF-6: provision of OEM file by the DUA to the DCAs.

4.5 SCENARIO 4

4.5.1 GENERAL

4.5.1.1 In scenario 4, following the conventions adopted in 3.2, the DUA is Agency 1, while DCAs are Agency 2 and Agency 3, and the DPA is either Agency 2 or Agency 3.

4.5.1.2 The scenario participating entities and tasks are:

- a) tracked probe: DUA;
- b) tracking stations: one station operated by DCA 1 and the other by DCA 2;
- c) data processing: the DPA could be either DCA 1 or DCA 2;
- d) data transfer:
 - OEM file from DUA to DCAs,
 - meteo data from DCAs to DUA;in case DCA 1 is the DPA:
 - exchange format raw Delta-DOR data from DCA 2 to DCA 1/DPA;in case DCA 2 is the DPA:
 - exchange format raw Delta-DOR data from DCA 1 to DCA 2/DPA;
- e) Delta-DOR observable modeling: performed by the DUA.

4.5.2 OPERATIONAL SUPPORT PROCEDURE

The operational support procedure for scenario 4 shall be as follows:

- a) The DUA provides the [ServiceSupport](#) Request (through IF-1) to both DCAs.
- b) The DUA provides an OEM (IF-6) to be used for antenna pointing predicts and frequency predicts during data acquisition to both DCAs.
- c) The DUA configures the spacecraft for DOR downlink (through IF-2) at the scheduled times.
- d) DCA 1 and DCA 2 program the detailed observation sequence, generate antenna pointing and frequency predicts, and configure the receiver as per the [ServiceSupport](#) Request.
- e) DCA 1 and DCA 2 perform the observation.
- f) DCA 1 and DCA 2 transfer meteo data to the DUA (through IF-5).
- g) If DCA 1 is the DPA:
 - 1) DCA 2 transfers the exchange format raw Delta-DOR data collected at its station to DCA 1/DPA (through IF-4);

- 2) DCA 1/DPA correlates the data and provides reduced data (TDM, through IF-7) to the DUA.
- h) If DCA 2 is the DPA:
 - 1) DCA 1 transfers the exchange format raw Delta-DOR data collected at its station to DCA 2/DPA (through IF-4);
 - 2) DCA 2/DPA correlates the data and provides reduced data (TDM, through IF-7) to the DUA.
- i) The DUA makes use of the reduced data.

4.5.3 EXERCISED INTERFACES

The interfaces exercised in scenario 4 are:

- a) IF-1: [ServiceSupport](#) Request by the DUA to the DCAs.
- b) IF-2: Delta-DOR tone definition.

NOTE – The [ServiceSupport](#) Request controls use of IF-2.

- c) IF-3: quasar selection by the DUA.

NOTE – The [ServiceSupport](#) Request controls use of IF-3.

- d) IF-4: in case DCA 1 is the DPA, provision of exchange format raw Delta-DOR data by DCA 2 to DCA 1/DPA; in case DCA 2 is the DPA, provision of exchange format raw Delta-DOR data by DCA 1 to DCA 2/DPA.
- e) IF-5: meteo data to be provided by both DCAs to the DUA.
- f) IF-6: provision of OEM file by the DUA to the DCAs.
- g) IF-7: reduced data in the form of a TDM file to be provided by the DPA to the DUA.

5 DESCRIPTION OF VALIDATION PROCESS

5.1 OVERVIEW

There are several ways for validating the capability of an agency to be incorporated in an existing Delta-DOR network. First of all, the agency joining the Delta-DOR network should already be equipped with the necessary [validated](#) infrastructure. ([reference \[E1\]](#)). However, this cannot be considered as a sufficient step to be fully integrated in an operational network.

Following the description given in 3.5, three validation steps are here described.

Each step aims at validating part of the process (trajectory prediction and Delta-DOR observable modeling, data collection, and data processing) in order to reach complete interoperability. Each of the aforementioned is described in detail in the following subsections.

Each step is an independent case, and the steps can be undertaken in any order. In order to achieve a full interoperability, all of the steps must be successfully completed.

~~The validation process here described covers only the procedure needed; it does not contain a quantitative criterion for the achieved validation level. This information is provided in the Green Book (reference [D2]).~~ [Quantitative criteria for the achieved validation level are covered in 5.5.](#)

In order to make the process more effective, it should be performed using a spacecraft orbiting around a planet. Since the orbit of a planetary spacecraft can be estimated already with high precision using standard radiometric techniques such as integrated Doppler and ranging, the performance of the Delta-DOR system under test can be better characterized.

5.2 INTEROPERABILITY VALIDATION STEP 1—TRAJECTORY PREDICTION AND OBSERVABLE MODELING

5.2.1 GENERAL DESCRIPTION AND GOALS

5.2.1.1 In order to validate the interoperability process, one step is to test the navigation interfaces and related processing. Step 1 exercises all navigation interfaces in the form of OEM (reference [2]) and TDM files (reference [3]), consisting in the exchange of OEM for the pre-acquisition phase and of meteo and reduced data (i.e., the Delta-DOR observable) in the form of TDM files.

5.2.1.2 The Validating Agency (VA), which has already-proven capabilities of Delta-DOR interoperability, will provide both the DCA and DPA roles, from data acquisition to data processing. The Under Validation Agency (UVA) will test its capability to provide a predicted ephemeris (OEM file, IF-6 in figure 3-1) and to carry out Delta-DOR observable modeling using the reduced data (IF-7) and meteo data (IF-5) in TDM format.

5.2.1.3 The participating entities and tasks are:

- a) Tracked probe: UVA.

If the probe belongs to the VA, the VA shall provide the UVA with the means to perform trajectory prediction and Delta-DOR observable modeling on the probe.

NOTE – It would be up to the VA to validate such capability before undertaking the Delta-DOR validation step under discussion.

- b) Tracking stations: both stations operated by the VA.

- c) Data processing: performed only by the VA.

- d) Data transfer:

- Delta-DOR reduced data delivery by the VA to the UVA in the form of a TDM file;
- meteo data delivery by the VA to the UVA in the form of a TDM file;
- OEM file delivery by the UVA to the VA.

- e) Delta-DOR observable modeling: performed by the UVA.

5.2.2 VALIDATION PROCEDURE

The validation procedure shall be as follows:

- a) The UVA provides the [ServiceSupport](#) Request (through IF-1) to the VA.

If the probe belongs to the VA, the VA shall provide the UVA with the relevant S/C parameters (as per annex A) so that the UVA can generate the [ServiceSupport](#) Request.

- b) The UVA provides the VA with an OEM file (through IF-6) of its spacecraft and related uncertainties to be used for antenna pointing during data acquisition, frequency predicts, and correlation processing.

If the probe belongs to the VA, the VA shall provide the UVA with the probe state and relevant S/C model parameters so that the UVA can generate the OEM.

- c) The VA programs the detailed observation sequence, generates antenna pointing and frequency predicts, and configures the receiver as per the [ServiceSupport](#) Request.

- d) The VA executes the observation and transfers both raw and meteo data to its facilities. For this data transfer step, in this scenario, either the native interfaces for the VA or the interagency interfaces IF-4 and IF-5 may be used.

NOTE – Latitude is given here since data collection and processing are both native to the VA.

- e) The VA correlates the data and provides reduced data (TDM, through IF-7) to the UVA.
- f) The VA provides the UVA with meteo data collected during the tracking (TDM, through IF-5).
- g) The UVA performs the Delta-DOR observable modeling.
- h) The VA checks the computed observables provided by the UVA.

5.2.3 VALIDATED INTERFACES

The interfaces validated in this step are:

- a) IF-1: provision of the [ServiceSupport](#) Request by the UVA to the VA.
- b) IF-2: Delta-DOR tone definition.

NOTE – The [ServiceSupport](#) Request controls use of IF-2.

- c) IF-3: quasar selection.

NOTE – The [ServiceSupport](#) Request controls use of IF-3.

- d) IF-5: provision of meteo data of both observing stations by the VA to the UVA.
- e) IF-6: provision of OEM file by the UVA to the VA.
- f) IF-7: provision of reduced Delta-DOR data by the VA to the UVA.

5.2.4 ACHIEVEMENTS

With interoperability validation step 1 the following are achieved:

- a) validation of the UVA navigation products in the pre-acquisition phase (i.e., OEM files).
- b) validation of the UVA capabilities to read and model Delta-DOR navigation products (i.e., TDM files) within the orbit determination phase.
- c) The UVA can now provide the role of DUA.

5.3 INTEROPERABILITY VALIDATION STEP 2—DATA COLLECTION

5.3.1 GENERAL DESCRIPTION AND GOALS

5.3.1.1 Step 2 addresses the point of raw data exchange and validation of the raw data acquisition process by the UVA.

5.3.1.2 The participating entities and tasks are:

- a) Tracked probe: VA.

If the probe belongs to the UVA, the UVA shall provide the VA with the means to perform trajectory prediction and Delta-DOR observable modeling on the probe.

- b) Tracking stations: one station operated by the VA, one by the UVA (or both operated by the UVA).
- c) Data transfer: exchange format raw Delta-DOR and meteo data transfer from the UVA to the VA.
- d) Data processing: performed by the VA.
- e) Delta-DOR observable modeling: performed by the VA.

5.3.2 VALIDATION PROCEDURE

The validation procedure shall be as follows:

- a) The VA provides the [ServiceSupport](#) Request (through IF-1) to the UVA.

If the probe belongs to the UVA, the UVA shall provide the VA with the relevant S/C parameters (as per annex A) so that the VA can generate the [ServiceSupport](#) Request.

- b) The VA provides the UVA with an OEM file (through IF-6) of its spacecraft and related uncertainties to be used for antenna pointing predicts and frequency predicts during data acquisition, and for the correlation process.

If the probe belongs to the UVA, the UVA shall provide the VA with the probe state and relevant S/C model parameters so that the VA can generate the OEM.

- c) The UVA and the VA (or the UVA only, in case both stations belong to the UVA) program the detailed observation sequence, generate antenna pointing and frequency predicts, and configure the receiver as per the [ServiceSupport](#) Request.
- d) The UVA and the VA (or the UVA only, in case both stations belong to the UVA) execute the observation.
- e) The UVA transfers the exchange format raw Delta-DOR data (through IF-4) and the meteo data (through IF-5) collected at its station(s) to the VA.
- f) The VA performs the correlation process.
- g) The VA performs the observable modeling and validates the results.

5.3.3 VALIDATED INTERFACES

The interfaces validated in this step are:

a) IF-1: provision of the [ServiceSupport](#) Request by the VA to the UVA.

b) IF-2: Delta-DOR tone definition.

NOTE – The [ServiceSupport](#) Request controls use of IF-2.

c) IF-3: quasar selection.

NOTE – The [ServiceSupport](#) Request controls use of IF-3.

d) IF-4: provision of exchange format raw Delta-DOR data by the UVA to the VA.

e) IF-5: provision of meteo data by the UVA to the VA.

5.3.4 ACHIEVEMENTS

With interoperability validation step 2 the following are achieved:

a) validation of the UVA capability to make use of the navigation products generated by the VA (i.e., OEM files).

b) validation of exchange format raw Delta-DOR and meteo data acquisition of the UVA.

c) The UVA can now provide the role of DCA.

5.4 INTEROPERABILITY VALIDATION STEP 3—DATA PROCESSING

5.4.1 GENERAL DESCRIPTION AND GOALS

5.4.1.1 Step 3 addresses the correlation process performed by the UVA.

5.4.1.2 The participating entities and tasks are:

a) Tracked probe: VA.

If the probe belongs to the UVA, the UVA shall provide the VA with the means to perform trajectory prediction and Delta-DOR observable modeling on the probe.

b) Tracking stations: both operated by the VA.

c) First data transfer: exchange format raw Delta-DOR data from the VA to the UVA.

d) Data processing: data correlation performed by the UVA.

e) Second data transfer: reduced Delta-DOR data transfer from the UVA to the VA.

5.4.2 VALIDATION PROCEDURE

The validation procedure shall be as follows:

- a) The VA provides the [ServiceSupport](#) Request (through IF-1) to the UVA.
 If the probe belongs to the UVA, the UVA shall provide the VA with the relevant S/C parameters (as per annex A) so that the VA can generate the [ServiceSupport](#) Request.
- b) The VA provides the UVA with an OEM file (through IF-6) of its spacecraft and related uncertainties to be used in the correlation process.
 If the probe belongs to the UVA, the UVA shall provide the VA with the probe state and relevant S/C model parameters so that the VA can generate the OEM.
- c) The VA programs the detailed observation sequence, generates antenna pointing and frequency predicts, and configures the receiver as per the [ServiceSupport](#) Request.
- d) The VA executes the observation.
- e) The VA transfers exchange format raw Delta-DOR data (through IF-4) collected at its tracking stations to the UVA.
- f) The UVA performs the data processing. Discussion on the correlation parameters in 3.7.4 may be required as part of the validation process. The VA also performs data processing to be able to check the results from the UVA.
- g) The UVA transfers the reduced Delta-DOR data to the VA (through IF-7).
- h) The VA compares the reduced data to its own values, from data processing performed at the VA, and validates the results.

5.4.3 VALIDATED INTERFACES

The interfaces validated in this step are:

- a) IF-1: provision of the [ServiceSupport](#) Request by the VA to the UVA.
- b) IF-2: Delta-DOR tone definition.
 NOTE – The [ServiceSupport](#) Request controls use of IF-2.
- c) IF-3: quasar selection.
 NOTE – The [ServiceSupport](#) Request controls use of IF-3.
- d) IF-4: provision of exchange format raw Delta-DOR data by the VA to the UVA.
- e) IF-6: provision of OEM file by the VA to the UVA.
- f) IF-7: provision of reduced Delta-DOR data by the UVA to the VA.

5.4.4 ACHIEVEMENTS

With interoperability validation step 3 the following are achieved:

- a) validation of the UVA capability to make use of the navigation products (i.e., OEM files) generated by the VA in the data processing.
- b) validation of data correlation capability of the UVA.
- c) The UVA can now provide the role of DPA.

5.5 QUANTITATIVE VALIDATION CRITERIA

5.5.1 OVERVIEW

This subsection addresses some quantitative criteria to be adopted in the validation process.

The only cases treated here will be the raw Delta-DOR data collection and the Delta-DOR data processing, since the data usage normally pertains to orbit determination and is outside the scope of the present book.

Both data collection and data processing functions can be validated only by performing the data processing. This step can be performed either by the VA (with or without the participation of the UVA) in case of the validation of the data collection capability and shall be performed by both VA and UVA in case of data processing validation.

5.5.2 QUANTITATIVE VALIDATION FOR DATA COLLECTION

5.5.2.1 A goal is first set for the level of accuracy to which validation will be done. Agencies agree on plan and schedule to record data for purpose of validation. It must be planned to acquire data for which the ‘truth’ of the data can be independently established to a level that is better than the validation accuracy goal. Observations must also be planned so that random errors will be less than the accuracy goal. The estimation of such random errors contributors are described in [E1]. The validation set up should act on the parameters that control the magnitude of the random errors, also described in [E1].

5.5.2.2 Typical methods to establish ‘truth’ of recorded data include

- a) Record on two similar baselines, the first of which is already validated. Compare results between baselines to validate the second baseline.
- b) Observe a spacecraft such as an orbiter at Mars (or other planets) that has a very well known a priori ephemeris (e.g., current Mars orbiters can have positions known to sub-nanoradian accuracy, hence could be used to validate a Delta-DOR data collection or processing to the nanoradian level). Inspect Delta-DOR measurement residuals to validate the new data collection asset.

5.5.2.3 When two similar baselines are compared, the time delay observables cannot be directly compared. Residuals formed by subtracting a model from the observables for each baseline must be used instead. If the two baselines are very nearly the same (e.g. nearby antennas at one end of baseline and a common antenna at the other end of the baseline) then a low fidelity model will suffice. But if the baselines have significant difference (e.g. orientation, length) then a high fidelity model including media calibration (e.g. from Flight Dynamics) must be used. Also, validation to the highest level of accuracy (i.e. few nanoradians) will always require high fidelity models.

5.5.2.4 When data for two similar baselines are compared, one or more Delta-DOR points are formed for each data set. Residuals are formed for Delta-DOR points from known baseline 1 (R11, R12, R13, ...) and for the to be validated baseline 2 (R21, R22, R23, ...). The comparison measure C is:

$$C = \text{sqrt} \{ [(R21-R11)^2 + (R22-R12)^2 + (R23-R13)^2 + \dots] / N \}$$

where N is the number of Delta-DOR points

Such measure shall finally be compared with the accuracy goal set up before the validation exercise.

5.5.2.5 When data for a single new baseline is being validated, Delta-DOR residuals must be calculated using a well known spacecraft ephemeris and high fidelity models including media calibration. Denote the residuals as R1, R2, R3, ..., then the comparison measure is simply

$$C = \text{sqrt} \{ [(R1)^2 + (R2)^2 + (R3)^2 + \dots] / N \}$$

where N is the number of Delta-DOR points

Such measure shall finally be compared with the accuracy goal set up before the validation exercise.

5.5.2.6 At least several successful passes (with multiple Delta-DOR points each) are expected so that comparison statistics can be acquired to establish accuracy of the new data collection asset.

5.5.3 QUANTITATIVE VALIDATION FOR DATA PROCESSING

5.5.3.1 Again, a goal is set for the level of accuracy to which validation will be done. A single common data set is provided to two correlator facilities, the first of which is already validated. The random errors for the data set must be lower than the validation accuracy goal (methodologies to estimate random errors and parameters that control their magnitude are described in [E1]). The correlator outputs are compared to validate the second correlator facility.

5.5.3.2 If each data processing software can output time delay observables at agreed common time epochs, then these observables may be compared directly. The measure of comparison would be the root-mean-square of the observable differences. A bias B , may be expected and is not an issue since it would completely cancel in the later spacecraft minus quasar differencing. Such bias may be calculated by averaging the differences between observables. Say the delays at times t_1, t_2, t_3, \dots are given by $d_{11}, d_{12}, d_{13}, \dots$ at correlator 1, and the delays are given by $d_{21}, d_{22}, d_{23}, \dots$ at correlator 2.

The bias B is calculated as

$$B = [(d_{21}-d_{11}) + (d_{22}-d_{12}) + (d_{23}-d_{13}) + \dots] / N$$

where N is the number of time delays (scans) being compared.

The comparison measure C would be

$$C = \text{sqrt} \{ [(d_{21}-d_{11}-B)^2 + (d_{22}-d_{12}-B)^2 + (d_{23}-d_{13}-B)^2 + \dots] / N \}$$

where N is the number of time delays (scans) being compared.

NOTE – For this case the comparison is of delay observables for individual radio source scans, and not for Delta-DOR.

Such measure shall finally be compared with the accuracy goal set up before the validation exercise.

5.5.3.3 If each data processing software cannot output time delay observables at agreed common time epochs, then these observables cannot be compared directly. Observables are obtained for each correlator at time epochs that agree as close as possible. A high-fidelity model is then subtracted from each observable. The delay residuals can be now compared as above in place of the total delays. The measure of comparison would be the root-mean-square of the residual observable differences.

Such measure shall finally be compared with the accuracy goal set up before the validation exercise.

6 INTERAGENCY DATA EXCHANGE PRODUCTS AND PROCEDURES

6.1 GENERAL

6.1.1 In order to support Delta-DOR interoperability, it is necessary to transfer ~~the following~~ data products between agencies. Specifications for those data products are:

- ~~a) service request;~~
- ~~b) exchange format raw Delta-DOR data (if any);~~
- ~~c) meteo data (TDM);~~
- ~~d) orbit ephemeris files (OEM);~~
- ~~e) reduced Delta-DOR data (TDM).~~
- a) Delta-DOR support request exchange specifications, described in 6.2;
- b) orbit ephemeris files (OEM) exchange specifications, described in 6.3;
- c) raw Delta-DOR data (RDEF) transfer/exchange specifications (if any), described in 6.4;
- d) meteo data (TDM) exchange specifications, described in 6.5;
- e) reduced Delta-DOR data (TDM) transfer/exchange specifications, described in 6.6.

6.1.2 Each participating agency shall agree upon a data transfer strategy for the data products defined in 6.1.1. The strategy shall include the definition of suitable transfer protocols, source machines, and repository machines.

6.2 ~~SERVICE~~DELTA-DOR SUPPORT REQUEST MESSAGE EXCHANGE SPECIFICATIONS

6.2.1 GENERAL

~~6.2.1.1 The Delta-DOR Service Request contains all parameters needed to define a Delta-DOR measurement session. These include all the parameters discussed in 3.7.2. If all parameters are specified, then the Service Request completely defines the Delta-DOR session. Some of the parameters of the Service Request are optional. Some optional parameters may have default values that are provided in the IA. Or, if all stations are part of the same agency, then some or all of the optional parameters may have agency-specific default values. Default values, maintained in tables by each DCA, shall be used to fill in omitted parameters.~~

6.2.1.1 The Delta-DOR support request is limited to the description the data format and the parameters needed to define a Delta-DOR measurement session. These include all parameters in 3.7.2.

6.2.1.2 All parameters in the Support Request are intended to be mandatory and the Support Request completely defines the Delta-DOR session.

6.2.1.3 The Support Request can only specify existing capabilities within a network (reference [E1] provides description of current capabilities for NASA/JAXA and ESA Delta-DOR systems).

6.2.1.4 The Support Request shall be made available to the Agency(/ies) performing the measurement with sufficient lead time (defined in the IA; see annex A) in order to properly plan and configure for the measurement.

6.2.1.5 The mechanism for Support Request exchange is defined in the IA (see annex A).

6.2.2 ~~SERVICE REQUEST DATA EXCHANGE~~ SUPPORT REQUEST
PARAMETER DEFINITION

The parameters in the ~~Service~~Support Request are defined in table 6-1. All times are UTC Earth receive time.

Table 6-1: Definition of Delta-DOR ~~Service~~Support Request Parameters

| Parameter | Units | Required | Description |
|-----------------------------|----------------------------------|-----------------|--|
| Request_ID | YYYY- DDThh:mm:ss | Y | Issue date of the service request |
| Mission_ID | N/A | Y | Name of mission requesting the service |
| Config_ID | N/A | N | Receiver configuration to be used |
| DPA | N/A | N | Agency to perform the data processing |
| SC_Name_List | N/A | Y | An array containing the ID of each spacecraft to be observed |
| SC_Flux | dBm/m² | N | An array containing the flux (total received power per unit area) of each spacecraft to be observed; flux is normalized to a transmission distance of 1 AU; entries correspond to entries in SC_Name_List |
| Quasar_Name_List | N/A | Y | An array containing the ID of each quasar to be observed |

| Parameter | Units | Required | Description |
|------------------|--|-----------------|--|
| Quasar_Flux | Jy | N | An array containing the flux density (received power per unit area per unit bandwidth) of each quasar to be observed; entries correspond to entries in Quasar_Name_List |
| Quasar_RA | deg | N | An array containing the right ascension of each quasar, J2000 coordinates; entries correspond to entries in Quasar_Name_List |
| Quasar_DEC | deg | N | An array containing the declination of each quasar, J2000 coordinates; entries correspond to entries in Quasar_Name_List |
| Tracking_Station | N/A | Y | An array containing the ID of each participating tracking station |
| Network | N/A | N | An array containing the name of the network that each tracking station belongs to; entries correspond to entries in Tracking_Station |
| Track_Time | YYYY- DDDThh:mm:ss_ To_YYYY- DDDThh:mm:ss | Y | An array containing the start and end times for observing at each tracking station; entries correspond to entries in Tracking_Station |
| Scan_Source | N/A | Y | A time ordered list of the radio source to observe for each scan; Note—the sources in this list must be chosen from the sources in either SC_Name_List or Quasar_Name_List |
| Scan_Start | DDDThh:mm:ss | Y | An array containing scan start times; entries correspond to entries in Scan_Source |
| Scan_Stop | DDDThh:mm:ss | Y | An array containing scan stop times; entries correspond to entries in Scan_Source |

| Parameter | Units | Required | Description |
|----------------------------------|--|-----------------|--|
| DOR_Tones_On | YYYY- DDDThh:mm:ss_ To_YYYY- DDDThh:mm:ss | Y | An array containing time intervals for each spacecraft to specify when DOR tones are received at ground stations; Note: each spacecraft must be commanded to transmit DOR tones for an interval that is a one-way light time earlier; entries correspond to entries in SC_Name_List |
| Polarization | N/A | N | An array containing the received signal polarization (RCP or LCP) for each spacecraft; entries correspond to entries in SC_Name_List |
| Carrier_Transmit_Freq | Hz | N | An array containing the carrier transmitter frequency for each spacecraft; entries correspond to entries in SC_Name_List |
| SC_Chan_BW | Hz | Y | Channel bandwidth to be used for spacecraft signal recording |
| SC_Chan_Res | bits/sample | Y | Sample resolution to be used for spacecraft signal recording |
| QU_Chan_BW | Hz | Y | Channel bandwidth to be used for quasar signal recording |
| QU_Chan_Res | bits/sample | Y | Sample resolution to be used for quasar signal recording |
| Channel_Number | N/A | Y | An array containing logical channel numbers to use for recording |
| Spacecraft_Assoc | N/A | N | An array containing spacecraft IDs to associate with each recording channel; entries correspond to entries in Channel_Number |
| Signal_Component | N/A | N | An array containing spacecraft signal component names (CARRIER or SUBCAR or DORTONE); entries correspond to entries in Channel_Number |
| Delta_Flux | dB | N | An array containing spacecraft signal component fluxes relative to total spacecraft signal flux; entries correspond to entries in Channel_Number |

| Parameter | Units | Required | Description |
|----------------------------|---|----------------------------------|--|
| Delta_Frequency | Hz | Y | An array containing spacecraft signal component transmitted frequency offsets from carrier; entries correspond to entries in Channel_Number |
| <u>Item Name</u> | <u>Item Description</u> | <u>Format</u> | <u>Units/Precision/Range</u> |
| <u>RequestId</u> | <u>Issue date (ID) of the Support Request</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s. Time format as per reference [7], ASCII time code B</u> |
| <u>FormatVersion</u> | <u>File format version.</u> | <u>Integer</u> | <u>Positive integer Current version is 1.</u> |
| <u>MissionId</u> | <u>Name of mission requesting the service</u> | <u>4 ASCII characters</u> | <u>As specified in IA</u> |
| <u>ConfigId</u> | <u>Receiver configuration (ID) to be used</u> | <u>Up to 16 ASCII characters</u> | <u>As specified in IA</u> |
| <u>ScId</u> | <u>Spacecraft ID, as used in Scan Table and Channel Table</u> | <u>4 ASCII characters</u> | <u>SC01, SC02,</u> |
| <u>ScName</u> | <u>Spacecraft name</u> | <u>4 ASCII characters</u> | <u>As specified in IA</u> |
| <u>ScFlux</u> | <u>Spacecraft flux, normalized to 1 AU distance</u> | <u>Decimal notation</u> | <u>dBm/m²</u> |
| <u>Pol</u> | <u>Spacecraft received signal polarization</u> | <u>3 ASCII characters</u> | <u>For example, RCP or LCP</u> |
| <u>Carrier</u> | <u>Spacecraft carrier transmitter frequency</u> | <u>Decimal notation</u> | <u>Radio Frequency, Hz</u> |
| <u>DorOn</u> | <u>Start time for reception of spacecraft DOR tones</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s; Time format as per reference [7], ASCII time code B</u> |

| <u>Item Name</u> | <u>Item Description</u> | <u>Format</u> | <u>Units/Precision/Range</u> |
|--|---|----------------------------------|---|
| <u>DorOff</u> | <u>End time for reception of spacecraft DOR tones</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s Time format as per reference [7], ASCII time code B</u> |
| <u>QuId</u> | <u>Quasar ID, as used in Scan Table</u> | <u>4 ASCII characters</u> | <u>QU01, QU02, ...</u> |
| <u>QuName</u> | <u>Quasar name</u> | <u>Up to 12 ASCII characters</u> | <u>As given in quasar catalog, with embedded space replaced by underscore</u> |
| <u>QuFlux</u> | <u>Flux density of quasar</u> | <u>Decimal notation</u> | <u>Jy</u> |
| <u>TrkStn</u> | <u>Station ID</u> | <u>4 ASCII characters</u> | <u>As specified in IA</u> |
| <u>Network</u> | <u>Network that the tracking station belongs to</u> | <u>Up to 6 ASCII characters</u> | <u>As specified in IA</u> |
| <u>TrackStart</u> | <u>Start time for tracking station</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s Time format as per reference [7], ASCII time code B</u> |
| <u>TrackEnd</u> | <u>End time for tracking station</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s Time format as per reference [7], ASCII time code B</u> |
| <u>DdorEpoch</u> | <u>Begin time for DDOR recording activity</u> | <u>YYYY-DDD THH:MM:SS</u> | <u>UTC year, day of the year, hour/minute/second, precision=1 s Time format as per reference [7], ASCII time code B</u> |
| <u>The following four items are referred to as the Scan Table</u> | | | |
| <u>ScanNum</u> | <u>Scan number</u> | <u>Integer</u> | <u>Positive integer, consecutive starting with 1</u> |

| <u>Item Name</u> | <u>Item Description</u> | <u>Format</u> | <u>Units/Precision/Range</u> |
|--|---|---|--|
| <u>ScanSource</u> | <u>Source ID</u> | <u>4 ASCII characters</u> | <u>From either QuId list or ScId list</u> |
| <u>ScanStart</u> | <u>Scan start time</u> | <u>HH:MM:SS</u> | <u>hour/minute/second, time past DDOR Epoch</u> |
| <u>Duration</u> | <u>Scan duration</u> | <u>HH:MM:SS</u> | <u>hour/minute/second</u> |
| <u>ScSampleRate</u> | <u>Spacecraft recording channel sampling rate</u> | <u>Integer</u> | <u>Hz</u> |
| <u>ScSampleSize</u> | <u>Spacecraft recording channel number of bits per sample</u> | <u>Integer</u> | <u>bits/sample</u> |
| <u>QuSampleRate</u> | <u>Quasar recording channel sampling rate</u> | <u>Integer</u> | <u>Hz</u> |
| <u>QuSampleSize</u> | <u>Quasar recording channel number of bits per sample</u> | <u>Integer</u> | <u>bits/sample</u> |
| <u>The following eight items are referred to as the Channel Table</u> | | | |
| <u>ChanNum</u> | <u>Logical recording channel number</u> | <u>Integer</u> | <u>Positive integer, consecutive starting with 1</u> |
| <u>ScAssoc</u> | <u>Spacecraft to associate with recording channel</u> | <u>4 ASCII characters</u> | <u>From ScId list</u> |
| <u>SigComp</u> | <u>Spacecraft signal component</u> | <u>Up to 7 ASCII characters</u> | <u>CARRIER or SUBCAR or DORTONE</u> |
| <u>DeltaFlux</u> | <u>Spacecraft signal component flux</u> | <u>Decimal notation</u> | <u>dB, relative to ScFlux</u> |
| <u>CohFlg</u> | <u>Coherency flag</u> | <u>1 ASCII character</u> | <u>T if signal component is a submultiple of the carrier (i.e. DOR Tone); F if signal component is an independent subcarrier</u> |
| <u>DorMult</u> | <u>DOR tone multiplier; Only used if CohFlg is 'T'</u> | <u>Either ratio of two integers or decimal notation</u> | <u>e.g. 1/440 or 0.00056</u> |
| <u>Subcar</u> | <u>Subcarrier frequency; Only used if CohFlg is 'F'</u> | <u>Decimal notation</u> | <u>Hz</u> |

| <u>Item Name</u> | <u>Item Description</u> | <u>Format</u> | <u>Units/Precision/Range</u> |
|------------------|--|----------------|---|
| <u>Harm</u> | <u>Harmonic number for either DOR tone or subcarrier; Used in both cases in which CohFlg is either 'T' or 'F'.</u> | <u>Integer</u> | <u>Positive or negative integer; =0 for Carrier</u> |

6.2.3 SUPPORT REQUEST SYNTAX

6.2.3.1 A Support Request may provide inputs for a single Delta-DOR session or for several Delta-DOR sessions over a time span.

6.2.3.2 The first three items in table 6-1 appear once only at the start of the Support Request. The remaining items are repeated for each Delta-DOR session.

6.2.3.3 The special lines \$START and \$END appear at the beginning and end of the items for each session. The special line \$EOF appears at the very end. (See annex C for examples.)

6.2.3.4 The Support Request consists of lines of the form

Parameter = Value ;

Several parameters may be presented in tabular form using

Parameter1 Parameter2 ParameterN =

Value1 Value2 ... ValueN

;

6.2.4 SUPPORT REQUEST FILE NAMING CONVENTIONS

The Support Request is provided in text format. The naming convention to be followed is:

MMMM_DDOR_YYYY1_DDD1_YYYY2_DDD2_vN.sr

where

MMMM = 4-character Mission ID

YYYY1 = 4-digit year for initial time of first session

DDD1 = 3-digit day of year for initial time of first session

YYYY2 = 4-digit year for final time of last session

DDD2 = 3-digit day of year for final time of last session

N = version for this issue of the Support Request (e.g. 1 or 2 or 3 or ...)

The suffix .sr identifies the file as Support Request.

6.3 ORBITAL EPHEMERIS MESSAGEFILES EXCHANGE SPECIFICATIONS

6.3.1 GENERAL

The orbital ephemeris data of the spacecraft to be tracked (IF-6) are used for antenna pointing predicts and frequency predicts during data acquisition, prior to data correlation. Therefore they shall be transferred from the DUA to the DCA(s) (see definitions in 3.2) prior to the execution of the planned Delta-DOR observation.

6.3.2 ORBITAL EPHEMERIS DATA EXCHANGE

The orbital information shall be transferred by means of OEM files, defined in reference [2].

6.3.3 DATA TRANSFER REQUIREMENTS

OEM files shall be delivered by the DUA to the DCA on a regular basis, to be agreed upon by the two agencies in the frame of the Implementing Arrangement.

6.4 RAW DELTA-DOR DATA TRANSFER/EXCHANGE SPECIFICATIONS

6.4.1 GENERAL

Raw Delta-DOR and meteo data exchanges are shown as 'IF-4' and 'IF-5' in figure 3-1. There is no CCSDS Recommended Standard for native Delta-DOR data format, since each agency has developed its own hardware and software for data collection. For an interagency Delta-DOR session, a raw Delta-DOR data exchange format is defined (reference [4]) and shall be used when performing cross-agency operations. In such cases, each agency shall therefore translate its data to the exchange format before transferring data to the processing site.

NOTE – The processing site may be located at another agency.

6.4.2 RAW DELTA-DOR DATA EXCHANGE

In case ground stations of two agencies are used in a Delta-DOR recording session, transfer of the exchange format raw data from both sites to the chosen correlator facility is necessary. In case different hardware is used by two agencies, the sampling format for native raw data may not be identical. However, if similar channel positions and sampling rates are agreed upon and used, then it is possible to re-sample one data stream to make it fully compatible with the second stream. Further, data with compatible samples may be converted from the format used by one DCA into the format required by the DPA. The re-sampling and re-

formatting shall be done by the DCA before raw data transfer. Users should be aware that re-sampling may reduce effective signal-to-noise ratio of the data.

The exchange format raw Delta-DOR data file (or files) shall contain ancillary information to completely describe the recording session, as well as the primitive samples of the spacecraft and quasar signals.

NOTE – The exchange format for raw Delta-DOR data is described in reference [4].

6.4.3 DATA TRANSFER REQUIREMENTS

Raw Delta-DOR data exchange of necessity involves transfer of a large volume of data. Historically, VLBI experimenters have exchanged data by shipping tapes or disks from one site to another. On the other hand, measurement systems developed for Delta-DOR have relied on electronic file transfer. Data network connections are needed from each station to the correlator facility. Because of the large data volume expected, the number of transfer steps should be kept to a minimum. The necessary transfer rate that must be provided will depend on the data volume and the allowed latency for delivery of the reduced data.

As an example, 12 Gbytes of data may be transferred in 9 hr at a rate of 3 Mbits/sec. This typical data volume and latency can be supported by two T1 lines for a single transfer step.

The data volume and the required latency must be taken into account when sizing bandwidth requirements. Network connections, network bandwidth, suitable transfer protocols, source machines, and repository machines must all be provided and agreed upon.

6.5 METEO DATA EXCHANGE SPECIFICATIONS

6.5.1 GENERAL

The meteo data collected at the stations during the Delta-DOR tracking (IF-5) are used to develop path delay calibrations for signal transmissions through the Earth's troposphere and ionosphere. These calibrations are then used in the navigation system as part of the observable model. Therefore they shall be exchanged immediately after the execution of the planned Delta-DOR observation.

6.5.2 METEO DATA EXCHANGE

The meteo data information shall be exchanged by means of Tracking Data Message (TDM) files, described in reference [3].

6.5.3 DATA TRANSFER REQUIREMENTS

TDM files shall be delivered by the DCAs (see definitions in 3.2) to the DUA after each Delta-DOR tracking session.

6.6 REDUCED DELTA-DOR DATA TRANSFER/EXCHANGE SPECIFICATIONS

6.6.1 GENERAL

Reduced Delta-DOR data transfer is shown as IF-7 in figure 3-1. Once the raw data have been collected, transferred, and correlated, the Delta-DOR observables shall be delivered to the spacecraft navigation team for use in the process of orbit determination.

6.6.2 REDUCED DELTA-DOR DATA EXCHANGE

The reduced Delta-DOR data information shall be transferred by means of TDM files, defined in reference [3].

The means and latency of data transfer shall be agreed upon by the specific exchange participants and documented in the Implementing Arrangement.

~~7 RADIO SOURCE CATALOGUE SPECIFICATION~~

~~Natural radio source (quasar) input is shown as IF-3 in figure 3-1. A common radio source catalogue shall be used by all agencies to facilitate consistency in radio source selection, pointing, and correlating.~~

~~To plan for a measurement, the catalogue is searched to find candidate sources that are angularly close to the spacecraft position at the measurement time, and of sufficient flux. Then specific sources are selected for observation based on some criteria such as minimizing measurement error.~~

~~The catalogue shall:~~

- ~~— have a unique name for each radio source;~~
- ~~— have coordinates and coordinate uncertainties for each radio source;~~
- ~~— have an estimate of flux and structure (i.e., coordinate variability) for each radio source.~~

~~The JPL radio source catalogue published in DSN document 810-005 (reference [5]) is currently recommended to be used as the standard Delta-DOR catalogue for S- and X-band observations. This catalogue meets the minimum requirements and is updated as new survey work is completed. It should be noted that up-to-date flux estimates and structure estimates are not available for all radio sources.~~

~~The CCSDS Delta-DOR Working Group may periodically review the available published radio source catalogues and issue a new recommendation for which catalogue shall be used as the standard.~~

~~The CCSDS Delta-DOR Working Group encourages all space agencies to support the extension of the existing catalogue as follows:~~

- ~~— increase the number of observed and catalogued of X-band sources;~~
- ~~— develop a Ka-band catalogue;~~
- ~~— provide separate correlated source flux estimates for each interagency baseline;~~
- ~~— provide information on flux variation versus time.~~

ANNEX A

ITEMS FOR AN IMPLEMENTING ARRANGEMENT (IA)

(NORMATIVE)

In several places in this document there are references to items which should be specified in an Implementing Arrangement (IA) between agencies participating in a Delta-DOR campaign, if they are applicable to the particular operation. This annex compiles those items into a single location. The IA should be jointly produced by both agencies participating in a cross-support activity involving the collection, analysis, and transfer of tracking data.

It might be feasible for participating agencies to have a generic baseline IA (‘standard service provider IA’) that specifies mission-/spacecraft-independent entities on the interface, e.g., those associated with the agency’s ground antennas (axis offsets, station locations, side motions, reference frame, epoch, supported frequency bands, etc.). Then smaller IAs could be used for the mission-/spacecraft-specific arrangements.

The following table lists the items that shall be covered in an IA (or equivalent document), along with where they are discussed in the text.

| Item | Section |
|--|---------------------------|
| 1. Identification of roles of participating agencies | 3 |
| 2. ID for mission and spacecraft(s) to be supported | 3, 6.2 |
| 3. Parameters to allow modeling of spacecraft observables; only needed if a second Agency will be using data <u>(i.e., validating orbit determination)</u> for a spacecraft belonging to another Agency | 5 |
| 4. Agreed schedule including number of passes, baseline or station IDs, network ID, dates and times (see NOTE) | 3, 6.2 |
| 5. Functional characteristics of tracking stations, including passbands, locations, and G/T <u>Expected Quasar ID(s) to be used during the tracking campaign for preparation purposes (the list in the IA should be a preliminary list and can be updated prior/during the cross-support campaign itself)</u> | N/A |
| 6. Identification of operational scenarios for each pass | 3 |
| 6. Service <u>Support</u> Request delivery lead time requirement | N/A <u>6.2</u> |
| 7. Delivery time for reduced <u>and/or raw</u> Delta-DOR data (required data delivery time for each phase of the mission) | 6.6 |
| 8. Identification of Delta-DOR official <u>coordinator (i.e., contact point for measurement execution)</u> for each agency | N/A |
| 9. Spacecraft downlink signal structure, polarization, and nominal transmit frequency <u>for advance planning and station configuration definition</u> | 6.2 |

| Item | Section |
|---|--|
| 10. Specific modulation format, DOR tone frequencies, and power levels selected for each spacecraft for advance planning and station configuration definition | 6.2 |
| 11. Ground station configuration ID to be used; only needed if Agencies agree on standard configurations | |
| 12. Expected Delta-DOR observable accuracy (i.e., a-priori random error) | N/A reference [E1] |
| 13. Transfer protocols and data repositories needed for each data type transfer | 6 |
| 14. Specific information, security, interoperability provisions that may apply between agencies involved in the Delta-DOR campaign | 6, annex B |
| NOTE – The schedule may be initially defined as a profile of resource usage and then become more detailed and specific. | |

ANNEX B

SECURITY

(INFORMATIVE)

B1 INTRODUCTION

This section presents the results of an analysis of security considerations applied to the technologies specified in this Recommended Practice.

B2 SECURITY CONCERNS WITH RESPECT TO THIS RECOMMENDED PRACTICE

B2.1 DATA PRIVACY

Privacy of data formatted in compliance with the specifications of this Recommended Practice should be assured by the systems and networks on which this Recommended Practice is implemented.

B2.2 DATA INTEGRITY

Integrity of data formatted in compliance with the specifications of this Recommended Practice should be assured by the systems and networks on which this Recommended Practice is implemented.

B2.3 AUTHENTICATION OF COMMUNICATING ENTITIES

Authentication of communicating entities involved in the transport of data which complies with the specifications of this Recommended Practice should be provided by the systems and networks on which this Recommended Practice is implemented.

B2.4 DATA TRANSFER BETWEEN COMMUNICATING ENTITIES

The transfer of data formatted in compliance with this Recommended Practice between communicating entities should be accomplished via secure mechanisms approved by the IT Security functionaries of exchange participants.

B2.5 CONTROL OF ACCESS TO RESOURCES

This Recommended Practice assumes that control of access to resources will be managed by the systems upon which provider formatting and recipient processing are performed.

B2.6 POTENTIAL THREATS AND ATTACK SCENARIOS

There are no known potential threats or attack scenarios that apply specifically to the technologies specified in this Recommended Practice. Potential threats or attack scenarios applicable to the systems and networks on which this Recommended Practice is implemented should be addressed by the management of those systems and networks. Protection from unauthorized access is especially important if the mission utilizes open ground networks such as the Internet to provide ground station connectivity for the exchange of data formatted in compliance with this Recommended Practice.

B3 CONSEQUENCES OF NOT APPLYING SECURITY TO THE TECHNOLOGY

There are no explicitly known consequences of not applying security to the technologies specified in this Recommended Practice. The consequences of not applying security to the systems and networks on which this Recommended Practice is implemented could include potential loss, corruption, and theft of data.

B4 DATA SECURITY IMPLEMENTATION SPECIFICS

Specific information-security interoperability provisions that may apply between agencies involved in an exchange of data formatted in compliance with this Recommended Practice should be specified in an IA.

ANNEX C

SUPPORT REQUEST EXAMPLES

(INFORMATIVE)

C1 EXAMPLE 1

MVN1 DDOR 2014 228 2014 250 v2.sr

```

RequestId = 2014-205T15:50:00;
FormatVersion = 1;
MissionId = MVN1;
$START
ConfigId = 202F2;
ScId ScName ScFlux Pol Carrier DorOn DorOff =
SC01 MVN1 -142.33 RCP 8445770000.0 2014-228T02:25:00 2014-228T03:25:00
.
QuId QuName QuFlux =
QU01 P_1504-167 0.52
.
TrkStn Network TrackStart TrackEnd =
DS24 DSN 2014-228T02:25:00 2014-228T03:25:00
DS34 DSN 2014-228T02:25:00 2014-228T03:25:00
MG11 ESA 2014-228T02:25:00 2014-228T03:25:00
.
DdorEpoch = 2014-228T02:25:00;
ScanNum ScanSource ScanStart Duration =
1 SC01 00:00:00 00:01:00
2 QU01 00:03:00 00:05:00
3 SC01 00:10:00 00:06:00
4 QU01 00:18:00 00:07:30
5 SC01 00:27:30 00:06:00
6 QU01 00:35:30 00:07:30
7 SC01 00:45:00 00:06:00
8 QU01 00:53:00 00:05:00
.
ScSampleRate = 50000;
ScSampleSize = 8;
QuSampleRate = 2000000;
QuSampleSize = 2;
ChanNum ScAssoc SigComp DeltaFlux CohFlg DorMult Subcar Harm =
1 SC01 DORTONE -6.0 T 1/440 281248.0 +1
2 SC01 DORTONE -16.0 T 1/440 281248.0 +2
3 SC01 CARRIER -4.0 T 1/440 281248.0 0
4 SC01 DORTONE -6.0 T 1/440 281248.0 -1
.
$END
$START
ConfigId = 202F2;
ScId ScName ScFlux Pol Carrier DorOn DorOff =
SC01 MVN1 -142.33 RCP 8445770000.0 2014-250T01:25:00 2014-250T02:25:00
.
QuId QuName QuFlux =
QU01 P_1519-273 1.12
.
TrkStn Network TrackStart TrackEnd =
DS24 DSN 2014-250T01:25:00 2014-250T02:25:00
DS34 DSN 2014-250T01:25:00 2014-250T02:25:00
MG11 ESA 2014-250T01:25:00 2014-250T02:25:00
.
DdorEpoch = 2014-250T01:25:00;
ScanNum ScanSource ScanStart Duration =
1 SC01 00:00:00 00:01:00
2 QU01 00:03:00 00:05:00
3 SC01 00:10:00 00:06:00
4 QU01 00:18:00 00:07:30
5 SC01 00:27:30 00:06:00
6 QU01 00:35:30 00:07:30
7 SC01 00:45:00 00:06:00
8 QU01 00:53:00 00:05:00
.

```

DRAFT CCSDS RECOMMENDED PRACTICE FOR DELTA-DOR OPERATIONS

```
ScSampleRate = 50000;
ScSampleSize = 8;
QuSampleRate = 2000000;
QuSampleSize = 2;
ChanNum  ScAssoc  SigComp  DeltaFlux  CohFlg  DorMult  Subcar  Harm =
1  SC01  DORTONE  -6.0  T  1/440  281248.0  +1
2  SC01  DORTONE  -16.0  T  1/440  281248.0  +2
3  SC01  CARRIER  -4.0  T  1/440  281248.0  0
4  SC01  DORTONE  -6.0  T  1/440  281248.0  -1
.
$END
$$EOF
```

C2 EXAMPLE 2

PLC1_DDOR_2015_304_2015_304_v1.sr

```
RequestId = 2015-300T16:20:00;
FormatVersion = 1;
MissionId = PLC1;
$START
ConfigId = 005;
ScId  ScName  ScFlux  Pol  Carrier  DorOn  DorOff =
SC01  PLC1  -160.0  RCP  8410923709.0  2015-304T12:45:00  2015-304T13:45:00
.
QuId  QuName  QuFlux =
QU01  P_1055+01  2.00
QU02  P_1219+04  1.00
.
TrkStn  Network  TrackStart  TrackEnd =
DS54  DSN  2015-304T12:45:00  2015-304T13:45:00
DS15  DSN  2015-304T12:45:00  2015-304T13:45:00
.
DdorEpoch = 2015-304T12:45:00;
ScanNum  ScanSource  ScanStart  Duration =
1  SC01  00:00:00  00:01:30
2  QU01  00:02:00  00:05:30
3  SC01  00:08:00  00:09:30
4  QU02  00:18:00  00:07:30
5  SC01  00:26:00  00:09:30
6  QU01  00:36:00  00:07:30
7  SC01  00:44:00  00:09:30
8  QU02  00:54:00  00:05:30
.
ScSampleRate = 50000;
ScSampleSize = 8;
QuSampleRate = 4000000;
QuSampleSize = 2;
ChanNum  ScAssoc  SigComp  DeltaFlux  CohFlg  DorMult  Subcar  Harm =
1  SC01  CARRIER  0.0  F  1/1  262141.0  0
2  SC01  SUBCAR  -11.0  F  1/1  262141.0  -2
3  SC01  SUBCAR  -11.0  F  1/1  262141.0  +2
.
$END
$$EOF
```

C3 EXAMPLE 3

PRCN_DDOR_2015_305_2015_305_v5.sr

```

RequestId = 2015-302T14:45:00;
FormatVersion = 1;
MissionId = PRCN;
$START
ConfigId = HYB2-PRCN;
ScId ScName ScFlux Pol Carrier DorOn DorOff =
SC01 HYB2 -142.0 RCP 8425862163.0 2015-305T02:50:00 2015-305T05:00:00
SC02 PRCN -147.0 RCP 8445007928.0 2015-305T02:50:00 2015-305T05:00:00
.
QuId QuName QuFlux =
QU01 DA_406 2.10
QU02 OS_092 1.10
.
TrkStn Network TrackStart TrackEnd =
DS35 DSN 2015-305T03:00:00 2015-305T05:00:00
UDSC JAXA 2015-305T03:00:00 2015-305T05:00:00
.
DdorEpoch = 2015-305T03:00:00;
ScanNum ScanSource ScanStart Duration =
1 SC02 00:00:00 00:59:00
2 SC02 01:00:00 00:02:30
3 QU01 01:03:50 00:04:30
4 SC02 01:09:40 00:04:30
5 SC01 01:15:10 00:04:30
6 QU02 01:21:00 00:04:30
7 SC02 01:26:50 00:04:30
8 SC01 01:32:20 00:04:30
9 QU01 01:38:10 00:04:30
10 SC02 01:44:00 00:04:30
11 SC01 01:49:30 00:04:30
12 QU02 01:55:20 00:04:30
.
ScSampleRate = 50000;
ScSampleSize = 8;
QuSampleRate = 8000000;
QuSampleSize = 2;
ChanNum ScAssoc SigComp DeltaFlux CohFlg DorMult Subcar Harm =
1 SC01 CARRIER 0.0 T 0.000568095133743686 0 0
2 SC01 DORTONE -10.0 T 0.000568095133743686 0 -4
3 SC01 DORTONE -10.0 T 0.000568095133743686 0 +4
4 SC01 DORTONE -15.0 T 0.000568095133743686 0 +1
5 SC02 CARRIER 0.0 F 1/1 4797454.0 0
6 SC02 SUBCAR 0.0 F 1/1 47969999.0 +1
7 SC02 SUBCAR 0.0 F 1/1 38024695.0 -1
8 SC02 SUBCAR -15.0 F 1/1 4797454.0 +1
9 SC02 SUBCAR -10.0 F 1/1 4797454.0 -4
10 SC02 SUBCAR -28.0 F 1/1 4797454.0 +8
.
$END
$$EOF
    
```

C4 EXAMPLE 4

HYB2 DDOR 2014 363 2014 363 v7.sr

```

RequestId = 2014-353T00:30:00;
FormatVersion = 1;
MissionId = HYB2;
$START
ConfigId = 037SUB;
ScId ScName ScFlux Pol Carrier DorOn DorOff =
SC01 HYB2 -142.0 RCP 8425864198.0 2014-363T13:25:00 2014-363T15:25:00
.
QuId QuName QuFlux =
QU01 0454-234 1.60
.
TrkStn Network TrackStart TrackEnd =
DS34 DSN 2014-363T13:25:00 2014-363T15:25:00
UDSC JAXA 2014-363T13:25:00 2014-363T15:25:00
NN12 ESA 2014-363T14:36:40 2014-363T15:06:00
.
DdorEpoch = 2014-363T13:25:00;
ScanNum ScanSource ScanStart Duration =
1 QU01 00:00:20 00:05:50
2 SC01 00:06:50 00:05:00
3 QU01 00:12:30 00:06:10
4 SC01 00:19:20 00:05:00
5 QU01 00:25:00 00:06:10
6 SC01 00:31:50 00:05:00
7 QU01 00:37:30 00:06:10
8 SC01 00:44:20 00:04:20
9 SC01 00:49:00 00:03:40
10 SC01 00:53:00 00:04:20
11 SC01 00:57:40 00:03:40
12 SC01 01:01:40 00:04:20
13 SC01 01:06:20 00:03:40
14 SC01 01:10:20 00:04:20
15 QU01 01:15:20 00:06:00
16 SC01 01:22:00 00:05:20
17 QU01 01:28:00 00:06:20
18 SC01 01:35:00 00:05:20
19 QU01 01:41:00 00:06:20
20 SC01 01:48:00 00:05:20
21 QU01 01:54:00 00:05:20
.
ScSampleRate = 50000;
ScSampleSize = 8;
QuSampleRate = 8000000;
QuSampleSize = 2;
ChanNum ScAssoc SigComp DeltaFlux CohFlg DorMult Subcar Harm =
1 SC01 CARRIER 0.0 F 1/1 4786692.0 0
2 SC01 SUBCAR -10.0 F 1/1 4786692.0 -4
3 SC01 SUBCAR -15.0 F 1/1 4786692.0 +1
4 SC01 SUBCAR -10.0 F 1/1 4786692.0 +4
5 SC01 SUBCAR -28.0 F 1/1 4786692.0 -8
6 SC01 SUBCAR -28.0 F 1/1 4786692.0 +8
.
$END
$$EOF
    
```

ANNEX D**ABBREVIATIONS AND ACRONYMS****(INFORMATIVE)**

Abbreviations used in this document are defined with the first textual use of the term. All abbreviations used in this document are listed below.

| | |
|-----------|--|
| CCSDS | Consultative Committee for Space Data Systems |
| CSS | Cross Support Services |
| DCA | Data Collection Agency |
| DPA | Data Processing Agency |
| DUA | Data Usage Agency |
| Delta-DOR | delta Differential One-way Range |
| DOR | Differential One-way Range |
| DSN | Deep Space Network |
| ESA | European Space Agency |
| G/T | Antenna gain to system noise temperature ratio |
| Hz | Hertz |
| IA | Implementing Arrangement |
| ID | Identifier |
| IF | Interface |
| JAXA | Japan Aerospace Exploration Agency |
| JPL | Jet Propulsion Laboratory |
| MOIMS | Mission Operations and Information Management Services |
| NASA | National Aeronautics and Space Administration |
| OEM | Orbit Ephemeris Message |
| PLL | Phase Locked Loop |
| RF | Radio Frequency |

| | |
|------|-----------------------------------|
| Rx | Receiver |
| S/C | Spacecraft |
| SLE | Space Link Extensions |
| SLS | Space Link Services |
| TDM | Tracking Data Message (CCSDS) |
| UTC | Universal Time Coordinated |
| UVA | Under Validation Agency |
| VA | Validating Agency |
| VLBI | Very Long Baseline Interferometry |

ANNEX E

INFORMATIVE REFERENCES

(INFORMATIVE)

NOTE – Normative references are provided in 1.5.

- ~~[D1] *Procedures Manual for the Consultative Committee for Space Data Systems. CCSDS A00.0-Y-9. Yellow Book. Issue 9. Washington, D.C.: CCSDS, November 2003.*~~
- [E1] ~~*Delta-DOR Operations—Technical Characteristics and Performance. Draft Report Concerning Space Data System Standards, CCSDS 500.6-G-0. Proposed Green Book.*~~²~~*Delta-DOR—Technical Characteristics and Performance. Issue 1. Report Concerning Space Data System Standards (Green Book). CCSDS 500.1-G-1. Washington, D.C.: CCSDS, May 2013.*~~
- [E2] *Navigation Data—Definitions and Conventions. Issue 3. Report Concerning Space Data System Standards (Green Book), CCSDS 500.0-G-3. Washington, D.C.: CCSDS, May 2010.*
- [E3] *The Application of CCSDS Protocols to Secure Systems. Issue 2. Report Concerning Space Data System Standards (Green Book), CCSDS 350.0-G-2. Washington, D.C.: CCSDS, January 2006.*
- [E4] Catherine L. Thornton and James S. Border. *Radiometric Tracking Techniques for Deep-Space Navigation*. JPL Deep-Space Communications and Navigation Series. Joseph H. Yuen, Series Editor. Hoboken, N.J.: Wiley, 2003.
- [E5] *XML Specification for Navigation Data Messages. Issue 1. Recommendation for Space Data System Standards (Blue Book), CCSDS 505.0-B-1. Washington, D.C.: CCSDS, December 2010.*
- [E6] Theodore D. Moyer. *Formulation for Observed and Computed Values of Deep Space Network Data Types for Navigation*. JPL Deep-Space Communications and Navigation Series. Joseph H. Yuen, Series Editor. Hoboken, N.J.: Wiley, 2003.
- ~~[D8] James S. Border and John A. Koukos. “Technical Characteristics and Accuracy Capabilities of Delta Differential One Way Ranging (A-DOR) as a Spacecraft Navigation Tool.” Presented at Meeting of CCSDS Subpanel 1E for Radio Frequency & Modulation Systems, September 20, 1993 (Oberpfaffenhofen, Germany). <<http://trs-new.jpl.nasa.gov/dspace/bitstream/2014/35696/1/93-1419.pdf>>~~

² Will provide a detailed description of the Delta-DOR technique, including guidelines for DOR tone spectra, guidelines for selecting reference sources, applicable foundation equations, and a discussion of error sources and measurement accuracy that are not germane to the recommendations proposed in the Magenta Book.

~~[D9] “Delta Differential One-way Ranging.” July 15, 2004. Module 210 in *DSN Telecommunications Link Design Handbook*. DSN No. 810-005, Rev. E. Pasadena California: JPL, <<http://eis.jpl.nasa.gov/deepspace/dsndoes/810-005/>>~~

[E7] *Delta Differential One-way Ranging*. Module 210, Rev. A, February 9, 2015 in *DSN Telecommunications Link Design Handbook*. DSN No. 810-005, Rev. E. Pasadena California: JPL, November 30, 2000.

[E8] Timothy McElrath, et al. “Mars Exploration Rovers Orbit Determination Filter Strategy.” In *AIAA/AAS Astrodynamics Specialist Conference and Exhibit, August 16-19, 2004 (Providence, Rhode Island)*. Pasadena, CA: JPL, 2004.

~~[D11] *Time Code Formats—Recommendation for Space Data System Standards, CCSDS 301.0-B-4. Blue Book. Issue 4. Washington, D.C.: CCSDS, November 2010.*~~

[E9] *Space Communication Cross Support—Service Management—Service Specification*. Issue 1. Recommendation for Space Data System Standards (Blue Book), CCSDS 910.11-B-1. Washington, D.C.: CCSDS, August 2009.