

**Draft Recommendation for
Space Data System Standards**

**CROSS SUPPORT SERVICE
MANAGEMENT—
COMMUNICATIONS PLANNING
INFORMATION FORMAT**

DRAFT RECOMMENDED STANDARD

CCSDS 902.2-R-1

RED BOOK
November 2019



CCSDS

The Consultative Committee for Space Data Systems

**Draft Recommendation for
Space Data System Standards**

**CROSS SUPPORT SERVICE
MANAGEMENT—
COMMUNICATIONS PLANNING
INFORMATION FORMAT**

DRAFT RECOMMENDED STANDARD

CCSDS 902.2-R-1

**RED BOOK
November 2019**

AUTHORITY

Issue:	Red Book, Issue 1
Date:	November 2019
Location:	Not Applicable

(WHEN THIS RECOMMENDED STANDARD IS FINALIZED, IT WILL CONTAIN THE FOLLOWING STATEMENT OF AUTHORITY:)

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-4), and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the email address below.

This document is published and maintained by:

CCSDS Secretariat
National Aeronautics and Space Administration
Washington, DC, USA
Email: secretariat@mailman.ccsds.org

STATEMENT OF INTENT

(WHEN THIS RECOMMENDED STANDARD IS FINALIZED, IT WILL CONTAIN THE FOLLOWING STATEMENT OF INTENT:)

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of its members. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommended Standards** and are not considered binding on any Agency.

This **Recommended Standard** is issued by, and represents the consensus of, the CCSDS members. Endorsement of this **Recommendation** is entirely voluntary. Endorsement, however, indicates the following understandings:

- o Whenever a member establishes a CCSDS-related **standard**, this **standard** will be in accord with the relevant **Recommended Standard**. Establishing such a **standard** does not preclude other provisions which a member may develop.
- o Whenever a member establishes a CCSDS-related **standard**, that member will provide other CCSDS members with the following information:
 - The **standard** itself.
 - The anticipated date of initial operational capability.
 - The anticipated duration of operational service.
- o Specific service arrangements shall be made via memoranda of agreement. Neither this **Recommended Standard** nor any ensuing **standard** is a substitute for a memorandum of agreement.

No later than five years from its date of issuance, this **Recommended Standard** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or (3) be retired or canceled.

In those instances when a new version of a **Recommended Standard** is issued, existing CCSDS-related member standards and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each member to determine when such standards or implementations are to be modified. Each member is, however, strongly encouraged to direct planning for its new standards and implementations towards the later version of the Recommended Standard.

FOREWORD

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommended Standard is therefore subject to CCSDS document management and change control procedures, which are defined in the *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-4). Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be sent to the CCSDS Secretariat at the email address indicated on page i.

At time of publication, the active Member and Observer Agencies of the CCSDS were:

Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Federal Space Agency (FSA)/Russian Federation.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.
- UK Space Agency/United Kingdom.

Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSP0)/Belgium.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- China Satellite Launch and Tracking Control General, Beijing Institute of Tracking and Telecommunications Technology (CLTC/BITTT)/China.
- Chinese Academy of Sciences (CAS)/China.
- China Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- Danish National Space Center (DNSC)/Denmark.
- Departamento de Ciência e Tecnologia Aeroespacial (DCTA)/Brazil.
- Electronics and Telecommunications Research Institute (ETRI)/Korea.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Hellenic Space Agency (HSA)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- Mohammed Bin Rashid Space Centre (MBRSC)/United Arab Emirates.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Agency of the Republic of Kazakhstan (NSARK)/Kazakhstan.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- South African National Space Agency (SANSA)/Republic of South Africa.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.
- Swiss Space Office (SSO)/Switzerland.
- United States Geological Survey (USGS)/USA.

PREFACE

This document is a draft CCSDS Recommended Standard. Its 'Red Book' status indicates that the CCSDS believes the document to be technically mature and has released it for formal review by appropriate technical organizations. As such, its technical contents are not stable, and several iterations of it may occur in response to comments received during the review process.

Implementers are cautioned **not** to fabricate any final equipment in accordance with this document's technical content.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

DOCUMENT CONTROL

Document	Title	Date	Status
CCSDS 902.2-R-1	Cross Support Service Management—Communications Planning Information Format, Draft Recommended Standard, Issue 1	November 2019	Current draft

CONTENTS

<u>Section</u>	<u>Page</u>
1 INTRODUCTION	1-1
1.1 PURPOSE AND SCOPE.....	1-1
1.2 APPLICABILITY.....	1-2
1.3 RATIONALE.....	1-2
1.4 DOCUMENT STRUCTURE	1-3
1.5 DEFINITIONS.....	1-4
1.6 NOMENCLATURE	1-4
1.7 CONVENTIONS.....	1-5
1.8 REFERENCES	1-5
2 OVERVIEW	2-1
2.1 GENERAL.....	2-1
2.2 PLANNING INFORMATION FORMATS	2-1
2.3 MAPPING TO W3C XML SCHEMA	2-1
3 PLANNING INFORMATION	3-1
3.1 GENERAL.....	3-1
3.2 PLANNING INFORMATION CONTENT/STRUCTURE	3-1
3.3 DEFINED EVENT CLASSES	3-9
3.4 PARAMETERS.....	3-21
ANNEX A IMPLEMENTATION CONFORMANCE STATEMENT (ICS) PROFORMA (NORMATIVE)	A-1
ANNEX B SECURITY, SANA, AND PATENT CONSIDERATIONS (INFORMATIVE)	B-1
ANNEX C XML SCHEMA ORGANIZATION, PACKAGING, AND EXAMPLES FOR THE PLANNING INFORMATION FORMATS (INFORMATIVE)	C-1
ANNEX D ABBREVIATIONS AND ACRONYMS	D-1
ANNEX E INFORMATIVE REFERENCES (INFORMATIVE)	E-1

Figure

1-1 Planning Information Formats in the Context of Space Communication Cross Support Service Management.....	1-1
3-1 Planning Information Class Diagram	3-2
3-2 Sun Alignment Angle	3-11

CONTENTS (continued)

<u>Table</u>	<u>Page</u>
3-1 Class PlanningInfoHeader Parameters	3-4
3-2 Class PlanningInfoHeader Additional Parameters	3-4
3-3 Class PlanningInfoEventAssociation Parameters	3-8
3-4 Predicted Communications Geometry DefinedEvents	3-9
3-5 Class DefinedEvent Parameters in the Context of Derived Classes of Type COMMS	3-10
3-6 Class ElevationAscendingEvent Parameters	3-11
3-7 Class ElevationDescendingEvent Parameters	3-12
3-8 Class MaximumElevationEvent Parameters	3-12
3-9 Class OccultationStartEvent Parameters	3-13
3-10 Class OccultationEndEvent Parameters	3-13
3-11 Class SunAlignmentAngleEvent Parameters	3-14
3-12 Class RangeEvent Parameters	3-14
3-13 Class RangeRateEvent Parameters	3-15
3-14 Class RtlEvent Parameters	3-15
3-15 Class RetComsStartEvent Parameters	3-16
3-16 Class RetComsEndEvent Parameters	3-16
3-17 Class FwdComsStartEvent Parameters	3-17
3-18 Class FwdComsEndEvent Parameters	3-17
3-19 Class KeyholeStartEvent Parameters	3-18
3-20 Class KeyholeEndEvent Parameters	3-18
3-21 Class CableWrapStartEvent Parameters	3-19
3-22 Class CableWrapEndEvent Parameters	3-19
3-23 Parameter elevation Definition	3-21
3-24 Parameter azimuth Definition	3-21
3-25 Parameter angle Definition	3-21
3-26 Parameter celestialBody Definition	3-21
3-27 Parameter occType Definition	3-21
3-28 Parameter range Definition	3-22
3-29 Parameter rangeRate Definition	3-22
3-30 Parameter rtlt Definition	3-22
3-31 Parameter wrapDirection Definition	3-22
A-1 Parameters Created for NameOfAdditionalEvent Class Definition	A-18
A-2 AbstractParameter Class Instantiated for PlanningInfoHeader Class	A-20
A-3 AbstractParameter Class Instantiated for PlanningInfoData Class	A-20
A-4 AbstractParameter Class Instantiated for Classes Derived from DefinedEvent Class	A-20
A-5 AbstractParameter Class Instantiated for Classes Derived from AdditionalEvent Class	A-20

1 INTRODUCTION

1.1 PURPOSE AND SCOPE

1.1.1 PURPOSE

This Recommended Standard for Planning Information Formats specifies standard formats for use in transferring planning information related to ground stations and/or relay satellites between space agencies and commercial or governmental spacecraft operators. It can also be used in the case in which there is a landed asset (e.g., a rover) on a nonterrestrial celestial body. Such exchanges are used in

- a) mission design, that is, in investigating the feasibility of a mission with respect to its uplink/downlink requirements and the availability of suitable ground station/relay satellite availability; and
- b) operation planning, that is, checking that sufficient ground station/relay satellite resources are allocated to carry out the planned operations; this is typically an iterative process with the details becoming more refined as the execution time of the operations approach.

1.1.2 SCOPE

The scope of this Recommended Standard is limited to the exchange of planning information required in the context of CCSDS Service Management. In figure 1-1, the Planning Information Formats specification is put into context with the various standards that together form the Space Communication Cross Support Service Management.

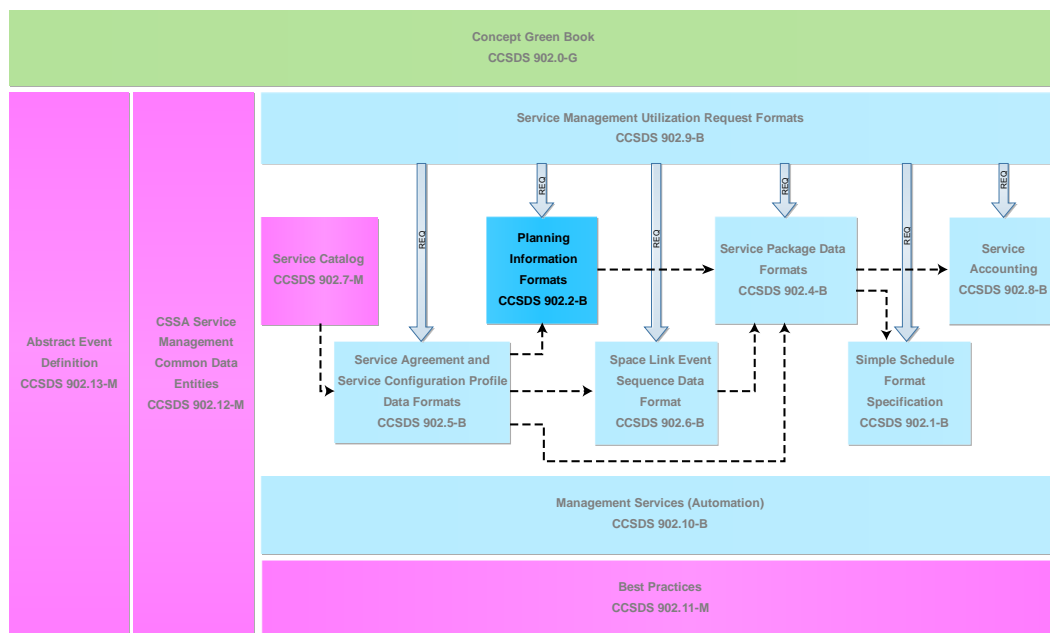


Figure 1-1: Planning Information Formats in the Context of Space Communication Cross Support Service Management

1.1.2.1 Planning Information

The purpose of the planning information is to supply information from the Provider Cross Support Service System (CSSS)¹ that is necessary to the planning of feasible service opportunities to the User CSSS. With this in mind, it is foreseen that the Planning Information Formats Recommended Standard will convey the following types of planning information:

In the current issue:

- a) predicted communications geometry events (see 3.3.1 below);

In a future revision of this Recommended Standard:

- b) sustainable data rates and volume estimate events;
- c) predicted radio frequency interference events;
- d) predicted resource conflict events;
- e) cost estimates.

The specific types of planning information contained in the planning information generated by a given Provider CSSS will depend on the kinds of planning information that it is capable of generating and that its client missions deem useful.

Planning information may be used as a basis for establishing a Service Agreement. The planning information is communicated from the Provider CSSS to the mission.

1.2 APPLICABILITY

This Recommended Standard is applicable only to the planning information formats and contents, not to its transmission.

1.3 RATIONALE

1.3.1 GENERAL

The primary goal of CCSDS is to increase the level of interoperability among Agencies. This Recommended Standard furthers that goal by establishing the means to exchange planning information relating to where most cross-support activity occurs: between the tracking stations or ground data handling systems of various Agencies and the mission-specific components of a mission ground system.

The use cases described in the following sections were considered in deriving this Recommended Standard.

¹ A Provider Cross Support Service System is often colloquially referred to as a Network.

1.3.2 USE CASES

1.3.2.1 Mission Design

During the design phase of a mission, it is often desirable to be able to obtain some idea of the availability of ground station/relay satellite availability (or in the case of a landed asset the visibility periods) so that the feasibility of obtaining the required uplink and downlink bandwidth can be assessed. Typically, during the mission design phase, the information required relates to periods several years in the future. Currently there is no standardized way for specifying the mission requirements and constraints between different agencies.

Whilst this Recommended Standard does not address the mechanism by which the required planning information can be exchanged (this possibly being covered in the negotiations involved in establishing the service agreement), it provides a standard format in which the mission requirements and constraints can be specified.

1.3.2.2 Mission Planning

In the mission-planning use case, the user agency provides the provider agency with a set of planning information that gives the provider agency the information it requires to allocate the appropriate resources to the user agency. It should be noted that this does not imply that the user agency will be allocated all the resources it requests. The allocation made by the provider agency will also take into account the needs of all users of its network and other constraints such as any limits on usage that may have been specified in the service agreement between the agencies.

It should also be noted that the planning process will typically go through a number of cycles, starting months before the actual activities are expected to take place and being finalized a few days before execution. During these planning cycles, the operations will be refined as better orbit/trajectory/attitude predictions become available and/or science objectives are modified.

1.4 DOCUMENT STRUCTURE

This document is organized as follows:

- a) Section 1 provides the purpose, scope, applicability, and rationale of this Recommended Standard and identifies the conventions and references used throughout the document. This section also describes how this document is organized. A brief description is provided for each section and annex so that the reader will have an idea of where information can be found in the document. It also identifies terminology that is used in this document but is defined elsewhere.
- b) Section 2 provides a brief overview of the CCSDS-recommended planning information formats.
- c) Section 3 provides details about the structure and content of the planning information formats.

- d) Annex A contains the Implementation Conformance Statement (ICS) proforma.
- e) Annex B discusses security, SANA, and patent considerations.
- f) Annex C provides an informative description of the XML schema organization and packaging, as well as examples of the planning information formats.
- g) Annex D contains a list of abbreviations and acronyms applicable to the planning information formats.
- h) Annex E is a list of informative references.

1.5 DEFINITIONS

For the purposes of this document, the following definition applies:

agency: A satellite operator or satellite service provider.

1.6 NOMENCLATURE

1.6.1 NORMATIVE TEXT

The following conventions apply for the normative specifications in this Recommended Standard:

- a) the words ‘shall’ and ‘must’ imply a binding and verifiable specification;
- b) the word ‘should’ implies an optional, but desirable, specification;
- c) the word ‘may’ implies an optional specification;
- d) the words ‘is’, ‘are’, and ‘will’ imply statements of fact.

NOTE – These conventions do not imply constraints on diction in text that is clearly informative in nature.

1.6.2 INFORMATIVE TEXT

In the normative sections of this document, informative text is set off from the normative specifications either in notes or under one of the following subsection headings:

- Overview;
- Background;
- Rationale;
- Discussion.

1.7 CONVENTIONS

1.7.1 THE UNIFIED MODELING LANGUAGE

The Unified Modelling Language (UML) diagrams used in the specification (including class diagrams, package diagrams, sequence diagrams, and activity diagrams) follow the notation, semantics, and conventions imposed by the Version 2.4.1 UML specification of the Object Management Group (OMG) (reference [1]).

Within the document, use is made only of class diagrams. A UML class diagram describes the structure of a message, its parts, and how those parts interrelate. A UML class, represented in the diagram as a box, represents a data set. Class diagram conventions include composition, generalization, multiplicity, and constraints. Enumeration notation is also used, but only when it is involved in a composition constraint.

1.8 REFERENCES

The following publications contain provisions which, through reference in this text, constitute provisions of this document. At the time of publication, the editions indicated were valid. All publications are subject to revision, and users of this document are encouraged to investigate the possibility of applying the most recent editions of the publications indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS publications.

- [1] *Unified Modeling Language (UML)*. Version 2.4.1. Needham, Massachusetts: Object Management Group, August 2011.
- [2] “Planet and Satellite Names and Discoverers.” *Gazetteer of Planetary Nomenclature*. <https://planetarynames.wr.usgs.gov/Page/Planets>.
- [3] “Minor Planet Names: Alphabetical List.” *Minor Planet Center*. <https://minorplanetcenter.net/iau/lists/MPNames.html>.
- [4] *Cross Support Service Management—Common Data Entities*. Issue 1. Draft Recommendation for Space Data System Practices (Red Book), CCSDS 902.12-R-1. Washington, D.C.: CCSDS, August 2019.²
- [5] *Abstract Event Definition*. Issue 1. Draft Recommendation for Space Data System Practices (Red Book), CCSDS 902.13-R-1. Washington, D.C.: CCSDS, August 2019.
- [6] *CCSDS SANA Registry Management Policy*. Issue 1. CCSDS Record (Yellow Book), CCSDS 313.1-Y-1. Washington, D.C.: CCSDS, May 2016.
- [7] *CCSDS Space Assigned Numbers Authority (SANA)--Role, Responsibilities, Policies, and Procedures*. Issue 2. CCSDS Record (Yellow Book), CCSDS 313.0-Y-2. Washington, D.C.: CCSDS, May 2016.

² Reference to particular parts reference [4] are correct as of the publication date but may be subject to change.

2 OVERVIEW

2.1 GENERAL

This section provides a high-level overview of the CCSDS-recommended planning information formats, which is designed to facilitate standardized exchanges of planning information between space agencies.

2.2 PLANNING INFORMATION FORMATS

The planning information consists of files that are XML formatted. The formats of these files are suitable for automated interaction and/or (by means of a suitable XML viewer) human interaction.

Planning information is either mandatory, in which case, suitable values must be present, or optional, in which case, values may be present or not. Additionally, it is possible to extend the contents of the various planning information formats by defining additional parameters. The content of any parameters defined is outside the scope of this document and should be documented in an ICD agreed by the involved parties.

2.3 MAPPING TO W3C XML SCHEMA

This Recommended Standard includes the specification of a mapping to World Wide Web Consortium (W3C) eXtensible Markup Language (XML) schema. The normative mapping of this Recommended Standard to XML W3C schemas is a virtual annex to this Recommended Standard and is contained in a stand-alone set of schema files.

NOTE – The XML schema has been elaborated on the basis of the mapping guidelines described in reference [E2].

3 PLANNING INFORMATION

3.1 GENERAL

The planning information shall consist of digital data exchanged in the form of a file.

3.2 PLANNING INFORMATION CONTENT/STRUCTURE

3.2.1 OVERVIEW

Figure 3-1 shows the UML Class diagram for the planning information. It should be noted that, for clarity, *abstract* classes are highlighted in green.

The attributes of each class are described further in the following subsections and tables.

NOTES

- 1 In tables 3-1–3-31, *xsd:nnn* in the Data Type column indicates that the type is an XML Schema type. Thus, for example, *xsd:string* indicates that the type is an XML Schema string.
- 2 In general, the length of strings in this Recommended Standard is unbounded, that is, no length is specified (in practice, there is obviously the constraint of the maximum string length supported); however, in a number of cases in the various SANA registries, a length for string values is specified. For these cases, the effective restriction on string length shall be taken as the value specified in the SANA registry definition.

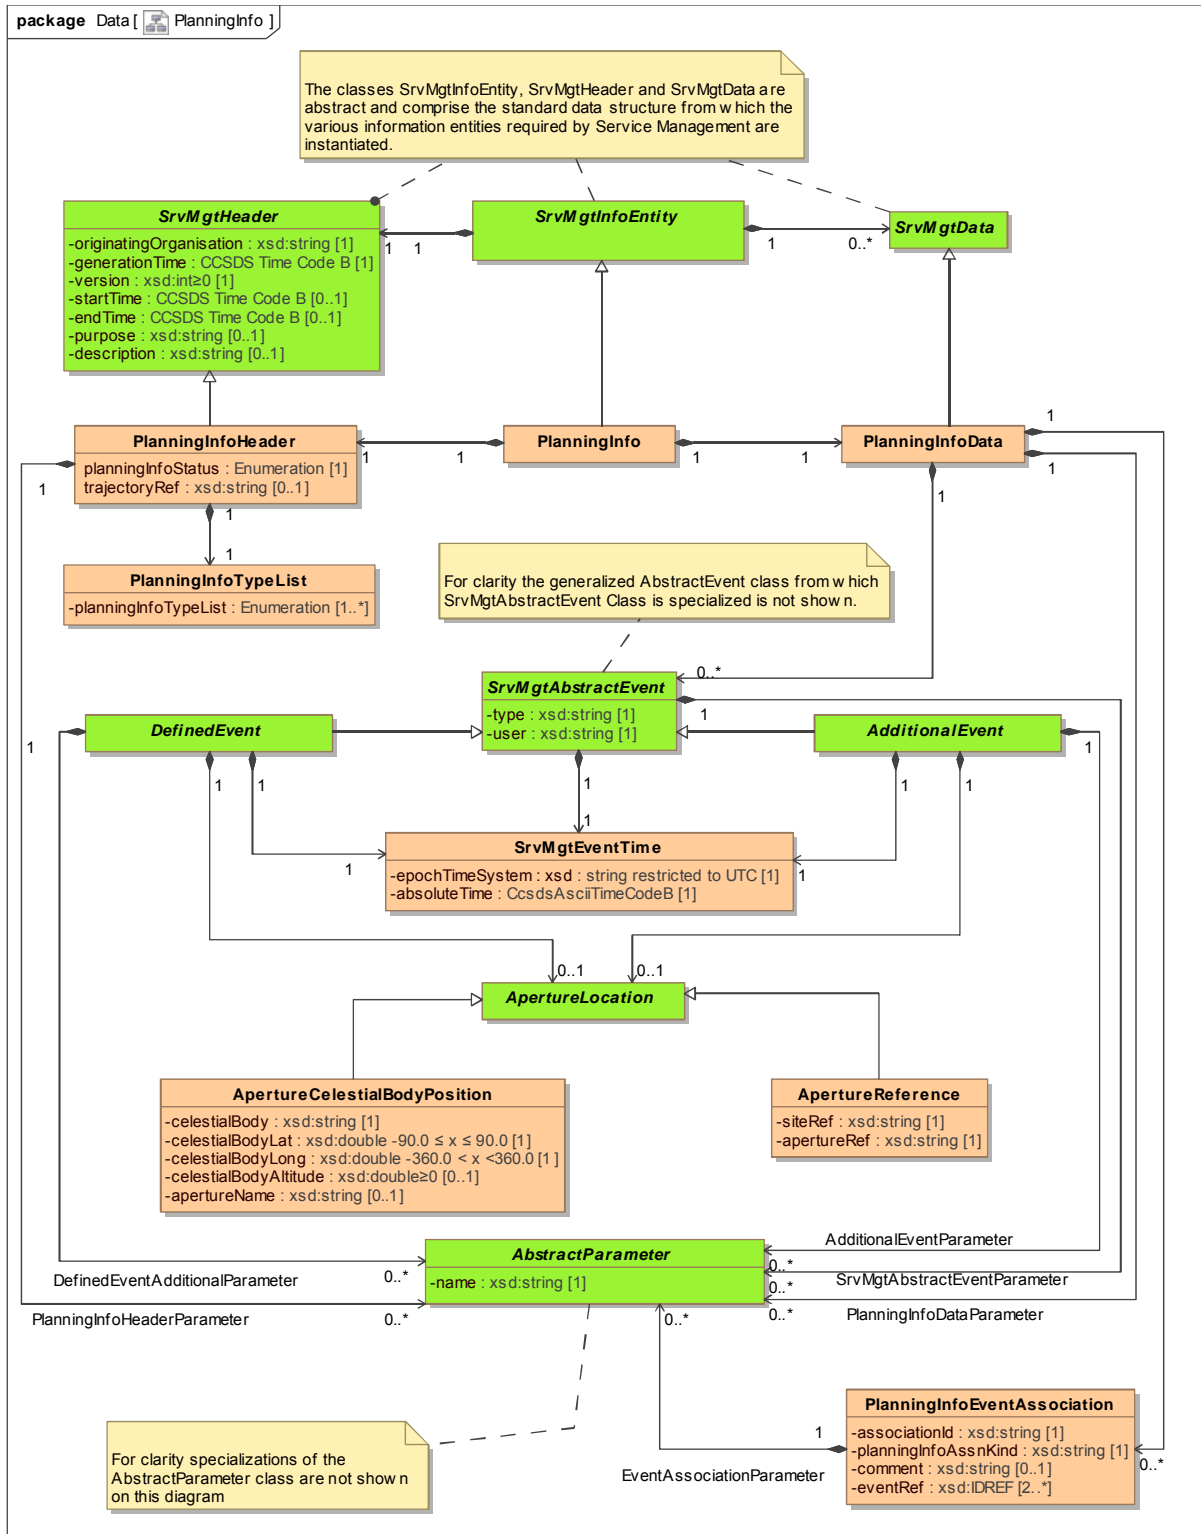


Figure 3-1: Planning Information Class Diagram

3.2.2 CLASS PlanningInfo

3.2.2.1 The PlanningInfo class is mandatory and shall constitute the planning information entity.

NOTE – The PlanningInfo class is a specialization of the SrvMgtInfoEntity class described in reference [4], and the generic description of the parameters is given there.

3.2.2.2 A PlanningInfo class shall contain the following:

- a) one and only one instance of the PlaningInfoHeader class;
- b) one and only one instance of the PlanningInfoData class.

NOTE – The SrvMgtInfoEntity class contains no parameters (see reference [5], subsection 3.1.2).

3.2.3 CLASS PlanningInfoHeader

3.2.3.1 The PlanningInfoHeader class is mandatory and shall constitute the ‘header’ of the planning information.

NOTE – The PlanningInfoHeader class is a specialization of the SrvMgtHeader class described in reference [4], and the generic description of the parameters is given there.

3.2.3.2 Each instance of the PlanningInfoHeader class must contain one and only one instance of the PlanningInfoTypeList as described in reference [4].

3.2.3.3 Each instance of the PlanningInfoHeader class may have zero or more instances of parameter classes derived from the SrvMgtAbstractEvent abstract class described in reference [4]. Usage of any additional parameters so specified is not within the scope of this document and should be specified in an ICD between the relevant parties.

3.2.3.4 Table 3-1 specifies the use of the parameters in the SrvMgtHeader in the scope of the PlanningInfoHeader class.

3.2.3.5 The parameters for the PlanningInfoHeader class shall be as described in reference [4], except as stated in table 3-1.

Table 3-1: Class PlanningInfoHeader Parameters

Parameter	Description	Data Type	Data Units
startTime	The time at which the planning information starts. This corresponds to the time at which the earliest event contained in the planning information occurs.	(See reference [4].)	(See reference [4].)
endTime	The time at which the planning information ends. This corresponds to the time at which the latest event contained in the planning information occurs.	(See reference [4].)	(See reference [4].)

3.2.3.6 Additional parameters for the PlanningInfoHeader class shall be those defined in table 3-2.

Table 3-2: Class PlanningInfoHeader Additional Parameters

Parameter	Description	Data Type	Data Units
planningInfoStatus	The status of the planning information.	Enumeration The following values are permitted: – TEST indicates that the planning information has been generated for test purposes only. – OPERATIONAL indicates that this is an operational planning information, but may still be subject change.	n/a
trajectoryXRef	Optional Parameter. This is used to specify a reference to the trajectory that was used to generate the planning information file data. (See 3.2.3.7 and 3.2.3.8 for additional information.)	xsd:string	n/a

3.2.3.7 If possible, all data in any particular planning information file should be generated from one set of trajectory data.

3.2.3.8 In the event that more than one set of trajectory data is used in the generation of the planning information file data, a reference to only the **latest** trajectory data should be included.

3.2.4 CLASS PlanningInfoData

3.2.4.1 The PlanningInfoData class is mandatory and shall constitute the ‘body’ of the planning information.

NOTE – The PlanningInfoData class is a specialization of the SrvMgtData class described in reference [4], and the generic description of the parameters is given there.

3.2.4.2 Each instance of the PlanningInfoData class may have zero or more instances of parameter classes derived from the AbstractParameter abstract class described in reference [4]. Usage of any additional parameters so specified is not within the scope of this document and should be specified in an ICD between by the relevant parties.

3.2.4.3 Each instance of the PlanningInfoData class may contain zero or more instances of a class derived from the SrvMgtAbstractEvent class, that is, either a class derived from DefinedEvent or AdditionalEvent classes.

3.2.4.4 If there are any classes derived from the SrvMgtAbstractEvent class, that is, either a class derived from DefinedEvent or AdditionalEvent classes, these shall appear in order of increasing time.

3.2.5 CLASS PlanningInfoTypeList

The PlanningInfoTypeList class is mandatory and shall allow the specification of a list of Planning Info Types.

NOTE – The PlanningInfoTypeList class is fully described in reference [4].

3.2.6 CLASS DefinedEvent (Abstract)

3.2.6.1 The DefinedEvent class is optional and may be used to derive the classes for events that are contained in this Recommended Standard.

NOTE – The DefinedEvent class is a specialization of the SrvMgtAbstractEvent class described in reference [4], and the generic description of the parameters is given in that document.

3.2.6.2 In the context of service management, for each instance of a DefinedEvent there must be one and only one instance of the SrvMgtEventTime class described in reference [4].

3.2.6.3 There shall be zero or more instances of the DefinedEvent class for each instance of the PlanningInfoData class.

3.2.6.4 Each instance of the DefinedEvent class may have zero or more instances of parameter classes derived from the AbstractParameter abstract class described in reference [4]. Usage of these additional events is not within the scope of this Recommended Standard and should be specified in an ICD between the relevant parties.

NOTES

- 1 These parameter classes can be used to specify Additional Parameters, that is, parameters for events that are not defined in this Recommended Standard. The need for this may arise if it is found that, in certain cases (or missions), the parameters defined in this Recommended Standard are not sufficient and additional information is required.
- 2 The various events defined in this Recommended Standard are specified in 3.3 below.

3.2.7 CLASS AdditionalEvent (ABSTRACT)

3.2.7.1 The AdditionalEvent abstract class is optional and may be used to instantiate events not defined in this Recommended Standard.

NOTES

- 1 The need for this may arise if it is found that, in certain cases (or missions), the events defined in this Recommended Standard are not sufficient and additional events are required.
- 2 The AdditionalEvent class is a specialization of the SrvMgtAbstractEvent class described reference [4], and the description of the parameters is given in that document.

3.2.7.2 In the context of service management, for each instance of an AdditionalEvent, there must be one and only one instance of the SrvMgtEventTime class described in reference [4].

3.2.7.3 There shall be zero or more instances of the AdditionalEvent class for each instance of the PlanningInfoData class.

3.2.7.4 Each instance of the AdditionalEvent class may have zero or more instances of parameter classes derived from the AbstractParameter abstract class described in reference [4]. The usage of these additional events is not within the scope of this document and should be specified in an ICD between the relevant parties.

3.2.8 CLASS AbstractParameter (ABSTRACT)

3.2.8.1 The AbstractParameter abstract class is optional and may be used to instantiate parameters for an event.

NOTE – The AbstractParameter abstract class is fully described in reference [5].

3.2.9 CLASS ApertureLocation (ABSTRACT)

3.2.9.1 The ApertureLocation abstract class is optional and may be used to instantiate the various classes of aperture location required by service management.

NOTE – The ApertureLocation abstract class is fully described in reference [4].

3.2.10 CLASS ApertureReference

3.2.10.1 The ApertureReference class is optional and may be used to specify of the location of an aperture by the site name where it is located and the name of the aperture.

NOTE – The ApertureReference class is a specialization of the ApertureLocation class mentioned in 3.2.9 and fully defined in reference [4].

3.2.11 CLASS ApertureCelestialBodyPosition

3.2.11.1 The ApertureCelestialBodyPosition class is optional and may be used to specify an arbitrary location on a celestial body by means of latitude and longitude.

NOTES

- 1 The ApertureCelestialBodyPosition class is a specialization of the ApertureLocation class mentioned in 3.2.9 and fully defined in reference [4].
- 2 The ApertureCelestialBodyPosition class can also be used to specify the position of an aperture as though it were located at the center of a celestial body. The reason and specification for doing this are defined in reference [4].

3.2.12 CLASS PlanningInfoEventAssociation

3.2.12.1 The PlanningInfoEventAssociation class is optional and may be used to specify associations between two or more events.

3.2.12.2 There shall be zero or more instances of the PlanningInfoEventAssociation class in the PlanningInfoData class.

3.2.12.3 Each instance of the `PlanningInfoEventAssociation` class may have zero or more instances of parameter classes derived from the `AbstractParameter` abstract class described in reference [4]. Usage of any additional parameters so specified is not within the scope of this document and should be specified in an ICD between the relevant parties.

3.2.12.4 The parameters of the `PlanningInfoEventAssociation` shall be as defined in table 3-3.

Table 3-3: Class `PlanningInfoEventAssociation` Parameters

Parameter	Description	Data Type	Data Units
<code>associationId</code>	An identifier that uniquely identifies the association. This is assigned by the Provider CSSS. It should be noted that if a schedule is regenerated, then the <code>associationId</code> for a particular event association may change	<code>xsd:string</code>	n/a
<code>planningInfoAssnKind</code>	The type of the association.	<code>xsd:string</code> Permitted values are registered in SANA (see B2.5 for further information).	n/a
<code>comment</code>	Optional parameter: may be used for the provision of ad hoc information.	<code>xsd:string</code> Exact use of this may be specified in an ICD between relevant parties.	n/a
<code>eventIdRef</code>	A list of the identifiers (see the definition of the <code>AbstractEvent</code> class in reference [5] of the events that are associated.	Array of <code>xsd:IDREF</code>	n/a

3.2.12.5 The `xsd:IDREF` type shall be used for an attribute that references an ID:

- a) all attributes of type `xsd:IDREF` must reference an `xsd:ID` in the same XML document;
- b) as with ID, an `xsd:IDREF` value must be an NCName.

3.2.12.6 For a `PlanningInfoEventAssociation` to be valid, it must refer to a least two events that are in the same XML document (file).

3.3 DEFINED EVENT CLASSES

3.3.1 EVENT TYPE: COMMS

3.3.1.1 General

3.3.1.1.1 The predicted communications geometry events associated with the COMMS event type (see reference [E1], subsection 5.7) shall be as specified in table 3-4.

Table 3-4: Predicted Communications Geometry Defined Events

Event/Class Name	Description	Defined Parameter(s)
ElevationAscendingEvent	Ascending angle of elevation with respect to aperture, that is, when the aperture passes through a specified angle when ascending.	(See 3.3.1.3.)
ElevationDescendingEvent	Descending angle of elevation with respect to aperture, that is, when the aperture passes through a specified angle when descending.	(See 3.3.1.4.)
MaximumElevationEvent	Maximum elevation with respect to aperture.	(See 3.3.1.5.)
OccultationStartEvent	Start of occultation with respect to aperture.	(See 3.3.1.6.)
OccultationEndEvent	End of occultation with respect to aperture.	(See 3.3.1.7.)
SunAlignmentAngleEvent	Sun alignment angle (see 3.3.1.2 for definition).	(See 3.3.1.8.)
RangeEvent	Distance with respect to aperture.	(See 3.3.1.9.)
RangeRateEvent	Rate at which the range is changing with respect to aperture.	(See 3.3.1.10.)
RtltEvent	Round Trip Light Time with respect to aperture.	(See 3.3.1.11.)
RetComsStartEvent	Start of possible Return communication window with respect to the Provider's constraints for tracking and receiving a return signal.	(See 3.3.1.12.)
RetComsEndEvent	End of possible Return communication window with respect to the Provider's constraints for tracking and receiving a return signal.	(See 3.3.1.13.)
FwdComsStartEvent	Start of possible Forward communication window with respect to the Provider's constraints for tracking and transmitting a forward signal.	(See 3.3.1.14.)
FwdComsEndEvent	End of possible Forward communication window with respect to the Provider's constraints for tracking and transmitting a forward signal.	(See 3.3.1.15.)
KeyholeStartEvent	Start of Keyhole occurrence at aperture.	(See 3.3.1.16.)
KeyholeEndEvent	End of Keyhole occurrence at aperture.	(See 3.3.1.17.)
CableWrapStartEvent	Start of Cable wrap occurrence at aperture.	(See 3.3.1.18.)
CableWrapEndEvent	End of Cable wrap occurrence at aperture.	(See 3.3.1.19.)

NOTE – The Forward and Return Communication Start and End events are used by the provider to specify the possible start and end of communication service windows to a user platform, relative to any and all limitations and constraints under which that provider can execute user services. The specific limitations and constraints

are not implied and are left up to the provider to consider, so long as the user platform can plan and request any service whose Start and End times are contained (inclusive) within the timeframe bounded by the COMS_START and COMS_END events.

Typical limitations and constraints accounted for when defining the COMS_START and COMS_END events are constraints associated with antenna elevation, cable wrap, visibility masks, slew rates, etc.

3.3.1.1.2 All classes defining events of type COMMS are derived from the DefinedEvent abstract class defined in 3.2.5. The use of the parameters in the DefinedEvent class for derived classes of type COMMS shall be as specified in table 3-5.

Table 3-5: Class DefinedEvent Parameters in the Context of Derived Classes of Type COMMS

Parameter	Description	Data Type	Data Units
type	In the context of the DefinedEvent class, this parameter is mandatory and is used to specify the type of the event.	xsd:string—permitted values – COMMS Predicted communications geometry events (see reference [E1], subsection 5.7)	n/a
user	In the context of the DefinedEvent class, this parameter is mandatory. ³	xsd:string—permitted values registered in SANA	n/a

³ For Earth-based apertures, the user is typically a spacecraft that is either using a particular set of ground station apertures or will potentially use those apertures. This is in keeping with a traditional notion of service provider vs. service user. For off-Earth-based apertures, the user is typically a spacecraft providing relay services for the off-Earth-based aperture (which is likely to be a rover or other in-situ asset). Broader terms that encompass both of these cases are ‘observer’ and ‘observed’. In all cases, the aperture is considered to be the ‘observer’, and the spacecraft for which communication geometry is stated is the ‘observed’. This recommendation retains the term ‘user’ to be consistent with a common data header for all of service management, but the term ‘user’ can and should be read as ‘observed’ for this recommendation.

3.3.1.2 Sun Alignment Angle Definition

The Sun Alignment Angle shall be the angle between the sun, the aperture (observer), and the spacecraft (observed) at a given time, with the aperture as the reference point (see figure 3-2).

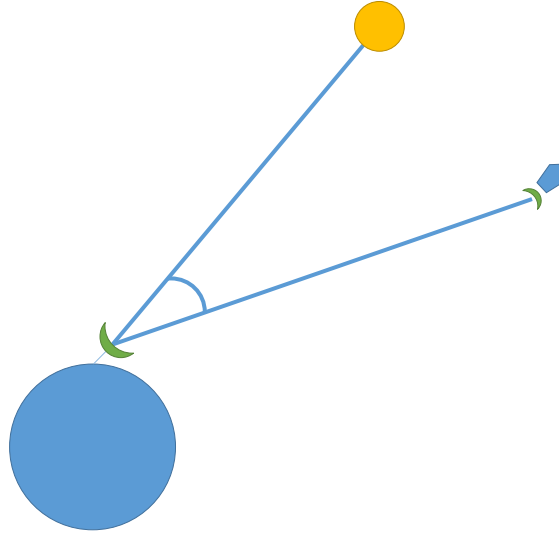


Figure 3-2: Sun Alignment Angle

3.3.1.3 Class ElevationAscendingEvent

3.3.1.3.1 The ElevationAscendingEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-6.

Table 3-6: Class ElevationAscendingEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	Y	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.3.2 The ElevationAscendingEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.4 Class ElevationDescendingEvent

3.3.1.4.1 The ElevationDescendingEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-7.

Table 3-7: Class ElevationDescendingEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	Y	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.4.2 The ElevationDescendingEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.5 Class MaximumElevationEvent

3.3.1.5.1 The MaximumElevationEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-8.

Table 3-8: Class MaximumElevationEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	Y	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.5.2 The MaximumElevationEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.6 Class OccultationStartEvent

3.3.1.6.1 The OccultationStartEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-9.

Table 3-9: Class OccultationStartEvent Parameters

Parameter	Mandatory	Parameter Definition
celestialBody	Y	(See table 3-26.)
occType	N	(See table 3-27.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.6.2 The OccultationStartEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.7 Class OccultationEndEvent

3.3.1.7.1 The OccultationEndEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-10.

Table 3-10: Class OccultationEndEvent Parameters

Parameter	Mandatory	Parameter Definition
celestialBody	Y	(See table 3-26.)
occType	N	(See table 3-27.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.7.2 The OccultationEndEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.8 Class SunAlignmentAngleEvent

3.3.1.8.1 The SunAlignmentAngleEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-11.

Table 3-11: Class SunAlignmentAngleEvent Parameters

Parameter	Mandatory	Parameter Definition
angle	Y	(See table 3-25.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.8.2 The SunAlignmentAngleEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.9 Class RangeEvent

3.3.1.9.1 The RangeEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-12.

Table 3-12: Class RangeEvent Parameters

Parameter	Mandatory	Parameter Definition
range	Y	(See table 3-28.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.9.2 The RangeEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.10 Class RangeRateEvent

3.3.1.10.1 The RangeRateEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-13.

Table 3-13: Class RangeRateEvent Parameters

Parameter	Mandatory	Parameter Definition
rangeRate	Y	(See table 3-29.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)

3.3.1.10.2 The RangeRateEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.11 Class RtlEvent

3.3.1.11.1 The RtlEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-14.

Table 3-14: Class RtlEvent Parameters

Parameter	Mandatory	Parameter Definition
rtlt	Y	(See table 3-30.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rangeRate	N	(See table 3-29.)

3.3.1.11.2 The RtlEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.12 Class RetComsStartEvent

3.3.1.12.1 The RetComsStartEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-15.

Table 3-15: Class RetComsStartEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.12.2 The RetComsStartEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.13 Class RetComsEndEvent

3.3.1.13.1 The RetComsEndEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-16.

Table 3-16: Class RetComsEndEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.13.2 The RetComsEndEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.14 Class FwdComsStartEvent

3.3.1.14.1 The FwdComsStartEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-17.

Table 3-17: Class FwdComsStartEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.14.2 The FwdComsStartEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.15 Class FwdComsEndEvent

3.3.1.15.1 The FwdComsEndEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-18.

Table 3-18: Class FwdComsEndEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.15.2 The FwdComsEndEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.16 Class KeyholeStartEvent

3.3.1.16.1 The KeyholeStartEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-19.

Table 3-19: Class KeyholeStartEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.16.2 The KeyholeStartEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.17 Class KeyholeEndEvent

3.3.1.17.1 The KeyholeEndEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-20.

Table 3-20: Class KeyholeEndEvent Parameters

Parameter	Mandatory	Parameter Definition
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.17.2 The KeyholeEndEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.18 Class CableWrapStartEvent

3.3.1.18.1 The CableWrapStartEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-21.

Table 3-21: Class CableWrapStartEvent Parameters

Parameter	Mandatory	Parameter Definition
wrapDirection	Y	(See table 3-31.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.18.2 The CableWrapStartEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.1.19 Class CableWrapEndEvent

3.3.1.19.1 The CableWrapEndEvent class shall include the parameters of the DefinedEvent abstract class (3.2.6) and the parameters listed in table 3-22.

Table 3-22: Class CableWrapEndEvent Parameters

Parameter	Mandatory	Parameter Definition
wrapDirection	Y	(See table 3-31.)
elevation	N	(See table 3-23.)
azimuth	N	(See table 3-24.)
rtlt	N	(See table 3-30.)
rangeRate	N	(See table 3-29.)

3.3.1.19.2 The CableWrapEndEvent class must contain one and only one of the following classes:

- PlanningInfoAperture class (see 3.2.10);
- PlanningInfoPosition class (see 3.2.11).

3.3.2 DISCUSSION—EVENT TYPES NOT DEFINED IN THIS ISSUE OF THE RECOMMENDED STANDARD

3.3.2.1 Event Type: DATARATE

The DATARATE event type, dealing with sustainable data rates and volume estimate events (see reference [E1], subsection 5.8), is not defined in this issue of the Recommended Standard.

3.3.2.2 Event Type: RFI

The RFI event type, dealing with predicted radio frequency interference events (see reference [E1], subsection 5.9), is not defined in this issue of the Recommended Standard.

3.3.2.3 Event Type: CONFLICTS

The CONFLICTS event type, dealing with predicted resource conflict events (see reference [E1], subsection 5.10), is not defined in this issue of the Recommended Standard.

3.3.2.4 Event Type: COSTS

The COSTS event type, dealing with cost estimates (see reference [E1], subsection 5.11), is not defined in this issue of the Recommended Standard.

3.3.2.5 Event Type: Other

The OTHER event type consists of those events that are not covered by the above definitions. No such events are defined in this Recommended Standard; however, this category is defined as it can be useful in the definition of additional events.

3.4 PARAMETERS

The various parameters used by the events defined in this Recommended Standard shall be as defined in tables 3-23–3-31.

Table 3-23: Parameter elevation Definition

Description	Data Type	Data Units
Elevation	xsd:float $-90.0 \leq \text{Elevation} < 90$	Degrees

Table 3-24: Parameter azimuth Definition

Description	Data Type	Data Units
Azimuth	xsd:float $0 \leq \text{Azimuth} < 360$	Degrees

Table 3-25: Parameter angle Definition

Description	Data Type	Data Units
Angle	xsd:float $0 \leq \text{Angle} < 180$	Degrees

Table 3-26: Parameter celestialBody Definition

Description	Data Type	Data Units
Celestial body	xsd:string—Permitted values are as follows: <ul style="list-style-type: none"> – Planet and Satellite Names—as per reference [2]; – Minor Planet Names—as per reference [2]. 	n/a

Table 3-27: Parameter occType Definition

Description	Data Type	Data Units
Occultation type	Enumeration The following values are permitted: <ul style="list-style-type: none"> – CELESTIALBODY – ATMOSPHERE – UMBRA – PENUMBRA 	n/a

Table 3-28: Parameter range Definition

Description	Data Type	Data Units
Range	xsd:double ≥ 0	Km

Table 3-29: Parameter rangeRate Definition

Description	Data Type	Data Units
Rate of change of range	xsd:double	m/s

Table 3-30: Parameter rttl Definition

Description	Data Type	Data Units
Round trip light time, that is, the time required for light to travel from the observer to the observed and back	xsd:double ≥ 0	Seconds

Table 3-31: Parameter wrapDirection Definition

Description	Data Type	Data Units
The direction in which the antenna wrap occurs	xsd:string—containing one of the following values: <ul style="list-style-type: none"> – Clockwise – n/a – Anticlockwise 	n/a

ANNEX A

IMPLEMENTATION CONFORMANCE STATEMENT (ICS) PROFORMA

(NORMATIVE)

A1 INTRODUCTION

A1.1 OVERVIEW

This annex provides the Implementation Conformance Statement (ICS) Requirements List (RL) for an implementation of the *Planning Information Formats Specification* (CCSDS 902.2-R-1). The ICS for an implementation is generated by completing the RL in accordance with the instructions below. An implementation shall satisfy the mandatory conformance requirements referenced in the RL.

The RL in this annex is a blank form. An implementation's completed RL is called the ICS. The ICS states which capabilities and options have been implemented. The following can use the ICS:

- the implementer, as a checklist to reduce the risk of failure to conform to the standard through oversight;
- a supplier or potential acquirer of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the standard ICS proforma;
- a user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation (it should be noted that, while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible ICSes);
- a tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A1.2 ABBREVIATIONS AND CONVENTIONS

A1.2.1 General

The RL consists of information in tabular form. The status of features is indicated using the abbreviations and conventions described below.

A1.2.2 Item Column

The item column contains sequential numbers for items in the table.

A1.2.3 Feature Column

The feature column contains a brief descriptive name for a feature. It implicitly means: ‘Is this feature supported by the implementation?’

NOTE – The features itemized in the RL are elements of the planning information format. Therefore support for a mandatory feature indicates that a generated file will include that feature, and support for an optional feature indicates that generated files can include that feature.

A1.2.4 Class Column/Parameters

The Class/Parameters column contains, when applicable, the planning information format class associated with the feature.

A1.2.5 Reference Column

The reference column indicates the relevant subsection or table in the *Planning Information Formats Specification* (CCSDS 902.2-R-1) (this document).

A1.2.6 Status Column

The status column uses the following notations:

M mandatory;

O optional.

It should be noted that a parameter may be marked as M while the class that contains it is marked O. This should be interpreted to mean that, while the class is optional, if it is present, then the parameter must be present.

A1.2.7 Support Column Symbols

The support column is to be used by the implementer to state whether a feature is supported by entering Y, N, or n/a, indicating:

Y Yes, supported by the implementation;

N No, not supported by the implementation;

n/a Not applicable.

A1.3 INSTRUCTIONS FOR COMPLETING THE RL

An implementer shows the extent of compliance to the Recommended Standard by completing the RL; that is, the state of compliance with all mandatory requirements and the options supported are shown. The resulting completed RL is called an ICS. The implementer shall complete the RL by entering appropriate responses in the support or values supported column, using the notation described in A1.2. If a conditional requirement is inapplicable, N/A should be used. If a mandatory requirement is not satisfied, exception information must be supplied by entering a reference Xi , where i is a unique identifier, to an accompanying rationale for the noncompliance.

A2 ICS PROFORMA FOR PLANNING INFORMATION FORMAT

A2.1 GENERAL INFORMATION

A2.1.1 Identification of ICS

Date of Statement (DD/MM/YYYY)	
ICS serial number	
System Conformance statement cross-reference	

A2.1.2 Identification of Implementation Under Test (IUT)

Implementation name	
Implementation version	
Special Configuration	
Other Information	

A2.1.3 Identification of Supplier

Supplier	
Contact Point for Queries	
Implementation Name(s) and Versions	
Other Information necessary for full identification, for example, names(s) and version(s) for machines and/or operating systems	

A2.1.4 Document Version

CCSDS 902.2-R-1	
Have any exceptions been required? Note: A YES answer means that the implementation does not conform to the Recommended Standard. Non-supported mandatory capabilities are to be identified in the ICS, with an explanation of why the implementation is non-conforming.	Yes _____ No _____

A2.1.5 Requirements List**A2.1.5.1 Class PlanningInfo****A2.1.5.1.1 General**

Item	Description	Ref.	Status	Support
1.	PlanningInfo	3.2.2	M	

A2.1.5.1.2 Class PlanningInfo Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
1.1.	Not applicable	Table 3-1	M	

A2.1.5.2 Class PlanningInfoHeader**A2.1.5.2.1 General**

Item	Description	Ref.	Status	Support
2.	PlanningInfoHeader	3.2.3	M	

A2.1.5.2.2 Class PlanningInfoHeader Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
2.1.	originatingOrganization	Table 3-1	M	
2.2.	generationTime	Table 3-1	M	
2.3.	version	Table 3-1	M	
2.4.	startTime	Table 3-1	M	
2.5.	endTime	Table 3-1	M	
2.6.	purpose	Table 3-1	O	
2.7.	description	Table 3-1	O	
2.8.	planningInfoStatus	Table 3-2	M	
2.9.	trajectoryXRef	Table 3-2	O	

A2.1.5.3 Class PlanningInfoData**A2.1.5.3.1 General**

Item	Description	Ref.	Status	Support
3.	PlanningInfoData	3.2.3	M	

A2.1.5.3.2 Class PlanningInfoData Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
3.1.	There are no parameters	n/a	n/a	n/a

A2.1.5.4 Class PlanningInfoTypeList**A2.1.5.4.1 General**

Item	Description	Ref.	Status	Support
4.	PlanningInfoTypeList	3.2.5	M	

A2.1.5.4.2 Class PlanningInfoTypeList Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
4.1.	planningInfoTypeList	Reference [4], Table 3-6	M	

A2.1.5.5 Class DefinedEvent**A2.1.5.5.1 General**

Item	Description	Reference	Status	Support
5.	DefinedEvent	3.2.6	O	

A2.1.5.5.2 Class DefinedEvent Parameters

Item	Parameter	Reference	Status	Item Support or Values Supported
5.1.	type	Reference [4], table 3-2	M	
5.2.	user	Reference [4], table 3-2	M	

Item	Parameter	Reference	Status	Item Support or Values Supported
5.3.	latestOffset	Reference [4], table 3-2	O	
5.4.	earliestOffset	Reference [4], table 3-2	O	
5.5.	identifier	Reference [4], table 3-2	O	

A2.1.5.6 Classes Derived from DefinedEvent of Type COMMS

A2.1.5.6.1 Class ElevationAscendingEvent

A2.1.5.6.1.1 General

Item	Description	Ref.	Status	Support
6.	ElevationAscendingEvent	3.2.6	O	

A2.1.5.6.1.2 Class ElevationAscendingEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
6.1.	type	Reference [4], table 3-2	M	
6.2.	user	Reference [4], table 3-2	M	
6.3.	latestOffset	Reference [4], table 3-2	O	
6.4.	earliestOffset	Reference [4], table 3-2	O	
6.5.	identifier	Reference [4], table 3-2	O	
6.6.	elevation	Table 3-23	M	
6.7.	azimuth	Table 3-24	O	
6.8.	rtlt	Table 3-30	O	
6.9.	rangeRate	Table 3-29	O	

A2.1.5.6.2 Class ElevationDescendingEvent

A2.1.5.6.2.1 General

Item	Description	Ref.	Status	Support
7.	ElevationDescendingEvent	3.2.6	O	

A2.1.5.6.2.2 Class ElevationDescendingEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
7.1.	type	Reference [4], table 3-2	M	
7.2.	user	Reference [4], table 3-2	M	
7.3.	latestOffset	Reference [4], table 3-2	O	
7.4.	earliestOffset	Reference [4], table 3-2	O	
7.5.	identifier	Reference [4], table 3-2	O	
7.6.	elevation	Table 3-23	M	
7.7.	azimuth	Table 3-24	O	
7.8.	rtlt	Table 3-30	O	
7.9.	rangeRate	Table 3-29	O	

A2.1.5.6.3 Class MaximumElevationEvent**A2.1.5.6.3.1 General**

Item	Description	Ref.	Status	Support
8.	MaximumElevationEvent	3.2.6	O	

A2.1.5.6.3.2 Class MaximumElevationEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
8.1.	type	Reference [4], table 3-2	M	
8.2.	user	Reference [4], table 3-2	M	
8.3.	latestOffset	Reference [4], table 3-2	O	
8.4.	earliestOffset	Reference [4], table 3-2	O	
8.5.	identifier	Reference [4], table 3-2	O	
8.6.	elevation	Table 3-23	M	
8.7.	azimuth	Table 3-24	O	
8.8.	rtlt	Table 3-30	O	
8.9.	rangeRate	Table 3-29	O	

A2.1.5.6.4 Class OccultationStartEvent**A2.1.5.6.4.1 General**

Item	Description	Ref.	Status	Support
9.	OccultationStartEvent	3.2.6	O	

A2.1.5.6.4.2 Class OccultationStartEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
9.1.	type	Reference [4], table 3-2	M	
9.2.	user	Reference [4], table 3-2	M	
9.3.	latestOffset	Reference [4], table 3-2	O	
9.4.	earliestOffset	Reference [4], table 3-2	O	
9.5.	identifier	Reference [4], table 3-2	O	
9.6.	celestialBody	Table 3-26	M	
9.7.	occType	Table 3-27	O	
9.8.	elevation	Table 3-23	O	
9.9.	azimuth	Table 3-24	O	
9.10.	rtlt	Table 3-30	O	
9.11.	rangeRate	Table 3-29	O	

A2.1.5.6.5 Class OccultationEndEvent**A2.1.5.6.5.1 General**

Item	Description	Ref.	Status	Support
10.	OccultationEndEvent	3.2.6	O	

A2.1.5.6.5.2 Class OccultationEndEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
10.1.	type	Reference [4], table 3-2	M	
10.2.	user	Reference [4], table 3-2	M	

Item	Parameter	Ref.	Status	Item Support or Values Supported
10.3.	latestOffset	Reference [4], table 3-2	O	
10.4.	earliestOffset	Reference [4], table 3-2	O	
10.5.	identifier	Reference [4], table 3-2	O	
10.6.	celestialBody	Table 3-26	M	
10.7.	occType	Table 3-27	O	
10.8.	elevation	Table 3-23	O	
10.9.	azimuth	Table 3-24	O	
10.10.	rtlt	Table 3-30	O	
10.11.	rangeRate	Table 3-29	O	

A2.1.5.6.6 Class SunAlignmentAngleEvent

A2.1.5.6.6.1 General

Item	Description	Ref.	Status	Support
11.	SunAlignmentAngleEvent	3.2.6	O	

A2.1.5.6.6.2 Class SunAlignmentAngleEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
11.1.	type	Reference [4], table 3-2	M	
11.2.	user	Reference [4], table 3-2	M	
11.3.	latestOffset	Reference [4], table 3-2	O	
11.4.	earliestOffset	Reference [4], table 3-2	O	
11.5.	identifier	Reference [4], table 3-2	O	
11.6.	angle	Table 3-25	M	
11.7.	elevation	Table 3-23	O	
11.8.	azimuth	Table 3-24	O	
11.9.	rtlt	Table 3-30	O	
11.10.	rangeRate	Table 3-29	O	

A2.1.5.6.7 Class RangeEvent**A2.1.5.6.7.1 General**

Item	Description	Ref.	Status	Support
12.	RangeEvent	3.2.6	O	

A2.1.5.6.7.2 Class RangeEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
12.1.	type	Reference [4], table 3-2	M	
12.2.	user	Reference [4], table 3-2	M	
12.3.	latestOffset	Reference [4], table 3-2	O	
12.4.	earliestOffset	Reference [4], table 3-2	O	
12.5.	identifier	Reference [4], table 3-2	O	
12.6.	range	Table 3-28	M	
12.7.	elevation	Table 3-23	O	
12.8.	azimuth	Table 3-24	O	
12.9.	rtlt	Table 3-30	O	
12.10.	rangeRate	Table 3-29	O	

A2.1.5.6.8 Class RangeRateEvent**A2.1.5.6.8.1 General**

Item	Description	Ref.	Status	Support
13.	RangeRateEvent	3.2.6	O	

A2.1.5.6.8.2 Class RangeRateEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
13.1.	type	Reference [4], table 3-2	M	
13.2.	user	Reference [4], table 3-2	M	
13.3.	latestOffset	Reference [4], table 3-2	O	

Item	Parameter	Ref.	Status	Item Support or Values Supported
13.4.	earliestOffset	Reference [4], table 3-2	O	
13.5.	identifier	Reference [4], table 3-2	O	
13.6.	rangeRate	Table 3-29	M	
13.7.	elevation	Table 3-23	O	
13.8.	azimuth	Table 3-24	O	
13.9.	rtlt	Table 3-30	O	

A2.1.5.6.9 Class RtlEvent

A2.1.5.6.9.1 General

Item	Description	Ref.	Status	Support
14.	RtlEvent	3.2.6	O	

A2.1.5.6.9.2 Class RtlEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
14.1.	type	Reference [4], table 3-2	M	
14.2.	user	Reference [4], table 3-2	M	
14.3.	latestOffset	Reference [4], table 3-2	O	
14.4.	earliestOffset	Reference [4], table 3-2	O	
14.5.	identifier	Reference [4], table 3-2	O	
14.6.	rtlt	Table 3-30	M	
14.7.	elevation	Table 3-23	O	
14.8.	azimuth	Table 3-24	O	
14.9.	rangeRate	Table 3-29	O	

A2.1.5.6.10 Class RetComsStartEvent

A2.1.5.6.10.1 General

Item	Description	Ref.	Status	Support
15.	RetComsStartEvent	3.2.6	O	

A2.1.5.6.10.2 Class RetComsStartEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
15.1.	type	Reference [4], table 3-2	M	
15.2.	user	Reference [4], table 3-2	M	
15.3.	latestOffset	Reference [4], table 3-2	O	
15.4.	earliestOffset	Reference [4], table 3-2	O	
15.5.	identifier	Reference [4], table 3-2	O	
15.6.	elevation	Table 3-23	O	
15.7.	azimuth	Table 3-24	O	
15.8.	rtlt	Table 3-30	O	
15.9.	rangeRate	Table 3-29	O	

A2.1.5.6.11 Class RetComsEndEvent**A2.1.5.6.11.1 General**

Item	Description	Ref.	Status	Support
16.	RetComsEndEvent	3.2.6	O	

A2.1.5.6.11.2 Class RetComsEndEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
16.1.	type	Reference [4], table 3-2	M	
16.2.	user	Reference [4], table 3-2	M	
16.3.	latestOffset	Reference [4], table 3-2	O	
16.4.	earliestOffset	Reference [4], table 3-2	O	
16.5.	identifier	Reference [4], table 3-2	O	
16.6.	elevation	Table 3-23	O	
16.7.	azimuth	Table 3-24	O	
16.8.	rtlt	Table 3-30	O	
16.9.	rangeRate	Table 3-29	O	

A2.1.5.6.12 Class FwdComsStartEvent**A2.1.5.6.12.1 General**

Item	Description	Ref.	Status	Support
17.	FwdComsStartEvent	3.2.6	O	

A2.1.5.6.12.2 Class FwdComsStartEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
17.1.	type	Reference [4], table 3-2	M	
17.2.	user	Reference [4], table 3-2	M	
17.3.	latestOffset	Reference [4], table 3-2	O	
17.4.	earliestOffset	Reference [4], table 3-2	O	
17.5.	identifier	Reference [4], table 3-2	O	
17.6.	elevation	Table 3-23	O	
17.7.	azimuth	Table 3-24	O	
17.8.	rtlt	Table 3-30	O	
17.9.	rangeRate	Table 3-29	O	

A2.1.5.6.13 Class FwdComsEndEvent**A2.1.5.6.13.1 General**

Item	Description	Ref.	Status	Support
18.	Class FwdComsEndEvent	3.2.6	O	

A2.1.5.6.13.2 Class FwdComsEndEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
18.1.	type	Reference [4], table 3-2	M	
18.2.	user	Reference [4], table 3-2	M	
18.3.	latestOffset	Reference [4], table 3-2	O	

Item	Parameter	Ref.	Status	Item Support or Values Supported
18.4.	earliestOffset	Reference [4], table 3-2	O	
18.5.	identifier	Reference [4], table 3-2	O	
18.6.	elevation	Table 3-23	O	
18.7.	azimuth	Table 3-24	O	
18.8.	rtlt	Table 3-30	O	
18.9.	rangeRate	Table 3-29	O	

A2.1.5.6.14 Class KeyholeStartEvent

A2.1.5.6.14.1 General

Item	Description	Ref.	Status	Support
19.	KeyholeStartEvent	3.2.6	O	

A2.1.5.6.14.2 Class KeyholeStartEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
19.1.	type	Reference [4], table 3-2	M	
19.2.	user	Reference [4], table 3-2	M	
19.3.	latestOffset	Reference [4], table 3-2	O	
19.4.	earliestOffset	Reference [4], table 3-2	O	
19.5.	identifier	Reference [4], table 3-2	O	
19.6.	elevation	Table 3-23	O	
19.7.	azimuth	Table 3-24	O	
19.8.	rtlt	Table 3-30	O	
19.9.	rangeRate	Table 3-29	O	

A2.1.5.6.15 Class KeyholeEndEvent

A2.1.5.6.15.1 General

Item	Description	Ref.	Status	Support
20.	KeyholeEndEvent	3.2.6	O	

A2.1.5.6.15.2 Class KeyholeEndEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
20.1.	type	Reference [4], table 3-2	M	
20.2.	user	Reference [4], table 3-2	M	
20.3.	latestOffset	Reference [4], table 3-2	O	
20.4.	earliestOffset	Reference [4], table 3-2	O	
20.5.	identifier	Reference [4], table 3-2	O	
20.6.	elevation	Table 3-23	O	
20.7.	azimuth	Table 3-24	O	
20.8.	rtlt	Table 3-30	O	
20.9.	rangeRate	Table 3-29	O	

A2.1.5.6.16 Class CableWrapStartEvent**A2.1.5.6.16.1 General**

Item	Description	Ref.	Status	Support
21.	CableWrapStartEvent	3.2.6	O	

A2.1.5.6.16.2 Class CableWrapStartEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
21.1.	type	Reference [4], table 3-2	M	
21.2.	user	Reference [4], table 3-2	M	
21.3.	latestOffset	Reference [4], table 3-2	O	
21.4.	earliestOffset	Reference [4], table 3-2	O	
21.5.	identifier	Reference [4], table 3-2	O	
21.6.	wrapDirection	table 3-31	M	
21.7.	elevation	Table 3-23	O	
21.8.	azimuth	Table 3-24	O	
21.9.	rtlt	Table 3-30	O	
21.10.	rangeRate	Table 3-29	O	

A2.1.5.6.17 Class CableWrapEndEvent**A2.1.5.6.17.1 General**

Item	Description	Ref.	Status	Support
22.	CableWrapEndEvent	3.2.6	O	

A2.1.5.6.17.2 Class CableWrapEndEvent Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
22.1.	type	Reference [4], table 3-2	M	
22.2.	user	Reference [4], table 3-2	M	
22.3.	latestOffset	Reference [4], table 3-2	O	
22.4.	earliestOffset	Reference [4], table 3-2	O	
22.5.	identifier	Reference [4], table 3-2	O	
22.6.	wrapDirection	Table 3-31	M	
22.7.	elevation	Table 3-23	O	
22.8.	azimuth	Table 3-24	O	
22.9.	rtlt	Table 3-30	O	
22.10.	rangeRate	Table 3-29	O	

A2.1.5.7 Classes Derived from DefinedEvent of Type DATARATE

No classes derived from DefinedEvent of type DATARATE are defined in the issue of the Recommended Standard.

A2.1.5.8 Classes Derived from DefinedEvent of Type RFI

No classes derived from DefinedEvent of type RFI are defined in the issue of the Recommended Standard.

A2.1.5.9 Classes Derived from DefinedEvent of Type CONFLICTS

No classes derived from DefinedEvent of type CONFLICTS are defined in the issue of the Recommended Standard.

A2.1.5.10 Classes Derived from DefinedEvent of Type COSTS

No classes derived from DefinedEvent of type COSTS are defined in the issue of the Recommended Standard.

A2.1.5.11 Classes Derived from AdditionalEvent

The AdditionalEvents class may be used to permit the instantiation of additional events that are not defined in this Recommended Standard. For each class derived from the AdditionalEvent class, a section of the following format shall be specified:

A2.1.5.11.1 Class NameOfAdditionalEvent

A2.1.5.11.1.1 General

<i>Item</i>	<i>Description</i>	<i>Ref.</i>	<i>Status</i>	<i>Support</i>
23.	<i>NameOfAddtitionalEvent</i>	3.2.6	O	

A2.1.5.11.1.2 Class NameOfAdditionalEvent Parameters

<i>Item</i>	<i>Parameter</i>	<i>Ref.</i>	<i>Status</i>	<i>Item Support or Values Supported</i>
23.1.	<i>type</i>	<i>Reference [4], table 3-2</i>	<i>M</i>	
23.2.	<i>user</i>	<i>Reference [4], table 3-2</i>	<i>M</i>	
23.3.	<i>latestOffset</i>	<i>Reference [4], table 3-2</i>	<i>O</i>	
23.4.	<i>earliestOffset</i>	<i>Reference [4], table 3-2</i>	<i>O</i>	
23.5.	<i>identifier</i>	<i>Reference [4], table 3-2</i>	<i>O</i>	
23.6.	<i>newParameter1</i>	<i>Table A-1</i>		
23.7.	<i>newParameter2</i>	<i>Table A-1</i>		
23.8.	<i>...</i>	<i>...</i>	<i>...</i>	

NOTE – Parameters *type*, *user*, *latestOffset*, and *earliestOffset* are inherited from the AdditionalEvent abstract class.

Table A-1: Parameters Created for NameOfAdditionalEvent Class Definition

<i>Parameter</i>	<i>Description</i>	<i>Data Type</i>	<i>Data Units</i>
<i>newParameter1</i>	<i>Purpose of the parameter</i>		

<i>Parameter</i>	<i>Description</i>	<i>Data Type</i>	<i>Data Units</i>
<i>newParameter2</i>	<i>Purpose of the parameter</i>		
...

A2.1.5.12 Class SrvMgtEventTime

A2.1.5.12.1 General

Item	Description	Ref.	Status	Support
24.	SrvMgtEventTime	Ref. [4] 3.2.3	O	

A2.1.5.12.2 Class SrvMgtEventTime Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
24.1.	epochTimeSystem	Reference [4], table 3-3	M	
24.2.	absoluteTime	Reference [4], table 3-3	M	

A2.1.5.13 Additional Parameters defined by using Classes instantiated from AbstractParameter Class

If additional parameters for classes PlanningInfoHeader, PlanningInfoData, or any of the classes derived from DefinedEvent or AdditionalEvent are specified by using one of the classes instantiated from class AbstractParameter (i.e., classes BooleanParameter, UnsignedInParameter, IntParameter, FloatParameter, DoubleParameter, StringParameter, ExtendedParameter, DurationParameter, TimeParameterA, or TimeParameterB), the additional parameters and permitted values for these should be specified as in tables A-2–A-5, below.

In the following tables, the columns have the following use:

- Name This column is used to specify the names of the additional parameter(s).
- Description This column is used to enter the description of what the additional parameter(s) is(are).

- Type This column is used to specify what type the parameter is, for example, String, Integer, Unsigned Integer, Float, or CCSDS ASCII Time Code B.
- Permitted Values This column is used to specify the values that are permitted for the additional parameter(s).
- Data units This column is used to specify the Data Unit of the additional parameter(s), for example, Seconds, Hertz, Volts, or UTC.

Table A-2: AbstractParameter Class Instantiated for PlanningInfoHeader Class

Name	Description	Type	Permitted Values	Data units

Table A-3: AbstractParameter Class Instantiated for PlanningInfoData Class

Name	Description	Type	Permitted Values	Data units

Table A-4: AbstractParameter Class Instantiated for Classes Derived from DefinedEvent Class

Additional Parameters for Class ...				
Name	Description	Type	Permitted Values	Data units

Table A-5: AbstractParameter Class Instantiated for Classes Derived from AdditionalEvent Class

Additional Parameters for Class ...				
Name	Description	Type	Permitted Values	Data units

A2.1.5.14 Class ApertureLocation**A2.1.5.14.1 General**

Item	Description	Ref.	Status	Support
25.	ApertureLocation	3.2.9	O	

A2.1.5.14.2 Class ApertureLocation Parameters

[n/a]

A2.1.5.15 Class ApertureReference**A2.1.5.15.1 General**

Item	Description	Ref.	Status	Support
26.	ApertureReference	3.2.10	O	

A2.1.5.15.2 Class ApertureReference Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
26.1.	apertureRef	Reference [4], table 3-4	M	
26.2.	siteRef	Reference [4], table 3-4	M	

A2.1.5.16 Class ApertureCelestialBodyPosition**A2.1.5.16.1 General**

Item	Description	Ref.	Status	Support
27.	ApertureCelestialBodyPosition	3.2.11	O	

A2.1.5.16.2 Class ApertureCelestialBodyPosition Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
27.1.	celestialBody	Reference [4], table 3-5	M	
27.2.	celestialBodyLat	Reference [4], table 3-5	M	

Item	Parameter	Ref.	Status	Item Support or Values Supported
27.3.	celestialBodyLong	Reference [4], table 3-5	M	
27.4.	celestialBodyAltitude	Reference [4], table 3-5	O	
27.5.	apertureName	Reference [4], table 3-5	O	

A2.1.5.17 Class PlanningInfoEventAssociation

A2.1.5.17.1 General

Item	Description	Ref.	Status	Support
28.	PlanningInfoEventAssociation	3.2.12	M	

A2.1.5.17.2 Class PlanningInfoEventAssociation Parameters

Item	Parameter	Ref.	Status	Item Support or Values Supported
28.1.	associationId	Table 3-3	M	
28.2.	planningInfoAssnKind	Table 3-3	M	
28.3.	comment	Table 3-3	O	
28.4.	eventIdRef	Table 3-3	M	

ANNEX B

SECURITY, SANA, AND PATENT CONSIDERATIONS

(INFORMATIVE)

B1 SECURITY CONSIDERATIONS

B1.1 OVERVIEW

This annex presents the results of an analysis of security considerations applied to the technologies specified in this Recommended Standard.

B1.2 CONSEQUENCES OF NOT APPLYING SECURITY TO THE TECHNOLOGY

The consequences of not applying security to the systems and networks on which this Recommended Standard is implemented could include potential loss, corruption, and theft of data. Since it is possible to utilize these messages in preparing and disseminating schedules relating to the availability of communications and tracking resources for spacecraft, the consequences of not applying security to the systems and networks on which this Recommended Standard is implemented could include compromise or loss of the mission if malicious tampering of a particularly severe nature occurs.

B1.3 POTENTIAL THREATS AND ATTACK SCENARIOS

Potential threats or attack scenarios include, but are not limited to, (a) unauthorized access to the programs/processes that generate and interpret the messages and (b) unauthorized access to the messages during transmission between exchange partners. Protection from unauthorized access during transmission is especially important if the mission utilizes open ground networks such as the Internet to provide ground station connectivity for the exchange of data formatted in compliance with this Recommended Standard. It is strongly recommended that potential threats or attack scenarios applicable to the systems and networks on which this Recommended Standard is implemented be addressed by the management of those systems and networks and by the utilization of adequate authentication, suitable protocols, and secured interfaces for the exchange of this information.

B1.4 SECURITY CONCERNS RELATED TO THIS RECOMMENDED STANDARD

B1.4.1 Data Privacy

Privacy of data formatted in compliance with the specifications of this Recommended Standard should be assured by the systems and networks on which this Recommended Standard is implemented.

B1.4.2 Data Integrity

Integrity of data formatted in compliance with the specifications of this Recommended Standard should be assured by the systems and networks on which this Recommended Standard is implemented.

B1.4.3 Authentication of Communicating Entities

Authentication of communicating entities involved in the transport of data that complies with the specifications of this Recommended Standard should be provided by the systems and networks on which this Recommended Standard is implemented.

B1.4.4 Data Transfer between Communicating Entities

The transfer of data formatted in compliance with this Recommended Standard between communicating entities should be accomplished via secure mechanisms approved by the Information Technology Security functionaries of exchange participants.

B1.4.5 Control of Access to Resources

Control of access to resources should be managed by the systems upon which provider formatting and recipient processing are performed.

B1.4.6 Auditing of Resource Usage

Auditing of resource usage should be handled by the management of systems and networks on which this Recommended Standard is implemented.

B1.5 UNAUTHORIZED ACCESS

Unauthorized access to the programs/processes that generate and interpret the messages should be prohibited in order to minimize potential threats and attack scenarios.

B1.6 DATA SECURITY IMPLEMENTATION SPECIFICS

Specific information-security interoperability provisions that apply between agencies and other independent users involved in an exchange of data formatted in compliance with this Recommended Standard should be specified in an ICD.

B2 SANA CONSIDERATIONS

B2.1 GENERAL

The recommendations of this document rely on the SANA registries described below. New assignments in these registries, in conformance with the policies identified, will be available at the SANA registry Web site: <http://sanaregistry.org>. Therefore the reader shall look at the SANA Web site for all assignments contained in these registries.

B2.2 REGISTRY FOR originatingOrganization

(See subsection A2.2 in reference [4].)

B2.3 REGISTRY FOR user

(See subsection A2.3 in reference [4].)

B2.4 REGISTRY FOR siteRef AND apertureRef

(See subsection A2.4 in reference [4].)

B2.5 REGISTRY FOR PlanningInfoAssnKinds

SANA is requested to register and maintain `PlanningInfoAssnKinds` (`PlanningInfoEventAssociation` class—see table 3-3) values in a registry located at:

[http://sanaregistry.org/r/\[location to be determined\]](http://sanaregistry.org/r/[location to be determined])

In accordance with reference [7], subsection 3.11 (c), updates to this registry are to be at the discretion of CCSDS member agencies or registered organizations, via the registered agency or organization representative.

B2.6 REGISTRY FOR XML SCHEMA

The XML Schema for this Recommended Standard is registered with SANA and is located at:

http://sanaregistry.org/r/service_management_xml_schemas/

Per reference [6], updates of this type of registry are performed by CCSDS.

B2.7 USE OF UNREGISTERED VALUES

Only values that have been registered should be used for the `originatingOrganization`, `user`, `siteRef`, and `apertureRef` parameters. Unregistered values for the `originatingOrganization`, `user`, `siteRef`, and `apertureRef` parameters may be used. If unregistered values are used, they should be prefixed with the string 'UNR::'.

NOTES

- 1 'UNR::' indicates an unregistered value;
- 2 this helps eliminate potential confusion in a multi-agency cross support context;
- 3 use of unregistered values is not recommended and should be avoided if possible.

B3 PATENT CONSIDERATIONS

No patent rights are known to adhere to any of the specifications of the Recommended Standard.

ANNEX C

XML SCHEMA ORGANIZATION, PACKAGING, AND EXAMPLES FOR THE PLANNING INFORMATION FORMATS

(INFORMATIVE)

C1 PURPOSE

This annex provides information regarding the XML Schema Organization and packaging. Examples of the planning information are also given.

C2 SCHEMA ORGANIZATION AND PACKAGING

The normative planning information schema types and global elements are contained in the file '902x02w0_22-SchemaCsmPlanningInformationFormats.xsd'.

The planning information types and global elements are registered in the 'urn:ccsds:schema:csm:1.0.0' name space.

The planning information schema includes the following schemas:

a) 902x12w0_04-SchemaCsmSmAbstractEvent.xsd

Types and global elements in this schema are registered in the 'urn:ccsds:schema:csm:1.0.0' name space.

b) 902x12w0_04-SchemaCsmSmCommonClasses.xsd

Types and global elements in this schema are registered in the 'urn:ccsds:schema:csm:1.0.0' name space.

c) 902x12w0_04-SchemaCsmSmInfoEntityHeader.xsd

Types and global elements in this schema are registered in the 'urn:ccsds:schema:csm:1.0.0' name space.

The source of the following schema files,

902x02w0_22-SchemaCsmPlanningInformationFormats.xsd,

is the SANA SCCS-SM Information Entity XML Schemas registry:

http://sanaregistry.org/r/service_management_xml_schemas/902Schema/902x02

The source of the following schema files,

- 902x12w0_04-SchemaCsmSmAbstractEvent.xsd,
- 902x12w0_04-SchemaCsmSmCommonClasses.xsd, and
- 902x12w0_04-SchemaCsmSmInfoEntityHeader.xsd,

is the SANA SCCS-SM Information Entity XML Schemas registry:

http://sanaregistry.org/r/service_management_xml_schemas/902Schema/902x13

C3 EXAMPLES

C3.1 OVERVIEW

The following subsections give examples of using the planning information format.

C3.2 EXAMPLE OF PLANNING INFORMATION

The following is a listing of planning information that does not use extensions or additional events.

```
<?xml version="1.0" encoding="UTF-8"?>
<planningInfo xmlns="urn:ccsds:schema:cissm:1.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xmi="http://www.omg.org/XMI"
  xsi:schemaLocation="urn:ccsds:schema:cissm:1.0.0 902x02w0_21-
SchemaCissmPlanningInformationFormats.xsd" >

  <planningInfoHeader originatingOrganization="ESOC"
    generationTime="2018-045T10:05:00.000Z"
    version="1"
    startTime="2018-050T00:00:00.000Z"
    endTime="2018-055T00:00:00.000Z"
    purpose="Purpose of the planning information..."
    description="Schedule description..." status="TEST">
    <typeOfPlanningInfo type="COMMS" />
  </planningInfoHeader>

  <planningInfoData>

    <elevationAscendingEvent type="COMMS"
      user="MEX"
      elevation="0.0" >
      <srvMgtEventTime absoluteTime="2018-048T00:10:00Z" epochTimeSystem="UTC" />
      <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </elevationAscendingEvent>

    <retComsStartEvent type="COMMS"
      user="MEX" >
      <srvMgtEventTime absoluteTime="2018-048T00:30:00Z" epochTimeSystem="UTC" />
      <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </retComsStartEvent>

    <fwdComsStartEvent type="COMMS"
      user="MEX" >
      <srvMgtEventTime absoluteTime="2018-048T00:50:00Z" epochTimeSystem="UTC" />
      <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
  </planningInfoData>
</planningInfo>
```

```
</fwdComsStartEvent>

<maximumElevationEvent type="COMMS"
    user="MEX"
    elevation="65.4" >
    <srvMgtEventTime absoluteTime="2018-048T03:00:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</maximumElevationEvent>

<cableWrapStartEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="60.0"
    rttl="2400.0">
    <srvMgtEventTime absoluteTime="2018-048T04:00:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</cableWrapStartEvent>

<cableWrapEndEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="59.5"
    rttl="2400.0">
    <srvMgtEventTime absoluteTime="2018-048T04:02:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</cableWrapEndEvent>

<fwdComsEndEvent type="COMMS"
    user="MEX" >
    <srvMgtEventTime absoluteTime="2018-048T05:10:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</fwdComsEndEvent>

<retComsEndEvent type="COMMS"
    user="MEX" >
    <srvMgtEventTime absoluteTime="2018-048T05:30:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</retComsEndEvent>

<elevationDescendingEvent type="COMMS"
```

```

        user="MEX"
        elevation="0.0" >
    <srvMgtEventTime absoluteTime="2018-048T05:50:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1" />
</elevationDescendingEvent>

<elevationAscendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="NewNorcia_ViewPeriod_000_Event_00">
    <srvMgtEventTime absoluteTime="2018-050T00:10:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1" />
</elevationAscendingEvent>

<retComsStartEvent type="COMMS"
    user="MEX"
    identifier="NewNorcia_ViewPeriod_000_Event_01">
    <srvMgtEventTime absoluteTime="2018-050T00:30:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1" />
</retComsStartEvent>

<elevationAscendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="FutureMarsRover_ViewPeriod_000_Event_00">
    <srvMgtEventTime absoluteTime="2018-050T00:45:00Z" epochTimeSystem="UTC" />
    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.0"
    celestialBodyLong="45.0" apertureName="FutureMarsRover_Aperture" />
</elevationAscendingEvent>

<retComsStartEvent type="COMMS"
    user="MEX"
    identifier="FutureMarsRover_ViewPeriod_000_Event_01">
    <srvMgtEventTime absoluteTime="2018-050T00:46:00Z" epochTimeSystem="UTC" />
    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.0"
    celestialBodyLong="45.0" apertureName="FutureMarsRover_Aperture" />
</retComsStartEvent>

<fwdComsStartEvent type="COMMS"
    user="MEX"
    identifier="FutureMarsRover_ViewPeriod_000_Event_02">
    <srvMgtEventTime absoluteTime="2018-050T00:47:00Z" epochTimeSystem="UTC" />

```

```

    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.0"
    celestialBodyLong="45.0" apertureName="FutureMarsRover_Aperture"/>
  </fwdComsStartEvent>

  <fwdComsStartEvent type="COMMS"
    user="MEX"
    identifier="NewNorcia_ViewPeriod_000_Event_02">
    <srvMgtEventTime absoluteTime="2018-050T00:50:00Z" epochTimeSystem="UTC"/>
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>
  </fwdComsStartEvent>

  <fwdComsEndEvent type="COMMS"
    user="MEX"
    identifier="FutureMarsRover_ViewPeriod_000_Event_03">
    <srvMgtEventTime absoluteTime="2018-050T00:58:00Z" epochTimeSystem="UTC"/>
    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.00000001"
    celestialBodyLong="45.00000002" apertureName="FutureMarsRover_Aperture"/>
  </fwdComsEndEvent>

  <retComsEndEvent type="COMMS"
    user="MEX"
    identifier="FutureMarsRover_ViewPeriod_000_Event_04">
    <srvMgtEventTime absoluteTime="2018-050T00:59:00Z" epochTimeSystem="UTC"/>
    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.00000001"
    celestialBodyLong="45.00000002" apertureName="FutureMarsRover_Aperture"/>
  </retComsEndEvent>

  <elevationDescendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="FutureMarsRover_ViewPeriod_000_Event_05">
    <srvMgtEventTime absoluteTime="2018-050T01:00:00Z" epochTimeSystem="UTC"/>
    <apertureCelestialBodyPosition celestialBody="Mars" celestialBodyLat="33.00000001"
    celestialBodyLong="45.00000002" apertureName="FutureMarsRover_Aperture"/>
  </elevationDescendingEvent>

  <maximumElevationEvent type="COMMS"
    user="MEX"
    elevation="65.4"
    identifier="NewNorcia_ViewPeriod_000_Event_03">
    <srvMgtEventTime absoluteTime="2018-050T03:00:00Z" epochTimeSystem="UTC"/>
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>

```

```
</maximumElevationEvent>

<cableWrapStartEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="60.0"
    rslt="2400.0"
    identifier="NewNorcia_ViewPeriod_000_Event_04">
  <srvMgtEventTime absoluteTime="2018-050T04:00:00Z" epochTimeSystem="UTC" />
  <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>
</cableWrapStartEvent>

<cableWrapEndEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="59.5"
    rslt="2400.0"
    identifier="NewNorcia_ViewPeriod_000_Event_05">
  <srvMgtEventTime absoluteTime="2018-050T04:02:00Z" epochTimeSystem="UTC" />
  <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>
</cableWrapEndEvent>

<fwdComsEndEvent type="COMMS"
    user="MEX"
    identifier="NewNorcia_ViewPeriod_000_Event_06">
  <srvMgtEventTime absoluteTime="2018-050T05:10:00Z" epochTimeSystem="UTC" />
  <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>
</fwdComsEndEvent>

<retComsEndEvent type="COMMS"
    user="MEX"
    identifier="NewNorcia_ViewPeriod_000_Event_07">
  <srvMgtEventTime absoluteTime="2018-050T05:30:00Z" epochTimeSystem="UTC" />
  <apertureReference siteRef="New Norcia" apertureRef="Aperture_1"/>
</retComsEndEvent>

<elevationDescendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="NewNorcia_ViewPeriod_000_Event_08">
```

```

    <srvMgtEventTime absoluteTime="2018-050T05:50:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1" />
</elevationDescendingEvent>

<elevationAscendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="Cebreros_ViewPeriod_000_Event_00">
    <srvMgtEventTime absoluteTime="2018-052T00:10:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="New Norcia" apertureRef="Aperture_1" />
</elevationAscendingEvent>

<retComsStartEvent type="COMMS"
    user="MEX"
    identifier="Cebreros_ViewPeriod_000_Event_01">
    <srvMgtEventTime absoluteTime="2018-052T00:30:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1" />
</retComsStartEvent>

<fwdComsStartEvent type="COMMS"
    user="MEX"
    identifier="Cebreros_ViewPeriod_000_Event_02">
    <srvMgtEventTime absoluteTime="2018-052T00:50:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1" />
</fwdComsStartEvent>

<maximumElevationEvent type="COMMS"
    user="MEX"
    elevation="65.4"
    identifier="Cebreros_ViewPeriod_000_Event_03">
    <srvMgtEventTime absoluteTime="2018-052T03:00:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1" />
</maximumElevationEvent>

<cableWrapStartEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="60.0"
    rtlt="2400.0"
    identifier="Cebreros_ViewPeriod_000_Event_04">
    <srvMgtEventTime absoluteTime="2018-052T04:00:00Z" epochTimeSystem="UTC" />

```



```

    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1"/>
</cableWrapStartEvent>

<cableWrapEndEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    azimuth="234.5"
    elevation="59.5"
    rslt="2400.0"
    identifier="Cebreros_ViewPeriod_000_Event_05">
    <srvMgtEventTime absoluteTime="2018-052T04:02:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1"/>
</cableWrapEndEvent>

<fwdComsEndEvent type="COMMS"
    user="MEX"
    identifier="Cebreros_ViewPeriod_000_Event_06">
    <srvMgtEventTime absoluteTime="2018-052T05:10:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1"/>
</fwdComsEndEvent>

<retComsEndEvent type="COMMS"
    user="MEX"
    identifier="Cebreros_ViewPeriod_000_Event_07">
    <srvMgtEventTime absoluteTime="2018-052T05:30:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1"/>
</retComsEndEvent>

<elevationDescendingEvent type="COMMS"
    user="MEX"
    elevation="0.0"
    identifier="Cebreros_ViewPeriod_000_Event_08">
    <srvMgtEventTime absoluteTime="2018-052T05:50:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Cebreros" apertureRef="Aperture_1"/>
</elevationDescendingEvent>

<planningInfoEventAssociation associationKind="ViewPeriod"
    associationId="FutureMarsRover_ViewPeriod_000"
    comment="This is an example Event Association illustrating its use for View
Periods...">
    <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_00" />
    <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_01" />

```

```

        <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_02" />
        <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_03" />
        <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_04" />
        <eventRef ref="FutureMarsRover_ViewPeriod_000_Event_05" />
    </planningInfoEventAssociation>

    <planningInfoEventAssociation associationKind="ViewPeriod"
        associationId="NewNorcia_ViewPeriod_000"
        comment="This is an example Event Association illustrating its use for View
Periods...">
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_00" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_01" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_02" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_03" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_04" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_05" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_06" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_07" />
        <eventRef ref="NewNorcia_ViewPeriod_000_Event_08" />
    </planningInfoEventAssociation>

    <planningInfoEventAssociation associationKind="ViewPeriod"
        associationId="Cebreros_ViewPeriod_000"
        comment="This is an example Event Association illustrating its use for View
Periods...">
        <eventRef ref="Cebreros_ViewPeriod_000_Event_00" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_01" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_02" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_03" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_04" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_05" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_06" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_07" />
        <eventRef ref="Cebreros_ViewPeriod_000_Event_08" />
    </planningInfoEventAssociation>

</planningInfoData>
</planningInfo>

```

C3.3 PLANNING INFORMATION WITH ADDITIONAL EVENTS

C3.3.1 General

The following is an example of planning information with additional events and the extra schema required for this to function.

C3.3.2 Example of Planning Information with Additional Events

The following is an example of a listing of planning information with additional events:

```
<?xml version="1.0" encoding="UTF-8"?>
<planningInfo xmlns="urn:ccsds:schema:cissm:1.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xmi="http://www.omg.org/XMI"
  xsi:schemaLocation="urn:ccsds:schema:cissm:1.0.0 Example-
SchemaPlanningInformationAdditionalEventExample.xsd" >

  <planningInfoHeader originatingOrganization="ESOC"
    generationTime="2018-045T10:05:00.000Z"
    version="1"
    startTime="2018-050T00:00:00.000Z"
    endTime="2018-055T00:00:00.000Z"
    purpose="Purpose of the planning information..."
    description="Schedule description..." status="TEST">
    <typeOfPlanningInfo type="COMMS" />
    <typeOfPlanningInfo type="OTHER" />
  </planningInfoHeader>

  <planningInfoData>

    <elevationAscendingEvent type="COMMS"
      user="MEX"
      elevation="0.0"
      rangeRate="12345.67" >
      <srvMgtEventTime absoluteTime="2018-048T00:10:00Z" epochTimeSystem="UTC" />
      <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </elevationAscendingEvent>

    <retComsStartEvent type="COMMS"
```

```

        user="MEX" >
        <srvMgtEventTime absoluteTime="2018-048T00:30:00Z" epochTimeSystem="UTC" />
        <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
</retComsStartEvent>

<fwdComsStartEvent type="COMMS"
    user="MEX" >
    <srvMgtEventTime absoluteTime="2018-048T00:50:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
</fwdComsStartEvent>

<maximumElevationEvent type="COMMS"
    user="MEX"
    elevation="65.4" >
    <srvMgtEventTime absoluteTime="2018-048T03:00:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
</maximumElevationEvent>

<cableWrapStartEvent type="COMMS"
    user="MEX"
    wrapDirection="Clockwise"
    rtlt="2400.0">
    <srvMgtEventTime absoluteTime="2018-048T04:00:00Z" epochTimeSystem="UTC" />
    <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
</cableWrapStartEvent>

<anExampleAdditionalEvent user="MEX"
    Example-Parameter2="0.98765"
    Example-Parameter1="321"
    Example-Using-Defined-Parameter-elevation="45.0"
    type="OTHER">
    <srvMgtEventTime absoluteTime="2018-048T04:00:30Z" epochTimeSystem="UTC" />
</anExampleAdditionalEvent>

<a2ndExampleAdditionalEvent user="MEX"
    Example-Parameter3="Example string parameter"
    Example-Using-Defined-Parameter-elevation="54.0"
    type="OTHER"
    latestOffset="10.0"
    earliestOffset="-10.0">

```

```

        <srvMgtEventTime absoluteTime="2018-048T04:01:30Z" epochTimeSystem="UTC" />
        <relativeToTimeB absoluteTime="2018-222T00:00:00Z" epochTimeSystem="TIA" relativeEventTime="0.0" />
    </a2ndExampleAdditionalEvent>

    <cableWrapEndEvent type="COMMS"
        user="MEX"
        wrapDirection="Clockwise"
        azimuth="234.5"
        elevation="59.5"
        rslt="2400.0">
        <srvMgtEventTime absoluteTime="2018-048T04:02:00Z" epochTimeSystem="UTC" />
        <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </cableWrapEndEvent>

    <fwdComsEndEvent type="COMMS"
        user="MEX" >
        <srvMgtEventTime absoluteTime="2018-048T05:10:00Z" epochTimeSystem="UTC"/>
        <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </fwdComsEndEvent>

    <retComsEndEvent type="COMMS"
        user="MEX" >
        <srvMgtEventTime absoluteTime="2018-048T05:30:00Z" epochTimeSystem="UTC"/>
        <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </retComsEndEvent>

    <elevationDescendingEvent type="COMMS"
        user="MEX"
        elevation="0.0" >
        <srvMgtEventTime absoluteTime="2018-048T05:50:00Z" epochTimeSystem="UTC"/>
        <apertureReference siteRef="Malargüe" apertureRef="Aperture_1"/>
    </elevationDescendingEvent>

</planningInfoData>
</planningInfo>

```

C3.3.3 Example of Planning Information with Additional Events—Extra Schema

The following is an example of a listing of the extra schema required for planning information with additional events:

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<xsd:schema xmlns="urn:ccsds:schema:cissm:1.0.0" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:ccsds:schema:cissm:1.0.0" elementFormDefault="qualified"
attributeFormDefault="unqualified" version="1.0.0">
  <xsd:include schemaLocation="902x02w0_21-SchemaCissmPlanningInformationFormats.xsd"/>

<!--
*****
***** -->
<!-- Define additional events -->
<!--
*****
***** -->

  <xsd:element name="anExampleAdditionalEvent" type="AnExampleAdditionalEventType"
substitutionGroup="srvMgtAbstractEvent"/>
  <xsd:complexType name="AnExampleAdditionalEventType">
    <xsd:complexContent>
      <xsd:extension base="SrvMgtAbstractAdditionalEventType">
        <xsd:attribute name="Example-Parameter1" type="xsd:integer" use="required"/>
        <xsd:attribute name="Example-Parameter2" type="xsd:double" use="required"/>
        <xsd:attribute name="Example-Using-Defined-Parameter-elevation" type="ElevationType"
use="required"/>
        <xsd:attribute name="Example-Using-Defined-Parameter-azimuth" type="AzimuthType"
use="optional"/>
        <xsd:attribute name="Example-Using-Defined-Parameter-rtlt" type="RtltType" use="optional"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>

  <xsd:element name="a2ndExampleAdditionalEvent" type="A2ndExampleAdditionalEventType"
substitutionGroup="srvMgtAbstractEvent"/>
  <xsd:complexType name="A2ndExampleAdditionalEventType">
    <xsd:complexContent>
      <xsd:extension base="SrvMgtAbstractAdditionalEventType">
        <xsd:sequence>
```

```
        <!-- allow an Event time of type RelativeToTimeBType -->
        <xsd:element ref="relativeToTimeB" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="Example-Parameter3" type="xsd:string" use="required"/>
    <xsd:attribute name="Example-Using-Defined-Parameter-elevation" type="ElevationType"
use="required"/>
    <xsd:attribute name="Example-Using-Defined-Parameter-azimuth" type="AzimuthType"
use="optional"/>
    <xsd:attribute name="Example-Using-Defined-Parameter-rtlt" type="RtltType" use="optional"/>
    </xsd:extension>
</xsd:complexContent>
</xsd:complexType>

</xsd:schema>
```

ANNEX D

ABBREVIATIONS AND ACRONYMS

(INFORMATIVE)

ASCII	American Standard Code for Information Interchange
CCSDS	Consultative Committee on Space Data Systems
ICD	Interface Control Document
n/a	not applicable
OMG	Object Management Group
SANA	Space Assigned Numbers Authority
UML	Unified Modelling Language
UTC	Coordinated Universal Time
W3C	World Wide Web Consortium
XML	eXtensible Markup Language

ANNEX E

INFORMATIVE REFERENCES

(INFORMATIVE)

- [E1] *Extensible Space Communication Cross Support—Service Management—Concept*. Issue 1. Report Concerning Space Data System Standards (Green Book), CCSDS 902.0-G-1. Washington, D.C.: CCSDS, September 2014.
- [E2] *Space Communication Cross Support—Service Management—Operations Concept*. Issue 1-S. Report Concerning Space Data System Standards (Historical), CCSDS 910.14-G-1-S. Washington, D.C.: CCSDS, (May 2011) June 2017.