

CCSDS Historical Document

This document's Historical status indicates that it is no longer current. It has either been replaced by a newer issue or withdrawn because it was deemed obsolete. Current CCSDS publications are maintained at the following location:

<http://public.ccsds.org/publications/>


**CONSULTATIVE
COMMITTEE FOR
SPACE DATA SYSTEMS**

RECOMMENDATION FOR SPACE
DATA SYSTEM STANDARDS:

**PACKET
TELEMETRY**

"BLUE BOOK"

MAY 1984

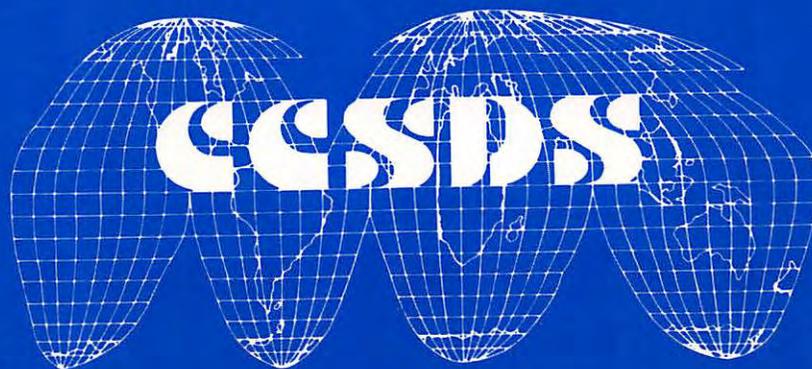


**CONSULTATIVE
COMMITTEE FOR
SPACE DATA SYSTEMS**

RECOMMENDATION FOR SPACE
DATA SYSTEM STANDARDS:

**PACKET
TELEMETRY**

"BLUE BOOK"

MAY 1984

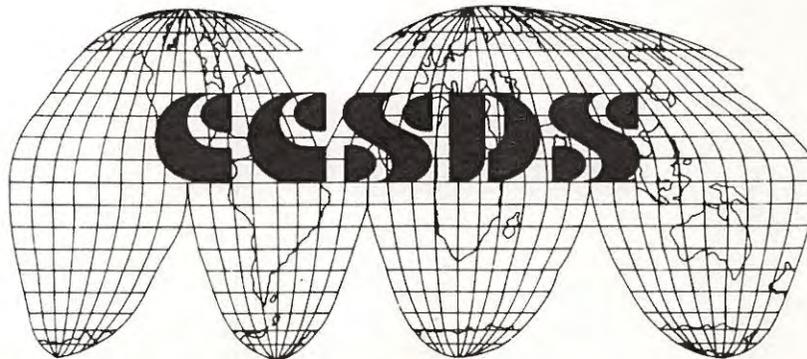

DEDICATION

This document is dedicated to the memory of Mr. Michel F. Pellet of the European Space Agency. His vision and leadership were an inspiration to many technical personnel who contributed to this Recommendation. He will be deeply missed by many members of the CCSDS, and by all people who value the increased international understanding which is achieved through cooperation in the peaceful scientific exploration of space.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

AUTHORITY

```
*****  
*                                                                 *  
* Issue:                Blue Book, Issue-1.                    *  
* Date:                 May 1984.                               *  
* Location:             CCSDS Plenary Meeting,                  *  
*                       May 1984,                               *  
*                       Tokyo, Japan.                           *  
*                                                                 *  
*****
```

This Recommendation reflects the consensus technical agreement of the following member Agencies of the Consultative Committee for Space Data Systems (CCSDS):

- o Centre National D'Etudes Spatiales (CNES)/France.
- o Deutsche Forschungs-u. Versuchsanstalt fuer Luft und Raumfahrt e.V (DFVLR)/West Germany.
- o European Space Agency (ESA)/Europe.
- o Indian Space Research Organization (ISRO)/India.
- o Instituto de Pesquisas Espaciais (INPE)/Brazil.
- o National Aeronautics and Space Administration (NASA)/USA.
- o National Space Development Agency of Japan (NASDA)/Japan.

The following observer Agencies also concur with this Recommendation:

- o Department of Communications, Communications Research Centre (DOC-CRC)/Canada.
- o Institute of Space and Astronautical Science (ISAS)/Japan.
- o Radio Research Laboratories (RRL)/Japan.

This Recommendation is published and maintained by:

CCSDS Secretariat
Communications and Data Systems Division
Code-TS
National Aeronautics and Space Administration
Washington
DC 20546
USA

STATEMENT OF INTENT

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of seven member space Agencies. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **RECOMMENDATIONS** and are not considered binding on any Agency.

This **RECOMMENDATION** is issued by, and represents the consensus of, the CCSDS Plenary body. Agency endorsement of this **RECOMMENDATION** is entirely voluntary. Endorsement, however, indicates the following understandings:

- o Whenever an Agency establishes a CCSDS-related **STANDARD**, this **STANDARD** will be in accord with the relevant **RECOMMENDATION**. Establishing such a **STANDARD** does not preclude other provisions which an Agency may develop.
- o Whenever an Agency establishes a CCSDS-related **STANDARD**, the Agency will provide other CCSDS member Agencies with the following information:
 - The **STANDARD** itself.
 - The anticipated date of initial operational capability.
 - The anticipated duration of operational service.
- o Specific service arrangements shall be made via memoranda of agreement. Neither this **RECOMMENDATION** nor any ensuing **STANDARD** is a substitute for a memorandum of agreement.

No later than five years from its date of issuance, this Recommendation will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or, (3) be retired or cancelled.

FOREWORD

This document is a technical Recommendation for use in developing packetized telemetry systems and has been prepared by the Consultative Committee for Space Data Systems (CCSDS). The Packet Telemetry concept described herein is the baseline concept for spacecraft-to-ground data communication within missions that are cross-supported between Agencies of the CCSDS.

This Recommendation establishes a common framework and provides a common basis for the data structures of spacecraft telemetry streams. It allows implementing organizations within each Agency to proceed coherently with the development of compatible derived Standards for the flight and ground systems that are within their cognizance. Derived Agency Standards may implement only a subset of the optional features allowed by the Recommendation and may incorporate features not addressed by the Recommendation.

Through the process of normal evolution, it is expected that expansion, deletion or modification to this document may occur. This Recommendation is therefore subject to CCSDS document management and change control procedures which are defined in Reference [1].

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

DOCUMENT CONTROL

<u>Issue</u>	<u>Title</u>	<u>Date</u>	<u>Status/Remarks</u>
1	Recommendation for Space Data Systems Standards: Packet Telemetry.	May 1984	Original Issue

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

CONTENTS

<u>Sections</u>		<u>Page</u>
	REFERENCES.....	vii
1	INTRODUCTION.....	1-1
	1.1 PURPOSE.....	1-1
	1.2 SCOPE.....	1-1
	1.3 APPLICABILITY.....	1-2
	1.4 BIT NUMBERING CONVENTION AND NOMENCLATURE.....	1-3
2	OVERVIEW.....	2-1
3	SOURCE PACKET FORMAT.....	3-1
	3.1 PRIMARY HEADER.....	3-2
	3.2 SECONDARY HEADER.....	3-5
	3.3 SOURCE DATA.....	3-6
	3.4 PACKET ERROR CONTROL	3-6
4	PACKET SEGMENTATION.....	4-1
	4.1 SOURCE-INTERNAL SEGMENTATION.....	4-2
	4.2 SPACECRAFT SEGMENTATION USING SOURCE PACKETS....	4-2
	4.3 SPACECRAFT SEGMENTATION USING TELEMETRY SEGMENTS.	4-3
5	TRANSFER FRAME FORMAT.....	5-1
	5.1 ATTACHED FRAME SYNCHRONIZATION MARKER.....	5-3
	5.2 TRANSFER FRAME PRIMARY HEADER.....	5-4
	5.3 TRANSFER FRAME SECONDARY HEADER.....	5-12
	5.4 TRANSFER FRAME DATA FIELD.....	5-13
	5.5 TRANSFER FRAME TRAILER.....	5-13
 <u>Figures</u>		
2-1	TELEMETRY DATA FLOW.....	2-2
3-1	VERSION 1 SOURCE PACKET FORMAT.....	3-1
4-1	VERSION 2 TELEMETRY SEGMENT FORMAT.....	4-3
4-2	EXAMPLE OF THE SEGMENTATION PROCESS.....	4-6
5-1	COMPOSITE VERSION 1 TRANSFER FRAME/REED-SOLOMON CODEBLOCK FORMAT.....	5-2
5-2	VERSION 1 TRANSFER FRAME HEADER FORMAT.....	5-5
 <u>Annexes</u>		
A	TRANSFER FRAME ERROR DETECTION ENCODING/DECODING GUIDELINE.....	A-1
B	TRANSFER FRAME SYNCHRONIZATION MARKER.....	B-1
C	SOURCE PACKET SECONDARY HEADER FORMAT GUIDELINE.....	C-1
D	SOURCE PACKET ERROR DETECTION ENCODING/DECODING GUIDELINE.....	D-1
E	"APPLICATION NOTES" FOR PACKET TELEMETRY.....	E-1
F	RATIONALE FOR PACKET TELEMETRY.....	F-1
G	SUMMARY OF SEGMENTATION OPTIONS.....	G-1

REFERENCES

- [1] "Procedures Manual for the Consultative Committee for Space Data Systems", CCSDS Document, May 1984 or later issue.
- [2] "Recommendation for Space Data System Standards: Telemetry Channel Coding", CCSDS Blue Book, May 1984 or later issue.
- [3] "Recommendation for Space Data System Standards: Telecommand, Part-2: Transfer Frame Formats and Procedures", CCSDS document, April 1984 or later issue.
- [4] "Recommendation for Space Data System Standards: Time Code Formats", CCSDS document, February 1984 or later issue.

The latest issues of these documents may be obtained from the CCSDS Secretariat at the address indicated on Page-ii.

1 INTRODUCTION

1.1 PURPOSE

The purpose of this document is to establish a common Recommendation for the implementation of spacecraft "Packet Telemetry" systems by the Agencies participating in the Consultative Committee for Space Data Systems (CCSDS).

1.2 SCOPE

Packet Telemetry is a concept which facilitates the transmission of space-acquired data from source to user in a standardized and highly automated manner. Packet Telemetry provides a mechanism for implementing common data structures and protocols which may enhance the development and operation of space mission systems.

This Recommendation addresses the following two processes:

- (1) The end-to-end transport of space mission data sets from source application processes located in space to distributed user application processes located on the ground.
- (2) The intermediate transfer of these data sets through space data acquisition networks, which contain spacecraft, radio links, tracking stations, ground communications circuits and mission control centers as some of their components.

This Recommendation is limited to describing the telemetry formats which are generated by the spacecraft in order to execute its role in the above processes. The jointly-agreed CCSDS channel coding mechanisms required to implement space-to-ground data links of acceptable quality are defined in Reference [2]. This Recommendation therefore contains specifications for the following data structures:

- (a) A **SOURCE PACKET**, which provides protocol data formatting services so that data may be exchanged between a source application process in space and its associated user application process(es) on the ground. The Source Packet format is defined in Section 3. Optional **SEGMENTATION** data structures are also described which permit very long Source Packets to be reformatted into shorter data units. The Segmentation options are defined in Section 4.

- (b) A **TRANSFER FRAME**, which facilitates movement of the packetized or segmented source data through the spacecraft-to-ground communications path. As an alternative to Segmentation, the Transfer Frame also provides a mechanism to time-share the data link between sources by creating logical **VIRTUAL CHANNELS**. The Transfer Frame format is defined in Section 5.

1.3 APPLICABILITY

This Recommendation applies to the future exchange of Packet Telemetry between CCSDS Agencies in cross-support situations. The Recommendation includes comprehensive specification of the structure of data streams that are generated by remote space vehicles for telemetering to space mission data processing facilities (which are usually located on Earth). The Recommendation does not attempt to define the architecture or configuration of these data processing facilities, except to describe assumed ground data handling services which affect the selection of certain onboard formatting options.

The Recommendation specifies a wide range of formatting capabilities which may facilitate a high degree of flexibility in the design of spacecraft data acquisition systems; however, compatibility with the Packet Telemetry concept may be realized by only implementing a narrow subset of these capabilities. Some "Application Notes" which discuss how different levels of compatibility may be achieved are included in Annex E.

2 OVERVIEW

Figure 2-1 is a functional diagram of the telemetry data flow from the creation of a data set by an application process operating within a spacecraft "source" (instrument or subsystem), through to the delivery of the same data set to a user "sink" (application process) on the ground. Since many of the elements of this flow are presently mission unique, a primary objective of Packet Telemetry is to define stable, mission-independent interface standards for the communications paths within the flow.

Data structures within a packet telemetry system are provided:

- (a) To allow the user to optimize the size and structure of his application data set with a minimum of constraints imposed by the spacecraft-to-ground transport system. The user should thus be able to define his data organization independently of other users and to adapt this organization to the various modes of his experiment.

The data structure which enables this independence is the telemetry **Source Packet**. User data are encapsulated within a packet by prefacing them with a standard label or "primary header", which is used by the data transport system to route the data through the system. A secondary header structure is provided which enables more application-unique specification of the user data.

- (b) To allow the ground data acquisition system to capture the packets in a standardized way, with a data-independent method of performing packet reassembly and determination of data quality. The data structure within the packet telemetry system for achieving this is the **Transfer Frame**, which provides the necessary header elements for extracting packets or segments from the frame and allows optional error-detection coding for deciding whether the frame handling process was error free.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

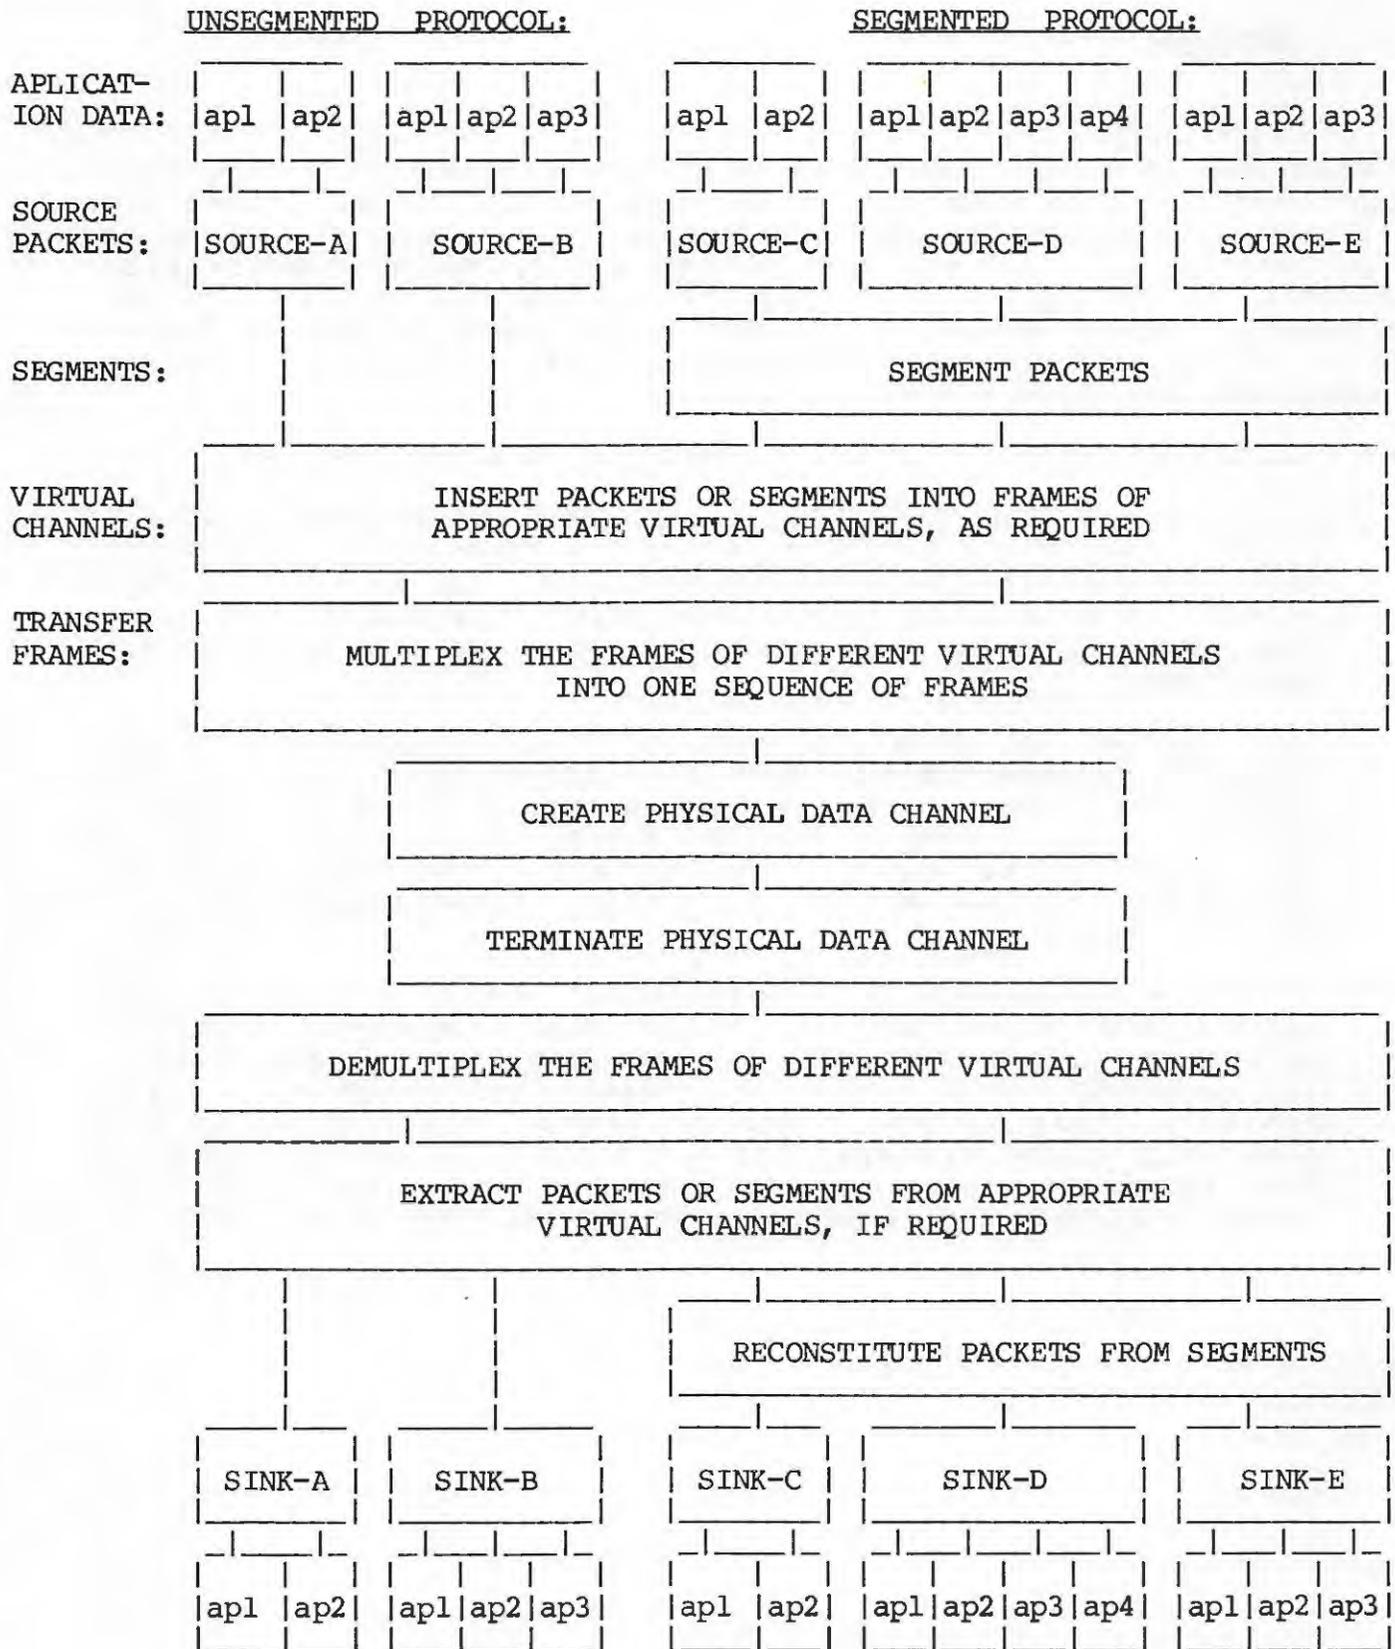


FIGURE 2-1: TELEMETRY DATA FLOW

- (c) To allow the spacecraft terminus of the data transport system to be designed and tested without a detailed definition of all user data organizations. This is particularly important since at the time of specifying the onboard spacecraft data system design this knowledge is usually not available from the experimenter, and attempts to force an early agreement with present systems often lead to non-optimum fixed-format telemetry design.

Since most space communications systems are capacity-limited, multiple users must be guaranteed access to the downlink data channel. It is therefore important for the spacecraft to be able to manage the data flow to the ground in an orderly manner. For example, users who generate long packets could, if allowed unrestricted access, monopolize the channel for long periods of time, forcing increased buffer capacity and response time for other users. This problem is solved by permitting two methods for controlling data flow, namely:

- (i) Virtual Channelization: This is a logical mechanism that allows sources which generate very long packets to be "virtually" given exclusive access to the physical data channel by assigning them transmission capacity on a frame-by-frame basis. The data structure used to implement this feature is the **"Virtual Channel"**.

Virtual channelization will normally be used to separate sources of very different characteristics. For example, if a payload contains an imaging instrument which produces a regular scan line packet containing many thousands of bits, and a number of processor-based experiments which aperiodically generate smaller packets of processed data, a possible system architecture would be to assign the imaging instrument to one virtual channel and to handle the rest by segmentation or direct multiplexing on a second virtual channel.

- (ii) Segmentation: Several optional mechanisms exist for transmitting long source packets as a series of shorter packets or segments, thus avoiding exclusive capture of the channel by one source. Within one option a formal data structure is introduced to implement this feature: this is the **"Telemetry Segment"**.

"Application Notes", which describe how compatibility with these various data structures may be achieved, are presented in Annex E. Key elements of the rationale behind Packet Telemetry are presented in Annex F.

3 SOURCE PACKET FORMAT

A Source Packet encapsulates a block of observational and ancillary application data which is to be transmitted from a data source in space to a source analysis facility on the ground.

The Source Packet structure permits future "versions" of the data structure to be defined, if required. The Version 1 Source Packet format, which is shown in Figure 3-1, consists of the following four major fields:

<u>Major Field</u>	<u>Length (bits)</u>
Primary Header	48
Secondary Header	Variable (optional)
Source Data	Variable
Packet Error Control	16 (optional)

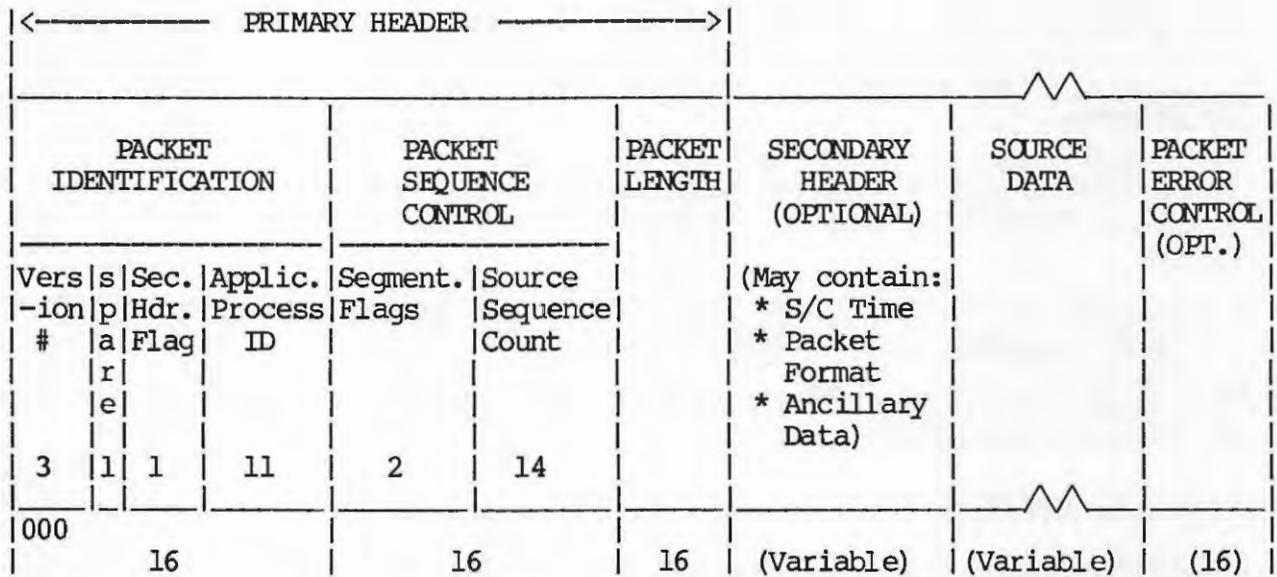


FIGURE 3-1: VERSION 1 "SOURCE PACKET" FORMAT

3.1 PRIMARY HEADER

The primary header consists of 48 bits subdivided into the following fields:

<u>Field</u>	<u>Length (bits)</u>
PACKET IDENTIFICATION	16
- Version Number (3)	
- Reserved Spare (1)	
- Secondary Header Flag (1)	
- Application Process ID (11)	
PACKET SEQUENCE CONTROL	16
- Segmentation Flags (2)	
- Source Sequence Count (14)	
PACKET LENGTH	16
	--
	48

3.1.1 Packet Identification (16 bits). This 16-bit field is separated into four subfields:

(a) Version Number (Bits 0 through 2).

The Version Number occupies the three most significant bits of the packet Primary Header. By changing the Version Number, future variations of the Source Packet structure become possible. **AT PRESENT, ONLY TWO VERSIONS OF THE PACKET ARE PERMITTED:**

* "Version 1" (Bits 0-2 = 000) is the complete telemetry Source Packet format, which is described in the remainder of Section 3.

* "Version 2" (Bits 0-2 = 100) is the Telemetry Segment format, which is described in Section 4.

FOR VERSION 1, THE REMAINDER OF THE SOURCE PACKET FORMAT IS DEFINED AS FOLLOWS:

(b) Reserved Spare (Bit 3).

This single bit is reserved for future application. At present, it shall be set to "0".

(c) Secondary Header Flag (Bit 4).

This 1-bit flag signals the presence (Bit 4 = 1) or absence (Bit 4 = 0) of a Secondary Header data structure within the Source Packet.

(d) Application Process ID (Bits 5 through 15).

This 11-bit field uniquely identifies the individual application process within a particular space vehicle which created the Source Packet. (Note: the space vehicle itself is identified by the Spacecraft Identifier in the Transfer Frame header.) The Application Process ID's are tailored to local mission needs and are therefore assigned by the Mission Manager. Guidelines for assigning Application Process ID's may be developed by the CCSDS. Users should note that ground data accounting considerations may limit the number of different application processes which may be simultaneously "open" during a given session.

The "all ones" configuration of the Application Process ID shall be reserved to identify "Idle Packets", which are generated by the spacecraft data system to maintain synchronism of the ground packet extraction process during periods when no sources have packetized data available for transfer to the ground.

3.1.2 Packet Sequence Control (16 bits). This 16-bit field is separated into two fields:

(a) Segmentation Flags (Bits 0,1).

The Segmentation Flags, which occupy the two most-significant bits of the 16-bit field, are used to indicate the status of long message-oriented Source Packets that have been broken into shorter communications-oriented segments. Various optional processes for segmentation are described in Section 4. The assignment of the flags is as follows:

(i) Last Segment Flag (Bit 0).

When Bit 0 is set to a "1", this indicates that the remainder of the data structure contains the last segment of a long segmented Source Packet.

(ii) First Segment Flag (Bit 1).

When Bit 1 is set to a "1", this indicates that the remainder of the data structure contains the first segment of a long segmented Source Packet.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

The Segmentation Flags are thus interpreted as follows:

Bit-0:	Bit-1:	Interpretation:
0	0	Continuation Segment
0	1	First Segment
1	0	Last Segment
1	1	Unsegmented Packet

Note: When a source does not perform segmentation, it shall set the flags to "11" before passing the packet to the spacecraft data handling system for transfer to the ground.

(b) Source Sequence Count (Bits 2 through 15).

This 14-bit field contains a straight sequential count (modulo 16384) of each packet generated by each unique source application process on the spacecraft. The purpose of the field is to associate this packet with other packets from the same application process, even though their natural order may have been disturbed during transport to the user's processor on the ground. The field will normally be used in conjunction with the spacecraft measurement time code to provide completely unambiguous association; it is therefore essential that the period of the Source Sequence Count should be sufficiently long that the time code increments at least once between successive recycling of the sequence count. For continuous operation of a source application process, it is not permissible to "short cycle" the sequence count before the full counter accumulation has been reached; however, if a source's operation is interrupted (e.g. by loss of power), the source may start a new sequence count.

3.1.3 Packet Length (16 bits). This field contains a sequential 16-bit binary count "C" of the length (in octets) of the remainder of the data structure which is enclosed between the first bit of the Secondary Header and the last bit of the packet (i.e. the last bit of the Source Data field, or the last bit of the Error Control field if this option is selected). The field is expressed as follows:

$$C = \{ (\text{Number of octets}) - 1 \}$$

Users should recognize that although very long packets are permissible, these present special problems in terms of data link monopolization, source data buffering, and network accountability during transfer across the unique channel from the spacecraft to the ground. As described in Section 4, large packets (i.e. packets which are very much longer than the data space within the Transfer Frame) may either be segmented by the transfer network or may be assigned to individual "Virtual Channels". It is anticipated that for a large number of applications, packet lengths in the range of approximately 1 to 8 kilobits will be chosen by instrument designers for flight operations. Very short packets (less than 1024-bits) become inefficient and will normally only be used by very low-rate data sources, for engineering tests and checkout, and for fill.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

For flight operations, computational speed considerations within the ground data processing elements of the transfer network may dictate that there is a maximum incoming packet rate which can be handled. This may mean that the network implementation organizations within each Agency will specify a minimum size for small packets (e.g "Idle Packets") which are transmitted contiguously.

From the viewpoint of ground data processing efficiency, it is strongly recommended that the overall packet length should be an even number of octets.

3.2 SECONDARY HEADER

The purpose of the Secondary Header is to provide a standard means for encoding within a Source Packet any ancillary data (time, internal data field format, spacecraft position/attitude, etc.) which may be necessary for the interpretation of the information contained within the packet. The presence or absence of a Secondary Header is signalled by the Secondary Header Flag within the Packet Identification field, as described in Section 3.1.1 (c). If present, the Secondary Header will contain data generated by one or more onboard application processes.

Short-term packet management processes within the ground network, such as extracting and delivering individual packets to a user in near-real time, may be able to use only the sequence count field within the packet header for accounting purposes. However, for longer-term services to be provided (e.g archiving, sorting, processing and correlation with other data sets) the sequence count must be concatenated with a "time" field in order to unambiguously identify a packet. For users needing these long-term services, it is a requirement that the Secondary Header must be present in every packet produced by the source and must contain a time code which is registered with respect to some known event encoded within the Source Data section of the packet, accurate to the time resolution required for the Source Data interpretation and association.

The length of the Secondary Header shall always occur in integral multiples of octets. Guidelines for formatting the Secondary Header are presented in Annex C.

3.3 SOURCE DATA

The Source Data field contains the measurement information generated by the primary application process operating within each source. The only formal restriction imposed on the Source Data field is that the total length of this section must be an integral number of octets; otherwise, the experimenter will normally have complete freedom to specify the data content and the internal format of this field. However, users are cautioned that if the packet contents are to be processed within CCSDS Agency support facilities, then local standards for internal formatting may be imposed.

3.4 PACKET ERROR CONTROL (Optional)

At the discretion of the user, an optional error detection code may be appended to the packet in order to verify that the overall integrity of the message has been preserved during the transport process. In those configurations where the supporting Agency agrees to check the Packet Error Control code associated with a particular application process, the field shall be present in every packet produced by that application process, shall be 16-bits long and the recommended encoding polynomial is specified in Annex D; otherwise, the selection of the encoding polynomial, and the length of the field, is left to the user or to local Agency standards. The presence or absence of packet error control will be implied by the Application Process ID.

4 **PACKET SEGMENTATION**

The recommendations for Source Packet formatting permit a wide range of packet lengths to be implemented. Furthermore, sources may conceptually vary the packet length on a dynamic basis, according to the message formatting needs of different application processes operating within the source.

Space communications systems are usually heavily driven by the bandwidth or capacity constraints of the unique data channel which connects the spacecraft to the ground. Since multiple users must share this communications channel, flow control becomes critical to ensure that all sources have access to this common resource for periods of time consistent with their delivery timeliness requirements and their capacity to buffer data while other sources are being serviced. Very long Source Packets therefore present a flow control problem since they may monopolize the channel for unacceptable periods of time and may force other sources to implement unreasonably large local buffering.

Several mechanisms are provided for solving this flow control problem within Packet Telemetry systems. One involves assigning long-packet generating sources to their own "Virtual Channel" by inserting them into dedicated types of Transfer Frames. These dedicated frames may then be interleaved with other frames containing multi-user data which are formatted into mutually compatible packet sizes. This Virtual Channel solution is discussed in Section 5.

Another mechanism involves the use of various "segmentation" protocols whereby the spacecraft data handling system (or the source itself) breaks the long packets into shorter pieces which are compatible with the flow control requirements of other users. The long-packet source will therefore either be responsible for performing its own communications-oriented segmentation or for buffering its own data while the spacecraft breaks the packet up into smaller segments and interleaves them with similar-sized segments of data from other sources for transfer to the ground.

This issue of the Packet Telemetry Recommendation permits the system designer to select between three valid methods of segmentation:

1. Segmentation by the source application process, using the standard Version 1 "Source Packet" data structure (Section 4.1).
2. Segmentation by the spacecraft data system, using the standard Version 1 "Source Packet" data structure (Section 4.2).
3. Segmentation by the spacecraft data system, using the standard Version 2 "Telemetry Segment" data structure (Section 4.3).

These three methods are discussed below. Virtual Channelization is discussed in Section 5. The attributes of all four methods are summarized in Annex-G. Selection of the specific option(s) which will be cross-supported by CCSDS Agencies will be defined within the detailed cross-support agreements.

4.1 SOURCE-INTERNAL SEGMENTATION.

A first option is for the source application process to be constrained by the system designer to always generate packets which are short enough to ensure that no flow control problems can exist when they are integrated with packets from other onboard sources; however, this may artificially constrain the measurement acquisition processes by locking them to the communication processes. For instance, an imaging scan line may be a "natural" packet for an instrument, but it may be too long to transmit unsegmented.

A second option is to allow the source application process to format measurement data into very long packets in accordance with sampling needs, but to require that the source interface electronics breaks them into shorter segments prior to delivery to the spacecraft data system. This may be accomplished by having the source reformat the long Version 1 packets into shorter Version 1 packets within which the Segmentation Flags (Section 3.1.2a) are manipulated to signal a first, continuing, or last segment of the larger packet entity. Within this option, the "Source Sequence Count" field must increment once for each segment generated and the "Packet Length" field must directly indicate the length of the segment; therefore, information which describes the Sequence Count and Length of the original large packet should be encoded within the data field of at least the first segment.

4.2 SPACECRAFT SEGMENTATION USING SOURCE PACKETS.

A third option exists whereby the spacecraft data system implements one or more special internal application processes which are dedicated to the task of segmenting long packets from onboard sources. Within this option, the entire user packet is recursively treated as "data" in a new Version 1 packet, which bears Packet Identification, Packet Sequence Control and Packet Length fields that are unique to the spacecraft data system application process which performs the segmentation. In this case, the Segmentation Flags (Section 3.1.2 a) of the new packet shall be manipulated to signal a first, continuing or last segment of the original user packet. This solution introduces a modest amount of extra overhead, since the first segment in such a system will contain the Primary Header of the spacecraft data system segmentation process, followed by the complete Primary Header of the packet which is being segmented.

4.3 SPACECRAFT SEGMENTATION USING "TELEMETRY SEGMENTS".

All three of the above options for segmentation utilize the Version 1 Source Packet format, within which the "length" field is always interpreted as the length in octets of the data unit (packet or segment) that appears on the downlink and the "sequence count" increments once per data unit that is transmitted from a given application process. A fourth option exists, using "Version 2" of the packet format (see Section 3.1.1a), within which the "length" field in the data unit defines the length of an original packet that remains to be transmitted and the "sequence count" is static since it refers to the numbering of the original packet by the application process. The length and sequence count of the data unit being transmitted are therefore semantically different between the two versions, since these parameters are implied when using Version 2.

The Version 2 "Telemetry Segment" structure is shown in Figure 4-1:

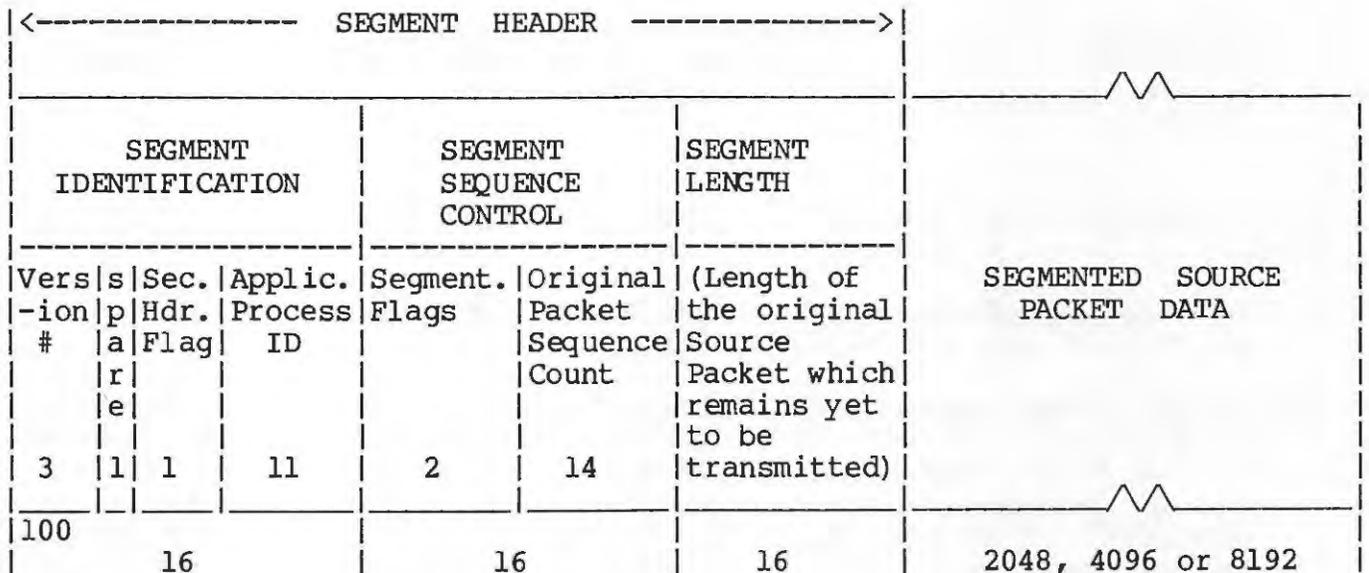


FIGURE 4-1: VERSION 2 "TELEMETRY SEGMENT" FORMAT

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

The semantic definition of the Version 2 "Segment Header" differs from the Version 1 (Source Packet) "Primary Header" in two important ways:

1. The Packet Sequence Count field is static within all the segments associated with a long packet which is being segmented since it contains the count of the original packet.
2. The Segment Length field does not indicate the length of the segment, but instead indicates the length of data from the original long packet (including that contained within the segment) which remains yet to be transmitted. The length of the segment is fixed and is specified externally.

The length of the segment of data from the original Source Packet which is being transmitted ("LSEGMENT", in octets) shall be fixed for a particular Virtual Channel on a given mission. The available fixed lengths are LSEGMENT = 256, 512 or 1024 octets (2048, 4096 or 8192 bits), with 512 octets being the preferred value since shorter lengths result in excessive overhead and ground computational speed requirements. The selected length shall be indicated in the header of the Transfer Frame, as described in Section 5.2.4(d).

Note that the total length of each Telemetry Segment will be (LSEGMENT+6) octets since the standard 48-bit Version 2 Segment Header always precedes the segment of data.

4.3.1 Segmentation Process. When using the Version 2 Telemetry Segment to perform segmentation, the process shall be as follows:

- (a) An unsegmented Version 1 Source Packet is input to the processor which performs the segmentation.
- (b) In the first segment, the Version Number is modified to indicate Version 2 (i.e. "100"), and the Segmentation Flags (Bits 0 and 1 of the Packet Sequence Control field) are modified from the "11" state (unsegmented) to the "01" state (first segment), as described in Section 3.1.2(a). In the first segment, the Packet Length field is unchanged and therefore indicates the length of the original packet WHICH HAS YET TO BE TRANSMITTED, including this segment. This field is then followed by the first (LSEGMENT) octets of the Secondary Header and Data Field of the original Version 1 packet.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

- (c) In continuation segments, the Version Number continues to indicate Version 2, the Segmentation Flags are set to the "00" configuration and the original Packet Length field is progressively decremented by $(n) \times (LSEGMENT)$ octets as each segment is transmitted, where $(n) = 1, 2, 3, \text{ etc.}$ according to the sequential number of the continuation segment.
- (d) In the last segment, which occurs when the original Packet Length field decremented by $(n) \times (LSEGMENT)$ octets contains a value which is less than or equal to $(LSEGMENT)$, the Version Number remains as Version 2, the Segmentation Flags are set to "10", and the Packet Length field then directly indicates the length of the residue of the original packet which is contained within the segment.

This process is illustrated in Figure 4-2, which shows how a Version 1 Source Packet whose overall length is 2106-octets (2100-octets of Secondary Header and Source Data plus 6-octets of Primary Header) is progressively broken into four 512-octet Version 2 Telemetry Segments of overall length 518-octets (512-octets of data plus 6-octets of Segment Header) and a last segment of overall length 58-octets (52-octets of data plus 6-octets of Segment Header). Note that the convention of:

"Indicated length = { (Number of octets) - 1 }"

is used for the Segment Length field, as defined in Section 3.1.3.

It should also be noted that it is permissible to generate Version 2 Telemetry Segments which have the Segmentation Flags set to "11" (unsegmented): in this case the Segment Length field indicates the length of the remainder of the Segment.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

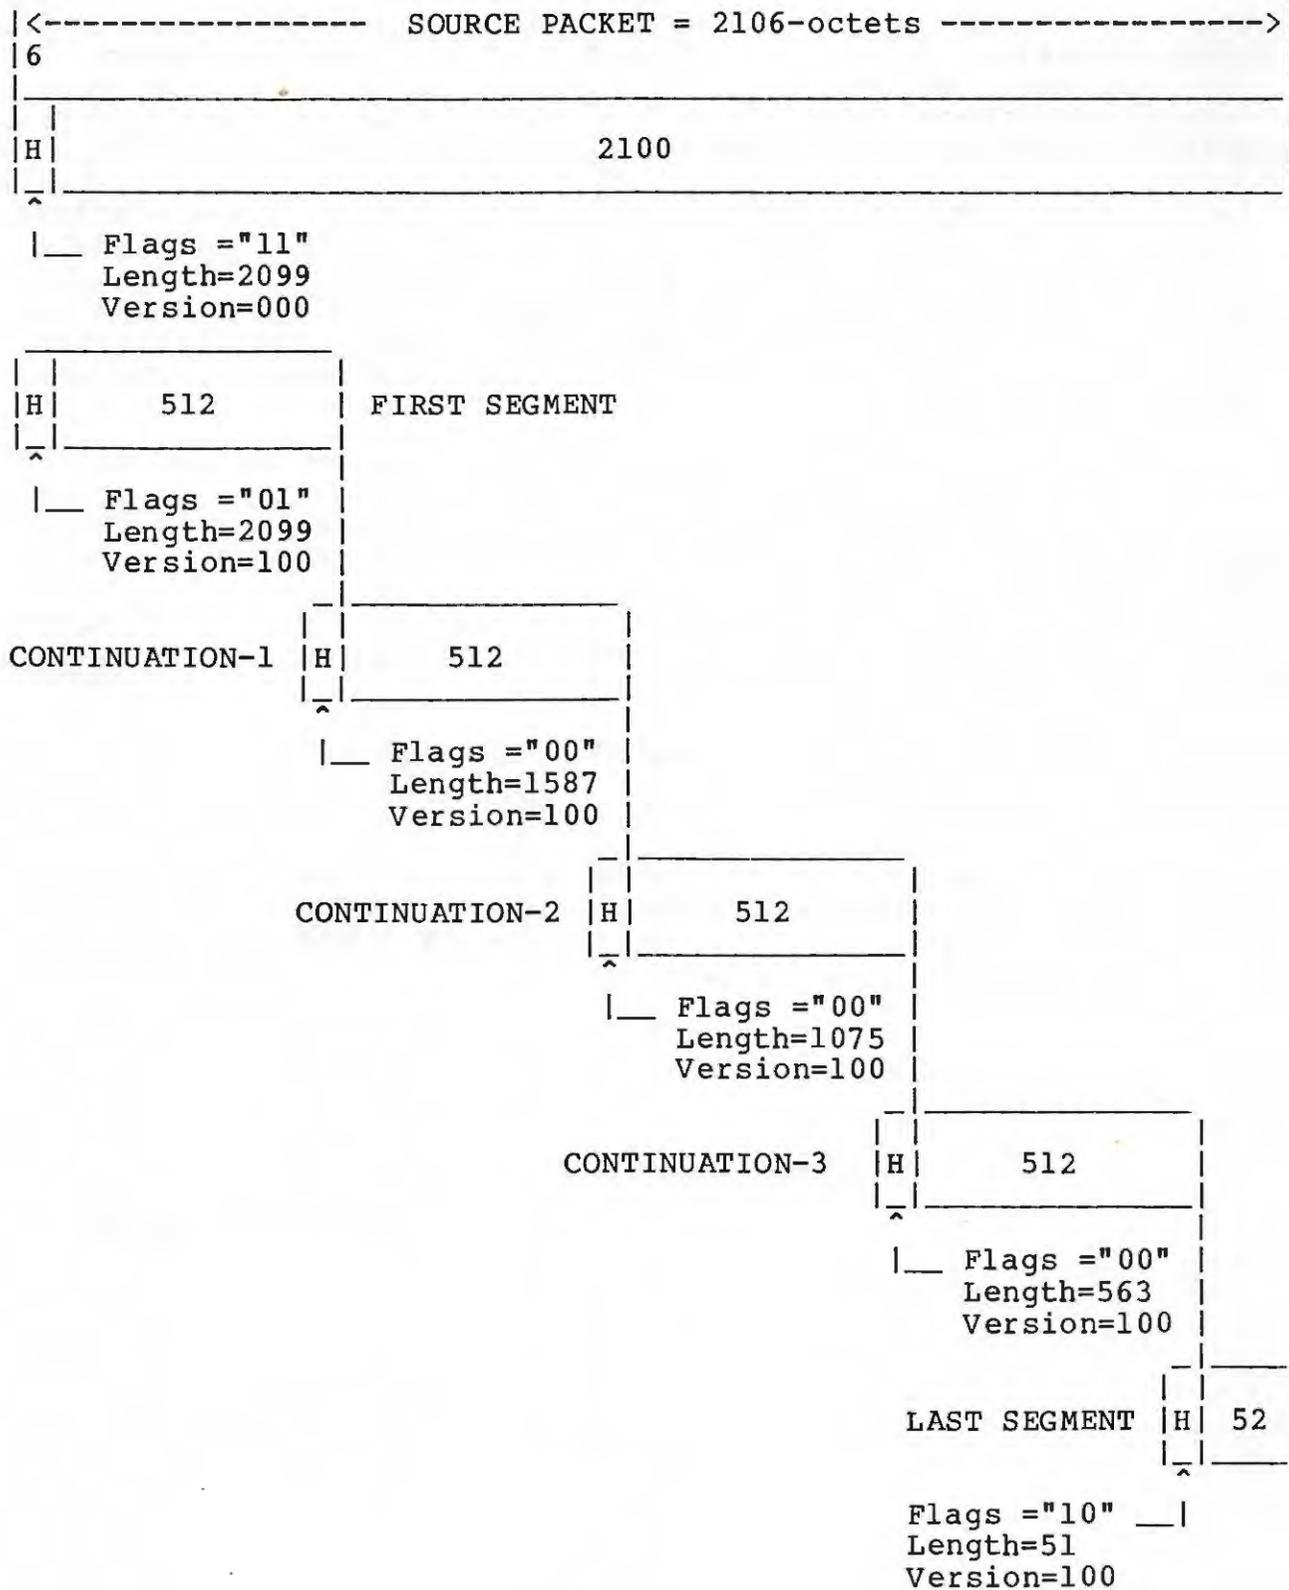


FIGURE 4-2: EXAMPLE OF THE SEGMENTATION PROCESS

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

Attention is drawn to the following features of this protocol:

1. It is possible to mix segmented and unsegmented Source Packets together on the same Virtual Channel, since every packet header contains a Version Number and self-specifying Segmentation Flags.

2. Within the ground processor which extracts Version 2 segments from the frame, the location of the Segment Headers may be determined from a simple test of the Last Segment flag in the Segment Sequence Control field:
 - (i) If the Last Segment flag is "0", then the next header will be found by counting forward by (LSEGMENT) octets after the end of the Segment Length field.
 - (ii) If the Last Segment flag is "1", then the next header will be found by counting forward by the number of octets indicated in the Segment Length field.

3. Since the fixed segment lengths are defined to be pure binary quantities (256, 512 or 1024 octets), then by implementing this decremting length approach the most significant bits of the Segment Length field will decrease in a binary countdown fashion as successive segments are transmitted. This information provides a "serial number" for the segment which may be used to recombine segments should their natural order be disturbed during transmission. For example, with 512-octet segments, the most significant octet of the length field will form this binary down-counter. Using the same case which is shown in Figure 4-2, the Length field thus would appear as follows:

Length Bit:	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15
1st. Segment:	0	0	0	0	1	0	0	0	0	0	1	1	0	0	1	1
Continuation-1:	0	0	0	0	0	1	1	0	0	0	1	1	0	0	1	1
Continuation-2:	0	0	0	0	0	1	0	0	0	0	1	1	0	0	1	1
Continuation-3:	0	0	0	0	0	0	1	0	0	0	1	1	0	0	1	1
Last Segment:	0	0	0	0	0	0	0	0	0	0	1	1	0	0	1	1

 Counter
 (= Segment
 serial #)

5 TRANSFER FRAME FORMAT

The Version 1 Source Packet or Version 2 Telemetry Segment data formats described in Sections 3 and 4 must be embedded within a data transfer structure for transmission across the downlink data channel which connects the spacecraft to a data capture element on the ground: this data structure is the "Transfer Frame". Multiple CCSDS standard versions of the Transfer Frame may be defined in the future; however, this issue of the Recommendation for Packet Telemetry only recognizes "Version 1" of the Transfer Frame format.

The Transfer Frame draws upon a layer of noisy channel services (e.g. carrier, modulation/detection, and coding/decoding) in order to establish the downlink data path. The error probabilities attainable within the noisy channel layer depend upon many factors, including received signal-to-noise ratio and coding scheme used. Digital encoding may be applied to the data channel in order to improve the system error performance. Although Packet Telemetry systems may be designed to tolerate channel noise in the same way that conventional systems have been designed in the past (i.e. by placing data within the frame in a predetermined sequence), full benefit from Packet Telemetry will require that a high quality data channel is provided so that packetized data may be ADAPTIVELY inserted into the frame. Reference [2] describes the CCSDS Recommendation for Telemetry Channel Coding, including specification of a convolutionally encoded inner channel concatenated with a Reed-Solomon block-oriented outer code. Although not mandatory, the recommended approach is to use the concatenated Reed-Solomon/convolutional encoding option since the data channel through which the frame is transmitted will then display virtually perfect data quality.

A mechanism must be provided to detect the presence of errors which may have been introduced within the frame during transmission through the downlink channel. If the recommended concatenated Reed-Solomon/convolutional coding is used, the Reed-Solomon error syndrome will indicate whether or not the frame is likely to contain an error. If Reed-Solomon encoding is NOT used, each Version 1 Transfer Frame must contain an error-detecting polynomial appended within its trailing octets: this polynomial may be used to determine if a frame is likely to contain an error.

The operational procedures for handling frames which contain a detected error are beyond the scope of this Recommendation and will therefore be negotiated between the Agencies when detailed cross-support agreements are formalized. This Recommendation also recognizes that Projects may desire to implement special "emergency" telemetry modes for the transmission of critical information in the event of potentially catastrophic behaviour, such as the loss of spacecraft attitude references. If these emergency modes are beyond the scope of this Recommendation, they will also be the subject of detailed cross-support agreements.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

Within a single physical data channel for a particular mission, the total length of the Version 1 Transfer Frame shall be a fixed, integral number of octets: the implemented length shall be specified to the ground network as a mission set-up parameter. Although each Agency may set specifications for the minimum length of the Version 1 Transfer Frame to be used on missions under its control, it is desirable to select a common maximum value for cross-support situations in order to avoid unnecessary variability and complexity. The maximum length has been computed for the case where the Transfer Frame is synchronously inserted into a Reed-Solomon codeblock structure. For cross-support situations, a Reed-Solomon interleave depth of five is recommended. Because the data space within this recommended (I= 5) Reed-Solomon codeblock has a fixed maximum length of 8920-bits, a standard maximum Version 1 Transfer Frame length of 8920-bits has been selected for missions which are cross-supported between CCSDS Agencies since this is compatible with synchronous insertion of the Frame into the codeblock data space. Figure 5-1 illustrates how a maximum length Version 1 Transfer Frame may be synchronously embedded in the standard Reed-Solomon codeblock.

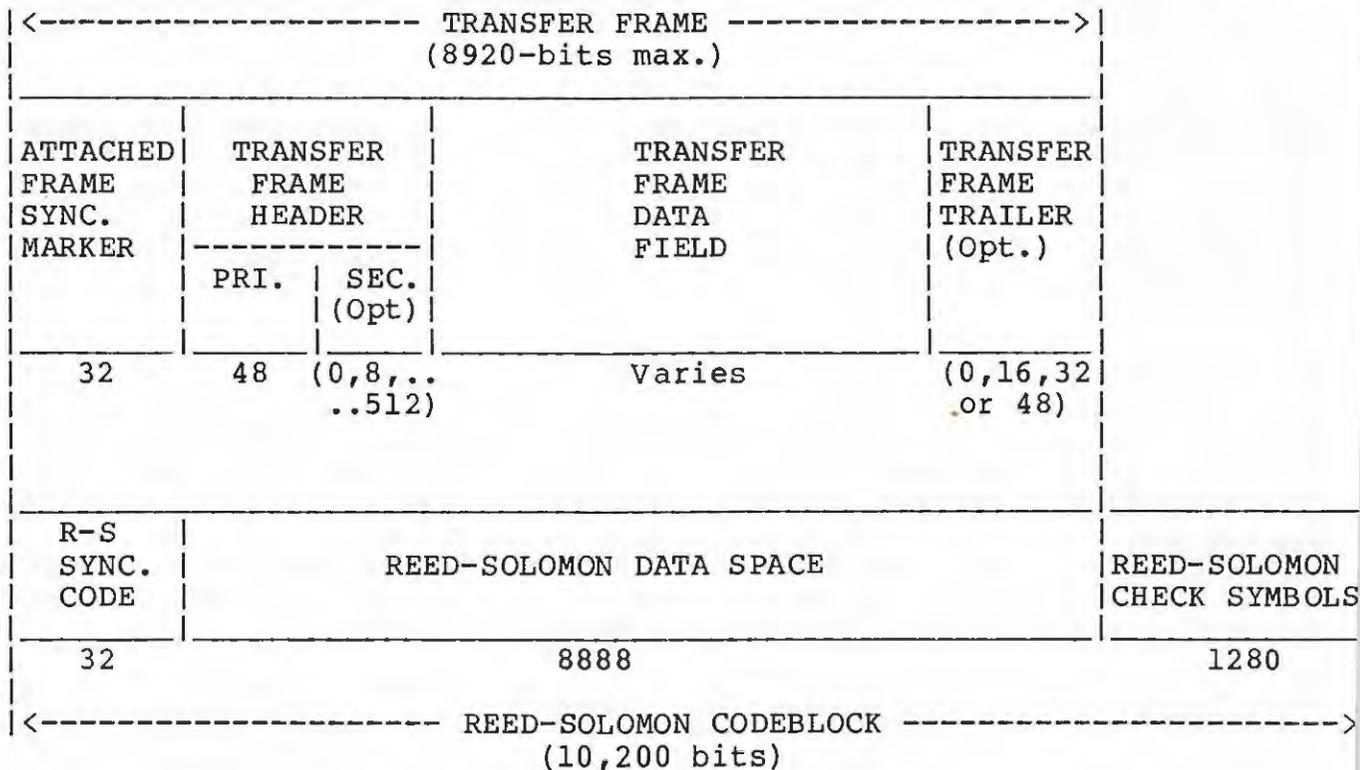


FIGURE 5-1: COMPOSITE VERSION 1 TRANSFER FRAME/
REED-SOLOMON CODEBLOCK FORMAT

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

The major fields of the composite Version 1 data structure shown in Figure 5-1 are as follows:

<u>Major Field</u>	<u>Length (bits)</u>
ATTACHED FRAME SYNCHRONIZATION MARKER	32 (Note-1)
TRANSFER FRAME PRIMARY HEADER	48
TRANSFER FRAME SECONDARY HEADER (Optional) ..	(0,8,16..512)
TRANSFER FRAME DATA FIELD	(Varies) (Note-2)
TRANSFER FRAME TRAILER (Optional)	(0,16,32,or48)

Total Length:	Up to 8920 (Note-2)

Notes:

1. As a transitional measure for the cross-support of ongoing missions, a 16-bit marker may be implemented if short frames are transmitted without Reed-Solomon coding, through a channel which displays good received signal-to-noise ratio characteristics.
2. The maximum frame length for cross-support is 8920-bits, which consists of: the Attached Synchronization Marker (32-bits); the mandatory Primary Header (48-bits); the optional Secondary Header (up to 512-bits); the Frame Data Field; and the optional Frame Trailer (16, 32 or 48-bits). The maximum length of the Data Field is therefore computed by subtracting the selected mandatory and optional components from 8920-bits. Caution: Projects which implement frame lengths shorter than the maximum, and which insert these frames synchronously into the chosen (I = 5) Reed-Solomon data space, must ensure that the correct amount of "Virtual Fill" is inferred by the ground decoder, as described in Reference [2].

5.1 ATTACHED FRAME SYNCHRONIZATION MARKER.

The Attached Frame Synchronization Marker delimits the boundaries of a fixed-length Transfer Frame. If the frame is not Reed-Solomon encoded, it is used by the ground network to acquire synchronization with the frame boundaries after transmission through the data channel. Rules for the two recognized "Cases" of attaching the Synchronization Marker to the Transfer Frame are described below:

CASE-A: When the frames are synchronously embedded within a Reed-Solomon codeblock, i.e. the frame fits exactly within the codeblock data space, then a 32-bit marker (WHICH IS COINCIDENT WITH AND IDENTICAL TO THE 32-bit REED-SOLOMON SYNCHRONIZATION CODE) shall be attached to the beginning of the frame. After Reed-Solomon decoding, the marker shall remain attached to the beginning of the frame.

CASE-B: When the frames are NOT Reed-Solomon encoded, a 32-bit marker shall be attached to the beginning of each frame. After frame synchronization has been performed by the ground network, the marker shall remain attached to the beginning of the frame.

All cross-supported missions using a packet telemetry format shall use the same frame synchronization marker to avoid the need to setup the ground-based PCM frame synchronizers in advance of every session. Care should be taken that this synchronization marker (or its reversed and/or complemented pattern) does not routinely appear in any other portion of the Transfer Frame. This does not preclude the occasional random presence of this pattern elsewhere in the frame. The marker should be chosen so that its bit pattern is different if read in reverse.

The exact pattern to be used for the Synchronization Marker in Case-A will be specified in Reference [2]. The pattern to be used for the Synchronization Marker in Case-B is specified in Annex B.

(Note: it is permissible to use the 8-bit "Master Frame Count" field in the Transfer Frame Header as a dynamic extension of the synchronization marker, for the purpose of facilitating the frame synchronization process).

5.2 TRANSFER FRAME PRIMARY HEADER.

The Transfer Frame Header is split into "Primary" and "Secondary" elements. The mandatory Primary Header provides services which are common to all missions. The optional Secondary Header, which is described in Section 5.3, permits the header information to be tailored to match the needs of different mission classes. The composite Transfer Frame structure, containing the Primary Header and Secondary Headers, plus the Frame Data Field and optional Frame Trailer, is shown in Figure 5-2.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

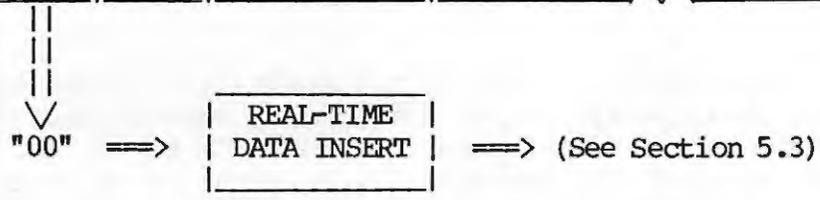
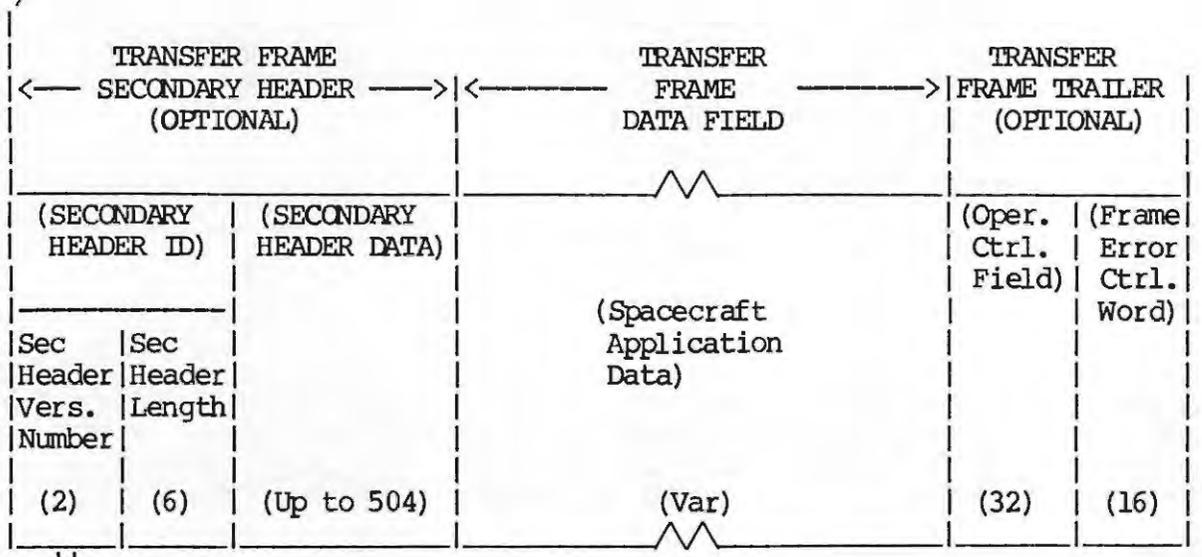
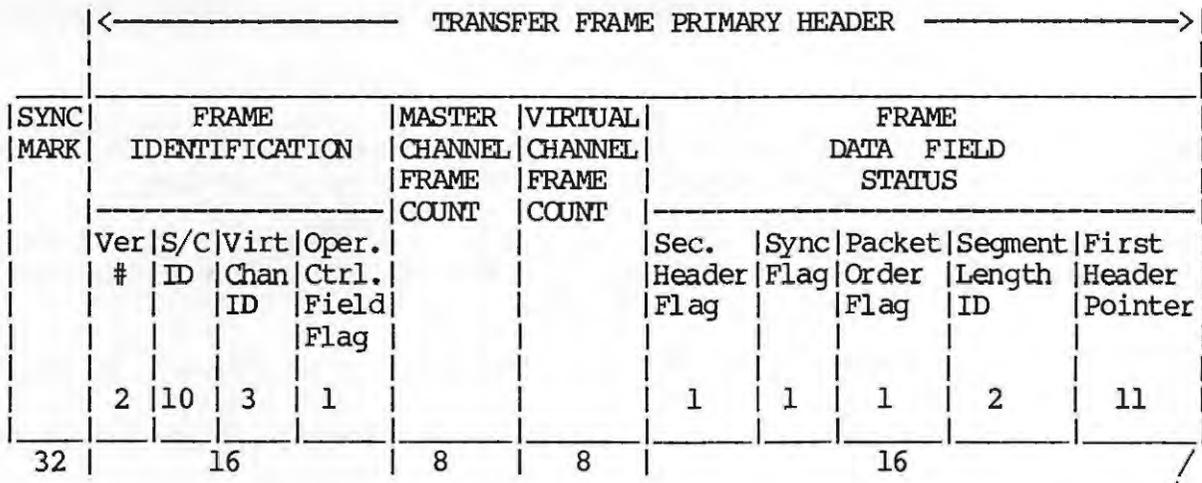


FIGURE 5-2: VERSION 1 TRANSFER FRAME HEADER FORMAT

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

The Primary Header performs four principal functions:

- (a) Identifying the Version of the Transfer Frame which is in use.
- (b) Identifying the spacecraft which transmitted the telemetered data.
- (c) Switching of the single physical data channel so that it may be logically multiplexed into several "Virtual Channels", and providing accounting mechanisms to detect missing frames.
- (d) Providing pointers and other control information so that variable-length Source Packet or Segment data may be extracted from the fixed-length Frame Data Field.

The VERSION 1 Transfer Frame Primary Header is composed of the following fields:

<u>Major Field</u>	<u>Length (bits)</u>
Frame Identification	16
- Version Number (2)	
- Spacecraft ID (10)	
- Virtual Channel ID (3)	
- Operational Control Field Flag (1)	
Master Channel Frame Count	8
Virtual Channel Frame Count	8
Frame Data Field Status	16
- Secondary Header Flag (1)	
- Synchronization flag (1)	
- Packet Order flag (1)	
- Segment Length ID (2)	
- First Header Pointer (11)	
	—
	48
	—

5.2.1 Frame Identification (16 bits). The purpose of this field is to identify which operational spacecraft created the frame of data, and to indicate if the physical data link is logically switched to form "Virtual Channels". The field is broken into four subfields:

- (a) Version Number (Bits 0,1).

These two bits (which occupy the two most significant bits of the sixteen bit field) are reserved for potential evolution of the Transfer Frame structure. One possible future use of this capability could be to extend the Spacecraft ID word if all ten bits become assigned. **At present, only Version 1 of the Frame Header is recognized (Bits 0,1 = "00").** The format of the remainder of the Version 1 header is as follows:

(b) Spacecraft Identifier (Bits 2 through 11).

These ten bits provide positive identification of the spacecraft node which created the frame of data. Different spacecraft identifiers will be assigned for flight vehicles, for developmental vehicles which are using the ground networks during prelaunch test operations, and for simulated data streams. The Secretariat of the Consultative Committee for Space Data Systems assigns spacecraft identifiers, as described in Reference [1].

(c) Virtual Channel Identifier (Bits 12,13,14).

The concept of using a "Virtual Channel" as a solution to the problem of long Source Packet segmentation was outlined in the introduction to Section 4. The concept may be implemented by defining different logical "types" of Transfer Frames, each of which is separately identified as a different Virtual Channel. Long Source Packets may thus be inserted only into their own dedicated "L" frame type, while shorter multi-user packets may be multiplexed together into a different "M" frame type. The composite physical stream of downlink Transfer Frames may then be created by interleaving logical frames with different "L" and "M" Virtual Channel identifiers. The effect on the long packet generating source will be similar to the Segmentation process described in Section 4, i.e. the packet will be broken into fixed blocks, the length of which will equal the length of the Data Field within the Transfer Frame. During times when the other source data are being transmitted within their "M" Type of frame, the long packet source data will be buffered until an opportunity occurs for the spacecraft to interleave an "L" Type frame containing a segment of that packet.

The Virtual Channel facility also allows complete frames of data from other spacecraft generating sources (e.g. tape recorder playback, relay links from other spacecraft) to be interleaved with real-time frames.

This 3-bit field enables up to eight "Virtual Channels" to be run concurrently by a particular spacecraft on a particular physical data channel. The sequence in which Virtual Channels are multiplexed is mission-dependent. If only one Virtual Channel is used, these bits shall be set permanently to "000".

(d) Operational Control Field Flag (Bit 15).

This 1-bit flag signals the presence (Bit 15 = "1") or absence (Bit 15 = "0") of the 32-bit Operational Control Field within the Frame Trailer (see Section 5.5).

5.2.2 Master Channel Frame Count (8 bits). The purpose of this field is to provide a running count of the number of frames which have been transmitted through a single spacecraft physical data channel. Some spacecraft may have the capability to create more than one physical data channel to the ground, in which case a separate counter will therefore be maintained for each channel. The counter must be long enough to provide a reasonable probability of detecting how many frames were missing if the physical channel is briefly interrupted. The 8-bit field represents a sequential count (modulo 256) of each Transfer Frame generated by the spacecraft on a given physical data channel.

5.2.3 Virtual Channel Frame Count (8 bits). The purpose of this field is to provide individual accountability for each of the eight "Virtual Channels". The 8-bit field represents a sequential count (modulo 256) of the total number of frames which have been transmitted in association with EACH of the virtual channels. It is used in association with the "Virtual Channel ID" field to maintain a separate counter for each of up to eight separate virtual channels.

5.2.4 Frame Data Field Status (16 bits). The purpose of this field is to provide control information necessary to enable Packets or Segments to be extracted from the Frame Data Field. The field is broken into the following subfields:

(a) Secondary Header Flag (Bit 0).

This 1-bit flag indicates the presence (Bit 0 = "1") or absence (Bit 0 = "0") of the optional Secondary Header in the Transfer Frame. If present, the Secondary Header shall immediately follow the Primary Header and the beginning of the Frame Data Field shall be correspondingly shifted.

If implemented, the Secondary Header shall appear in every frame transmitted through a physical data channel, and its length shall be fixed within that channel.

(b) Data Field Synchronization Flag (Bit 1).

The normal mode of inserting Packet/Segment data units into the Frame Data Field shall be to synchronously place them on octet boundaries so that they follow directly after each other. The Packets or Segments will thus be permitted to "spill over" into the next frame, and the location of the FIRST Packet/Segment header in a particular frame will be specified by the First Header Pointer field. For this synchronous insertion mode, the Data Field Synchronization Flag shall be set to a "0".

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

If a Project chooses to place Packet/Segment data ASYNCHRONOUSLY within the frame data field so that octet boundaries are not observed, then the Data Field Synchronization Flag within that frame shall be set to a "1". This situation may occur if the Project elects not to achieve onboard Packet/Segment bit re-justification when a tape recorder is replayed in reverse (thus dumping an unstructured bitstream into the data field), or if the source data do not otherwise conform to the Packet/Segment protocols. IF THIS FLAG IS SET TO A "1", INDICATING ASYNCHRONOUS DATA INSERTION, THE REMAINING FRAME DATA FIELD STATUS INFORMATION MAY NOT BE VALID, AND IT SHALL BE A PROJECT RESPONSIBILITY TO EXTRACT INFORMATION FROM THE FRAME DATA FIELD.

The synchronization status of the Packet/Segment data which are inserted into the Frame Data Field shall be indicated by setting the Data Field Synchronization Flag (Bit 1) as follows:

Bit 1 = 0 : Packet/Segment data are synchronously inserted.
Bit 1 = 1 : Packet/Segment data are asynchronously inserted.

(c) Packet Order Flag (Bit 2).

During normal real-time transmission of information from spacecraft sources to the ground, the Source Packets or Telemetry Segments inserted within the Frame Data Field (as they appear to the ground processor) will be "forward" justified, i.e. they will appear with their most-significant bit transmitted first, and with their sequence counters incrementing in an increasing order. The Packet Order Flag shall be used to indicate certain conditions where the ORDER of the sequence counters within the Packets or Segments may be reversed.

When contact with a ground station is not maintained, or when the transmission capacity of the downlink channel is less than the demands of the data sources, the spacecraft may record telemetry data on an onboard storage device. If this device is a tape recorder, then this Recommendation recognizes that it may be desirable to replay the recorder in a reverse direction, causing the order of the transmitted data to be reversed.

For CCSDS cross-supported missions the baseline requirement is that the spacecraft shall re-justify the BIT DIRECTION of any Packet/Segment data which have been replayed in reverse, prior to inserting them into the Transfer Frame, so that the most significant bit is transmitted first. This will require Packet/Segment synchronization logic at the output of the tape recorder to reverse the bit direction of each Packet/Segment as it is retrieved. Under these conditions, the ORDER of the Packet/Segment sequence counters will be observed to decrease rather than increase.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

(Note: if replayed Packets/Segments appear in reverse order, they must be multiplexed together on a separate Virtual Channel: it is not permissible to mix forward-ordered and reverse-ordered Packets/Segments within the same Virtual Channel since the Packet Order Flag would be ambiguous).

The ORDER of the sequence counts within the Packet/Segment data contained within the frame data field shall be indicated by setting the Packet Order Flag (Bit 2) as follows:

Bit 2 = 0 : Packet/Segment sequence count order is "forward".
Bit 2 = 1 : Packet/Segment sequence count order is "reverse".

A discussion of various options for handling tape recorded data is contained in the "Application Notes" (Annex E).

(d) Segment Length Identifier (Bits 3,4).

As discussed in Section 4, Version 2 Telemetry Segments may be implemented within a Virtual Channel as a method of controlling the flow of data from sources which generated very long packets. This 2-bit field identifies the selected maximum length of the standard Version 2 Telemetry Segment, if this option is being used within the Virtual Channel which is formed by the frame. The contents of the field are interpreted as follows:

00 = 256-octet segment
01 = 512-octet segment
10 = 1024-octet segment

If Version 2 Telemetry Segments and Version 1 Source Packets are mixed within the same Virtual Channel, the Version 1 packets may not be longer than the indicated maximum segment length. If the Version 2 Telemetry Segment is not being used within the Virtual Channel, the field shall be set to the "11" state.

(e) First Header Pointer (Bits 5 through 15).

Packet or Segment headers shall be aligned with octet boundaries within the Frame Data Field. The purpose of this field is to point directly to the location of the starting octet of the first Packet or Segment header structure. The location of any subsequent headers within the same Frame Data Field will be determined by a "chaining" procedure whereby the Packet Length field (Section 3.1.3) within each Packet/Segment header structure will be examined to determine where the following header begins.

This 11-bit field contains a binary count "P" (modulo 2048) which, when incremented by "1", points directly to the number of the octet within the Frame Data Field (STARTING AT OCTET # "1", WHICH BEGINS AT THE FIRST BIT OF THE FRAME DATA FIELD) that contains the first octet of the first Packet or Segment header structure. The count "P" is expressed as follows:

$$P = \{ (\text{Number of the octet}) - 1 \}$$

If the frame DOES NOT contain a Transfer Frame Secondary Header, the first bit of Octet # 1 within the Frame Data Field occurs immediately after the last bit of the Primary Header.

If the frame DOES contain a Secondary Header, then the first bit of Octet # 1 within the Frame Data Field occurs immediately after the last bit of the Secondary Header, i.e. it is offset by the length of the Secondary Header, which is specified within the Secondary Header Identification field. The value of the First Header Pointer is not affected by the existence of a Secondary Header.

If no Packet or Segment header structure starts in the Data Field, the First Header Pointer shall be set to "1111111111" ("all ones") This situation may occur if a long packet is segmented using the Virtual Channel technique.

If a Virtual Channel does not contain any valid Packet or Segment data, the First Header Pointer shall be set to "11111111110" ("all ones minus one"). This may be used to signal an "Idle Channel" if no real or fill packets are available for transmission within the frame.

Since Packets or Segments may begin at any point within the Frame Data Field, it is possible that a Packet/Segment header may be split between successive frames. The rules for handling this situation are as follows:

- (i) If the FIRST Packet/Segment header starts at the end of the Data Field within frame (N) and spills-over into frame (N+1), the First Header Pointer in frame (N) shall indicate the start of this Packet/Segment header.
- (ii) If ANY Packet/Segment header is split between frames (N) and (N+1), the pointer in frame (N+1) shall ignore the residue of the split header and shall only indicate the start of any subsequent new Packet/Segment header within frame (N+1).

5.3 TRANSFER FRAME SECONDARY HEADER (Optional).

The Transfer Frame Secondary Header is optional: its presence or absence is indicated by the Secondary Header Flag within the Primary Header. If implemented, the Secondary Header must be of fixed length and must appear in every frame transmitted through a physical data channel. Every Secondary Header shall begin with a single octet containing the "Secondary Header Identification", and shall have the general format indicated in Figure 5-2.

5.3.1 Secondary Header Identification (8-bits). This field defines the version and length of the Secondary Header: it is mandatory if a Secondary Header is present. It is separated into two subfields:

(a) Secondary Header Version Number (Bits 0,1).

This 2-bit subfield shall indicate which of up to four Secondary Header versions is being used. By changing the Version Number, future variations of the Secondary Header structure become possible. **At present, only Version 1 (Bits 0,1 = "00") is recognized,** and all other versions are reserved for future application. Within Version 1, the remainder of the Secondary Header format is defined as follows:

(b) Secondary Header Length (Bits 2 through 7).

This 6-bit subfield shall contain a binary count "S" of the total number of octets contained within the entire Transfer Frame Secondary Header (including the Secondary Header Identification field itself). The count "S" is expressed as follows:

$$S = \{ (\text{Total number of octets}) - 1 \}$$

When a Secondary Header is present, this count consequently may be used to compute the number of octet boundaries by which the first bit of the Frame Data Field is offset from the last bit of the Primary Header.

5.3.2 Secondary Header Data (n x 8-bits). For Version 1 of the Secondary Header, this field (which must contain an integral number of octets and can be up to 63-octets long) contains a "Real Time Data Insert" of information that is required for various spacecraft monitoring and control applications. Guidelines for implementing the Real Time Data Insert are presented in the "Application Notes" (Annex E).

5.4 TRANSFER FRAME DATA FIELD

This field, which must exist as an integer number of octets, contains user application data (e.g. Packets or Segments) to be transferred from the spacecraft to the ground.

Packets or Segments shall be inserted contiguously into the Data Field on octet boundaries, with the location of the octet containing the first header being indicated by the First Header Pointer in the frame header. Subsequent headers are located by examining the "length" field in each packet, or by counting forward by the fixed Telemetry Segment length, whichever is applicable.

When there are no data available for transmission from any source, an "Idle Packet" may be inserted by the spacecraft data system for the purpose of keeping the frame running synchronously. The Idle Packet shall have the format of a Version 1 Source Packet or a Version 2 Telemetry Segment, its Application Process ID shall read "all ones", and its length may equal the minimum-available packet size.

The maximum length of the Frame Data Field depends on whether the optional Transfer Frame Secondary Header and Transfer Frame Trailer fields are present, and on the length of the Synchronization Marker. As discussed in Reference [2], if frame lengths shorter than the 8920-bit maximum are implemented and the frame is encoded using the recommended Reed-Solomon algorithm, then the length of the Frame Data Field must be selected bearing in mind the constraint that "Virtual Fill" must occur in fixed increments.

5.5 TRANSFER FRAME TRAILER (Optional).

The Transfer Frame Trailer provides a mechanism for inserting the following optional information into the trailing octets of the frame:

- (a) An Operational Control Field, which facilitates closed-loop reporting of certain standardized real-time activities.
- (b) A Frame Error Control Word, which facilitates detection of errors which may have occurred within the frame.

5.5.1 Operational Control Field (32 bits) (Optional). The purpose of this field is to provide a standardized mechanism for reporting a small number of real-time functions (e.g. telecommand verification or spacecraft clock calibration). The leading bit of the field (Bit 0) is a "Type" flag that indicates which function is being reported.

A "Type 1" report (Bit 0 = "0") contains a "Command Link Control Word" which is used to provide acceptance reporting for spacecraft that are compatible with the Transfer Frame layer of the Packet Telecommand concept: the internal format of the Command Link Control Word is fully defined in Reference [3]. The format of a "Type 2" report (Bit 0 = "1") is currently undefined and is reserved for future application.

The presence or absence of this field is signalled by the Operational Control Field Flag within the Transfer Frame Primary Header. If present, the field must occur within EVERY frame transmitted through a physical data channel.

If the optional Frame Error Control Word is NOT present, the Operational Control Field occupies the four trailing octets of the Transfer Frame: if the Error Control Word IS present, the field is displaced towards the beginning of the frame by two octets.

5.5.2 Frame Error Control Word (16-bits) (Optional). The purpose of this 16-bit field is to provide a capability for detecting errors which may have been introduced into the frame during the data handling processes.

If the Transfer Frame is NOT Reed-Solomon encoded, the presence of the Frame Error Control Word is mandatory. The field is optional if the Frame is synchronously contained within the data space of a Reed-Solomon codeblock. If present, the field occupies the two trailing octets of the Transfer Frame. Presence or absence of the field is implied from the Spacecraft Identifier and is specified to the ground network as a mission set-up parameter.

Guidelines for generating the Frame Error Control Word are presented in Annex A.

ANNEX A:

TRANSFER FRAME ERROR DETECTION ENCODING/DECODING GUIDELINE

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex provides a description of the recommended error detection encoding/decoding procedure which is to be used within the Transfer Frame.

Status:

Final selection of an encoding polynomial to generate the 16-bit Frame Error Control Word is currently under study. Meanwhile, a recommended method is to encode the entire Transfer Frame (starting with the first bit of the Synchronization Marker and ending with the last bit of the Frame Trailer) into a binary cyclic block code using the HDLC/ADCCP generating polynomial described in this Annex.

A-1. ENCODING AND DECODING OF TRANSFER FRAMES USING THE ADVANCED DATA COMMUNICATION CONTROL PROCEDURE (ADCCP) FRAME CHECK SEQUENCE (FCS) PROCEDURES

This Annex describes the error detection encoding/decoding procedure that is recommended for Transfer Frame coding.

Parity encoding is mandatory if the Transfer Frame is NOT Reed-Solomon encoded prior to transmission. If error detection coding of the Transfer Frame is performed, it is recommended that it should be compatible with the procedures described in this Annex. This does not preclude the use of a more powerful error detection code than that described herein provided that all codewords of the more powerful code are also codewords of the Advanced Data Communications Control Procedure (ADCCP) code. This implies that the generating polynomial of the more powerful code must be divisible by the ADCCP generating polynomial and that the more powerful code adopts the presetting procedures to be described.

Commercially available integrated circuits can be purchased to perform the encoding/decoding functions. If these modules are used it may not be necessary for the user to be concerned with the details of the coding procedure.

The ADCCP code has the following capabilities when applied to an encoded block of less than $32,768 (2^{15})$ bits:

- (1) All error sequences composed of an odd number of bit errors will be detected.
- (2) All error sequences containing two-bit errors anywhere in the encoded block will be detected.
- (3) If a random error sequence containing an even number of bit errors (greater than or equal to 4) occurs within the block, the probability that the error will be undetected is approximately 2^{-15} (or $\approx 3 \times 10^{-5}$).
- (4) All single error bursts spanning 16 bits or less will be detected provided no other errors occur within the block.
- (5) This code is only intended for error detection purposes and no attempt should be made to utilize it for error correction, since it would falsely decode some blocks containing double errors.

A-1.1 ENCODING PROCEDURE

The encoding procedure accepts an $(n-16)$ -bit data block and generates a systematic binary $(n, n-16)$ block code by appending a 16-bit Frame Check Sequence (FCS) as the final 16 bits of the block. This FCS is inserted into the Frame Error Control Word of the Transfer Frame Trailer. The equation for the FCS is:

$$\text{FCS} = [X^{16} \cdot M(X) \oplus X^n \cdot L(X)] \text{ modulo } G(X)$$

where: $M(X)$ is the $(n-16)$ -bit message to be encoded expressed as a polynomial with binary coefficients

$L(X)$ is the presetting polynomial given by:

$$L(X) = \sum_{i=0}^{15} x^i \quad (\text{all "1" polynomial of order 15})$$

$G(X)$ is the CCITT Recommendation V.41 generating polynomial given by:

$$G(X) = X^{16} + X^{12} + X^5 + 1$$

n is the number of bits in the encoded message

\oplus is the modulo 2 addition operator (Exclusive OR)

Note that the encoding procedure differs from that of a conventional cyclic block encoding operation in that:

- (1) The $X^n \cdot L(X)$ factor has the effect of presetting the shift register to an all "1" state (rather than a conventional all "0" state) prior to encoding.

A-1.2 DECODING PROCEDURE

The error detection syndrome, $S(X)$, is given by

$$S(X) = [C^*(X) \oplus X^n \cdot L(X)] \text{ MODULO } G(X)$$

where $C^*(X)$ is the received block in polynomial form and,

$S(X)$ is the syndrome polynomial which will be zero if no error is detected and non-zero if an error has been detected.

ANNEX B:

TRANSFER FRAME SYNCHRONIZATION MARKER

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex specifies the bit pattern to be used for the Attached Synchronization Marker when the Transfer Frames are NOT Reed-Solomon encoded.

Status:

The exact pattern of the 32-bit marker is currently under study.

ANNEX C:

SOURCE PACKET SECONDARY HEADER FORMAT GUIDELINE

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex provides preliminary guidelines for the structure of the Secondary Header containing the results of onboard application processes which aid the interpretation of the source data set encapsulated within a Version 1 Source Packet.

Status:

This Annex is currently under development by the CCSDS.

C-1 OVERVIEW.

The Secondary Header provides the capability for insertion of ancillary and correlative data which increase the processing autonomy of the Source Data contained within a packet. Candidate information for inclusion within the Secondary Header includes measurement time, spacecraft attitude, instrument pointing information, etc. The CCSDS has not yet formulated a comprehensive guideline for the format of the Source Packet Secondary Header; therefore, this Annex only contains preliminary information.

One important parameter which may be needed in the Secondary Header is a time-tag which, when concatenated with the Source Sequence Count, provides unique identification of the packet. This time-tag must be included if the user requires that the ground network provides long-term packet management and accounting services (archiving, correlation with other data sets, etc.). Since these long-term services have potential cross-support significance, the CCSDS has made the following provisional recommendations with respect to Secondary Headers:

- (i) The presence of a Secondary Header is optional, and may be included at the discretion of the local user or Project organization. The presence or absence of a Secondary Header is signalled by the Secondary Header Flag within the packet header. As a minimum requirement, the Secondary Header shall contain a timecode which references the packet to a known epoch.
- (ii) The timecode which is selected for use within the Source Packet Secondary Header shall conform to the CCSDS Recommendation for Timecode Formats, Reference [4].

C-2 CONTENTS OF THE SECONDARY HEADER.

When a Secondary Header is present within a Source Packet, it shall be structured according to Figure C-1.

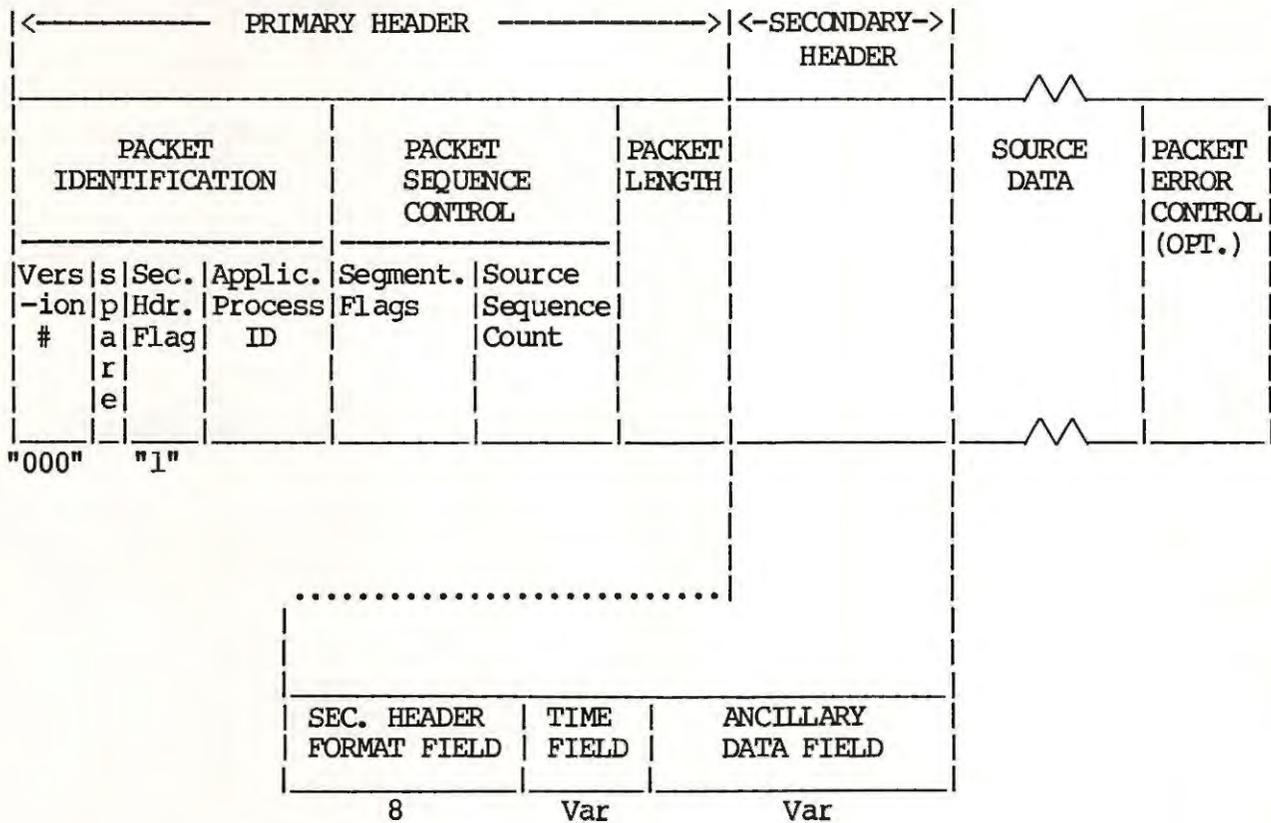


FIGURE C-1: SOURCE PACKET SECONDARY HEADER STRUCTURE

C-2.1 SECONDARY HEADER FORMAT FIELD

The internal format of this 8-bit field is currently under study by the CCSDS.

C-2.2 TIME FIELD

The format of this field is currently under study by the CCSDS. The contents of the field shall be compatible with the CCSDS Timecode Formats specification, Reference [4].

C-2.3 ANCILLARY DATA FIELD (optional)

The internal format of this field is currently under study by the CCSDS.

ANNEX D:

SOURCE PACKET ERROR DETECTION ENCODING/DECODING GUIDELINE

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex provides a description of the recommended error detection encoding/decoding procedure which is to be used within the Source Packet.

Status:

This Annex is currently under development by the CCSDS. As an interim measure until this Annex is supplied, it is suggested that the specification contained in Annex-A may be used for Source Packet error control.

ANNEX E:

"APPLICATION NOTES" FOR PACKET TELEMETRY

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

The Packet Telemetry formats defined in this Recommendation are layered so that various levels of interface compatibility are possible. This Annex describes how a Project may implement complete or partial compatibility with Packet Telemetry.

Status:

This Annex is currently under development by the CCSDS, and is therefore incomplete. The following items are included for information.

1. Section 5.2.4 (c): Packet Order Flag.

Three recognized options exist for implementing reverse tape recording modes:

- (i) The complete telemetry stream may be recorded as a series of Telemetry Frames. This entire stream may then later be replayed in reverse direction and dumped to the ground OVER A PHYSICAL DATA CHANNEL WHICH IS SEPARATE FROM THAT USED TO TRANSMIT REAL-TIME DATA. In this case, the Packet Order Flag shall indicate the status of the Packets or Segments when the frames were originally recorded.
- (ii) The complete telemetry stream may be recorded as a series of Telemetry Frames, each having their Packet Order Flag set as appropriate during recording. This entire stream may then later be replayed in reverse direction as a pure bitstream for insertion within the Data Field of new frames which form a separate playback Virtual Channel. These playback frames may then be interleaved with other frames which form Virtual Channels that contain real-time Packets or Segments. In this case the replayed bitstream will be inserted into the playback Virtual Channel asynchronously, with the "Data Field Synchronization Flag" for this channel set to a "1" and the Packet Order Flag consequently ignored. (Note: precautions must be taken to ensure that the replayed synchronization marker occurring periodically within the frame data field does not interfere with the overall frame synchronization strategy. As an example, the reverse-justified synchronization marker should be distinguishable from the forward-justified pattern.)
- (iii) Packets or Segments may be recorded with or without first encapsulating them within Transfer Frames. These Packets or Segments may later be replayed in reverse direction, and re-synchronized onboard the spacecraft for normal insertion into the Data Field of new real-time Transfer Frames.

2. Section 5.3.2: Real Time Data Insert.

The format, utilization and operational procedures associated with the Real Time Data Insert field are all mission-dependent and shall be the subject of detailed cross-support agreements between the Agencies involved.

ANNEX F:

RATIONALE FOR PACKET TELEMETRY

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex presents some of the rationale which led to the evolution of the Packet Telemetry concept.

Status:

This Annex is complete.

F-1 PACKET TELEMETRY RATIONALE

Packet Telemetry represents an evolutionary step from the traditional Time-Division Multiplex (TDM) method of transmitting scientific, applications, and engineering data from spacecraft sources to users on the ground. The Packet Telemetry process conceptually involves:

- (1) Encapsulating, at the source, experiment observational data together with the ancillary data used to subsequently interpret the observational data, thus forming an autonomous "packet" of information in real time on the spacecraft.
- (2) Providing a standardized mechanism whereby autonomous packets from multiple data sources on the spacecraft can be inserted into a common "frame" structure for transfer to the ground through noisy data channels, and delivered to facilities where the packets may be extracted for delivery to the user.

The packet telemetry process has the conceptual attributes of:

- (1) Facilitating the acquisition and transmission of instrument data at a rate appropriate for the phenomenon being observed.
- (2) Defining a logical interface and protocol between an instrument and its associated ground support equipment which remains constant throughout the life-cycle of the instrument (bench test, integration, flight, and possible re-use).
- (3) Simplifying overall system design by allowing a microprocessor-based symmetric design of the instrument control and data paths ("command packets in, telemetry packets out") compatible with commercially available components and interconnection protocol standards.
- (4) Eliminating the need for mission-dependent hardware and/or software at intermediate points within the distribution networks through which space data flows; in particular, enabling the multimission components of these networks to be designed and operated in a highly automated fashion, with consequent cost and performance advantages.
- (5) Facilitating interoperability of spacecraft whose telemetry interfaces conform to these guidelines, i.e., allowing very simple cross-strapping of spacecraft and ground network capabilities between Agencies.
- (6) Enabling the delivery of high-quality data products to the user community in a mode which is faster and cheaper than would be possible with conventional telemetry.

ANNEX G:
SUMMARY OF SEGMENTATION OPTIONS

(THIS ANNEX IS NOT PART OF THE RECOMMENDATION)

Purpose:

This Annex provides a summary of the various options which exist for segmenting very long Source Packets, in order to achieve flow control through the space-to-ground data channel.

Status:

This Annex is complete.

G-1. SEGMENTATION SUMMARY.

Several options for segmenting long Source Packets are specified in Sections 4 and 5 of the Recommendation for Packet Telemetry. In selecting the segmentation method to be used for a particular mission, the following system considerations may be important:

- (a) Segmentation should not introduce extra overhead into short packets which have no need to be segmented.
- (b) It should be possible to mix short unsegmented packets on the same virtual channel with long source packets which have been divided into segments.
- (c) It is highly desirable to implement a solution which uses a single protocol for both segmented and unsegmented packets, in which data fields are interpreted in singular, consistent ways.
- (d) For a given mission, a fixed maximum segment length should be selected. When long packets are broken into segments, the segment lengths may be equal to the mission-fixed maximum, except for the last segment which may contain the residue of the original packet.
- (e) The segmentation solution should involve the simplest possible algorithms for extracting the packets and segments from the Transfer Frame, and for reconstituting the packets, since these algorithms must operate at full incoming telemetry bit rate.

Table G-1 presents a summary of the major attributes of the various alternative methods.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY

OPTION:	PRINCIPLE:	SEGMENTS FORMED BY:	GROUND PROCESSOR USES:	USER RECEIVES:	OVERHEAD:
Source - internal using Version-1 Source Packet (4.1)	Use Source Sequence Counter to identify each segment within the Packet	Source	Packet Sequence Count and Length fields to extract segments.	Segments	6-octets/segment + 4-octets (length & count) in the first segment
Spacecraft segmentation using Version-1 Source Packet (4.2)	Nest the user Source Packet within an "outer" spacecraft Source Packet	Spacecraft data system	Outer spacecraft Source Packet to extract and recombine segments.	Source Packet	6-octets/segment + 6-octets (original header) in the first segment
Spacecraft segmentation using Version-2 Telemetry Segment (4.3)	Source Packet length field decremented by fixed binary Segment Length	Spacecraft data system	Known fixed length to extract each segment; inferred sequence to recombine them.	Source Packet	6-octets/segment.
Virtual Channelization (5.2.2 b)	Long Packets assigned to their own dedicated Transfer Frame	Spacecraft data system	Virtual Channel ID in Transfer Frame header	Source Packet	Depends on design: may be zero.

TABLE G-1: SUMMARY OF SEGMENTATION OPTIONS

